

[Manuals.plus](#) /

› [DARKFANG](#) /

› DARKFANG Tactical Flashlight DF1132 User Manual

DARKFANG DF1132

DARKFANG Tactical Flashlight DF1132 User Manual

INTRODUCTION

Thank you for choosing the DARKFANG Tactical Flashlight DF1132. This powerful and versatile LED flashlight is designed for outdoor activities, hunting, and sports shooting, offering 1450 lumens of brightness and compatibility with both Picatinny and M-LOK mounting systems. This manual provides essential information for the safe and effective use, installation, and maintenance of your device.

SAFETY INSTRUCTIONS

- Do not look directly into the light beam. The high intensity light can cause temporary vision impairment or eye damage.
- Keep out of reach of children.
- Do not disassemble the flashlight. This may void the warranty and cause damage.
- Use only the provided charging cable and ensure proper charging conditions.
- Avoid exposing the flashlight to extreme temperatures or direct sunlight for prolonged periods.
- Ensure the flashlight is securely mounted before use to prevent accidental detachment.

PACKAGE CONTENTS

Verify that all items are present in your package:

- DARKFANG Tactical Flashlight DF1132
- Magnetic Charging Cable
- Picatinny Rail Clamp
- M-LOK Mount
- M-LOK Screws

- Long Mounting Screws
- Hex Keys (Allen wrenches)
- 3mm M-LOK Spacers (2 pieces)
- User Manual



Figure 1: All components included with the DARKFANG Tactical Flashlight DF1132, including the flashlight, various mounts, screws, hex keys, charging cable, and user manual.

PRODUCT OVERVIEW

Familiarize yourself with the different parts of your DARKFANG Tactical Flashlight:

Innovative Tactical Light

One-push button to enter strobe mode

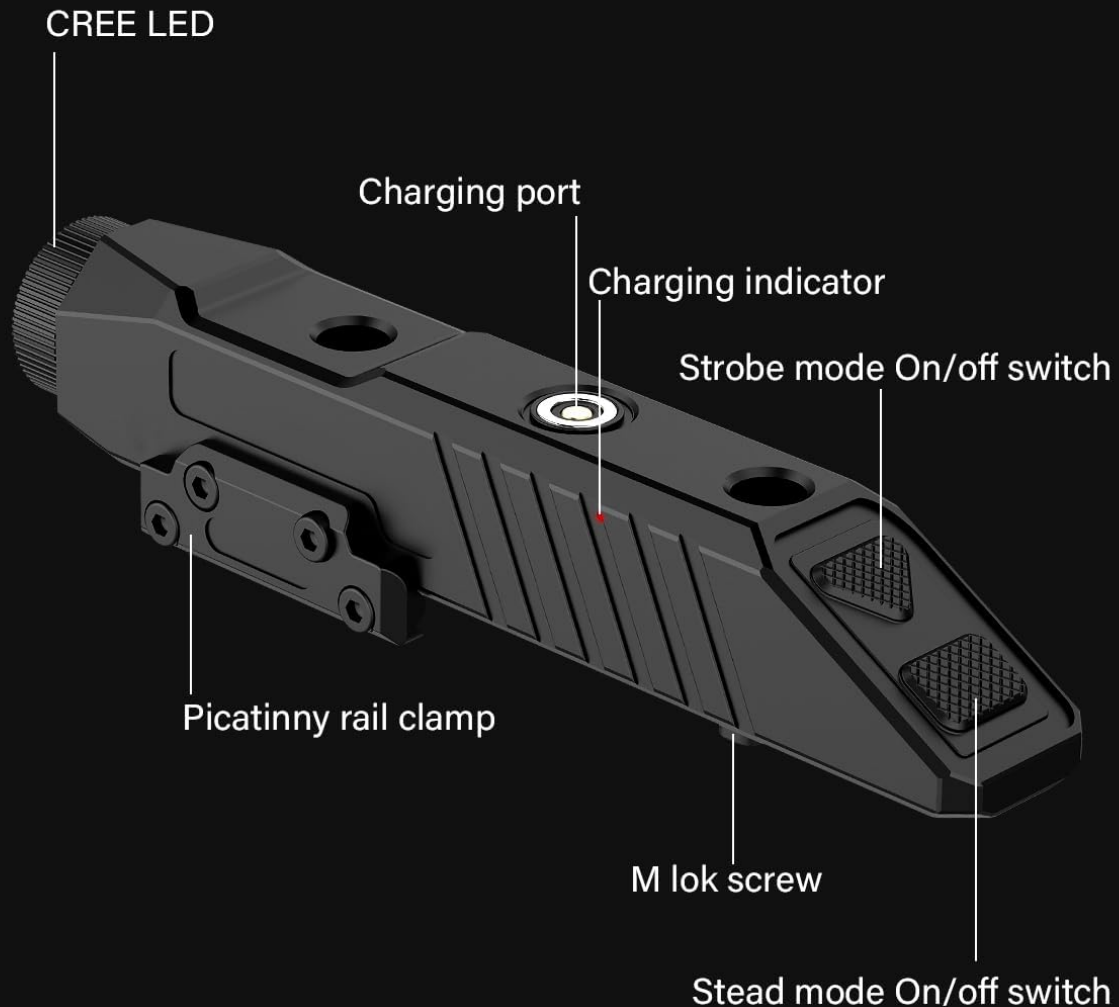


Figure 2: Labeled components of the flashlight, including the CREE LED, charging port, charging indicator, strobe mode on/off switch, Picatinny rail clamp, M-LOK screw, and steady mode on/off switch.

- **CREE LED:** High-performance light source.
- **Charging Port:** Magnetic connection point for charging.
- **Charging Indicator:** LED light indicating charging status.
- **Strobe Mode On/Off Switch:** Activates and deactivates strobe mode.
- **Picatinny Rail Clamp:** For mounting on Picatinny rails.
- **M-LOK Screw:** For mounting on M-LOK systems.
- **Steady Mode On/Off Switch:** Activates and deactivates constant light mode.

SETUP AND INSTALLATION

Mounting the Flashlight

The DARKFANG DF1132 is compatible with both Picatinny and M-LOK mounting systems. Choose the appropriate mount and hardware for your setup.

Picatinny Mounting:

1. Attach the Picatinny rail clamp to the flashlight using the provided screws and hex key.
2. Align the flashlight with your Picatinny rail.
3. Securely tighten the clamp screws onto the rail using the hex key.

M-LOK Mounting:

1. Attach the M-LOK mount to the flashlight using the provided screws and hex key.
2. Insert the M-LOK screws through the mount and into the M-LOK slots on your handguard.
3. Rotate the M-LOK screws to engage the T-nuts with the handguard.
4. Tighten the M-LOK screws firmly using the hex key.
5. If there is a gap (up to 3mm) between the flashlight and an MOE handguard, use the included 3mm M-LOK spacers to bridge the gap for a secure fit.

2pcs 3mm MLOK Spacers included help bridge the MOE gap($\leq 3\text{mm}$)

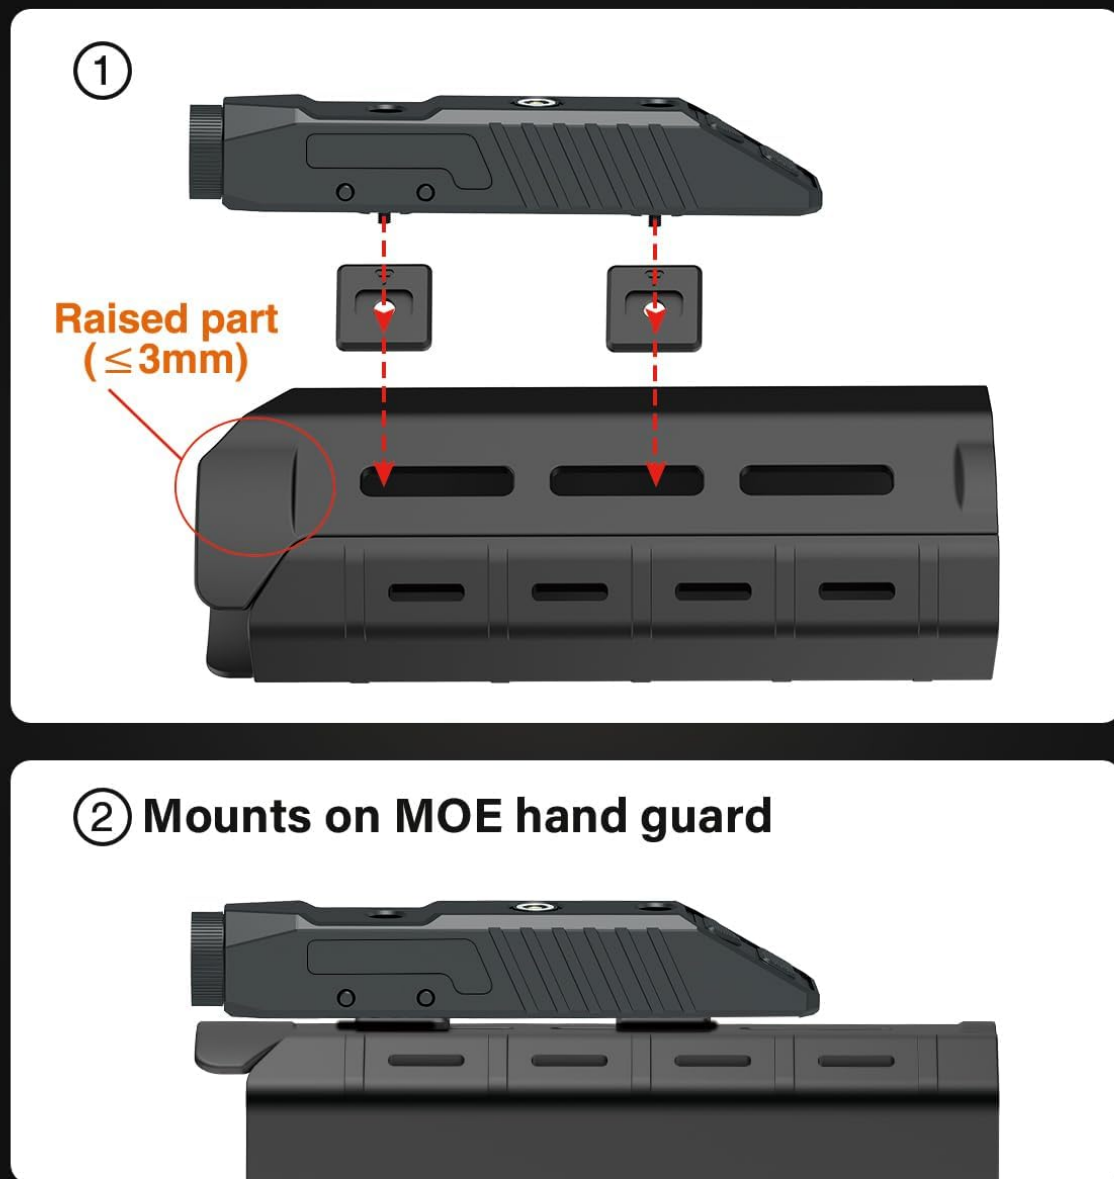


Figure 3: Illustration of using 3mm M-LOK spacers to ensure a flush mount on MOE handguards and proper M-LOK installation.

OPERATING INSTRUCTIONS

Powering On/Off and Mode Selection

The flashlight features two distinct modes: Steady (constant light) and Strobe (flashing light).

One-push to Strobe

0.01s enter strobe mode at emergency



Figure 4: Dedicated buttons for activating Strobe mode and Steady mode.

- **Steady Mode:** Press the 'Stead mode On/off switch' (located towards the rear, as shown in Figure 2) to turn on the constant light. Press again to turn off.
- **Strobe Mode:** Press the 'Strobe mode On/off switch' (located towards the front, as shown in Figure 2) to activate the flashing strobe light. Press again to turn off. This mode can be activated quickly for emergency situations.

Charging the Battery

The DARKFANG DF1132 is equipped with an integrated rechargeable Lithium-polymer battery and uses a magnetic charging system.

1. Connect the magnetic charging cable to a USB power source (e.g., wall adapter, computer USB port).

2. Attach the magnetic end of the cable to the charging port on the flashlight. The magnet will ensure proper alignment.
3. The charging indicator light will illuminate **red** during charging.
4. Once charging is complete, the indicator light will turn **green**.
5. Disconnect the charging cable when the battery is fully charged.

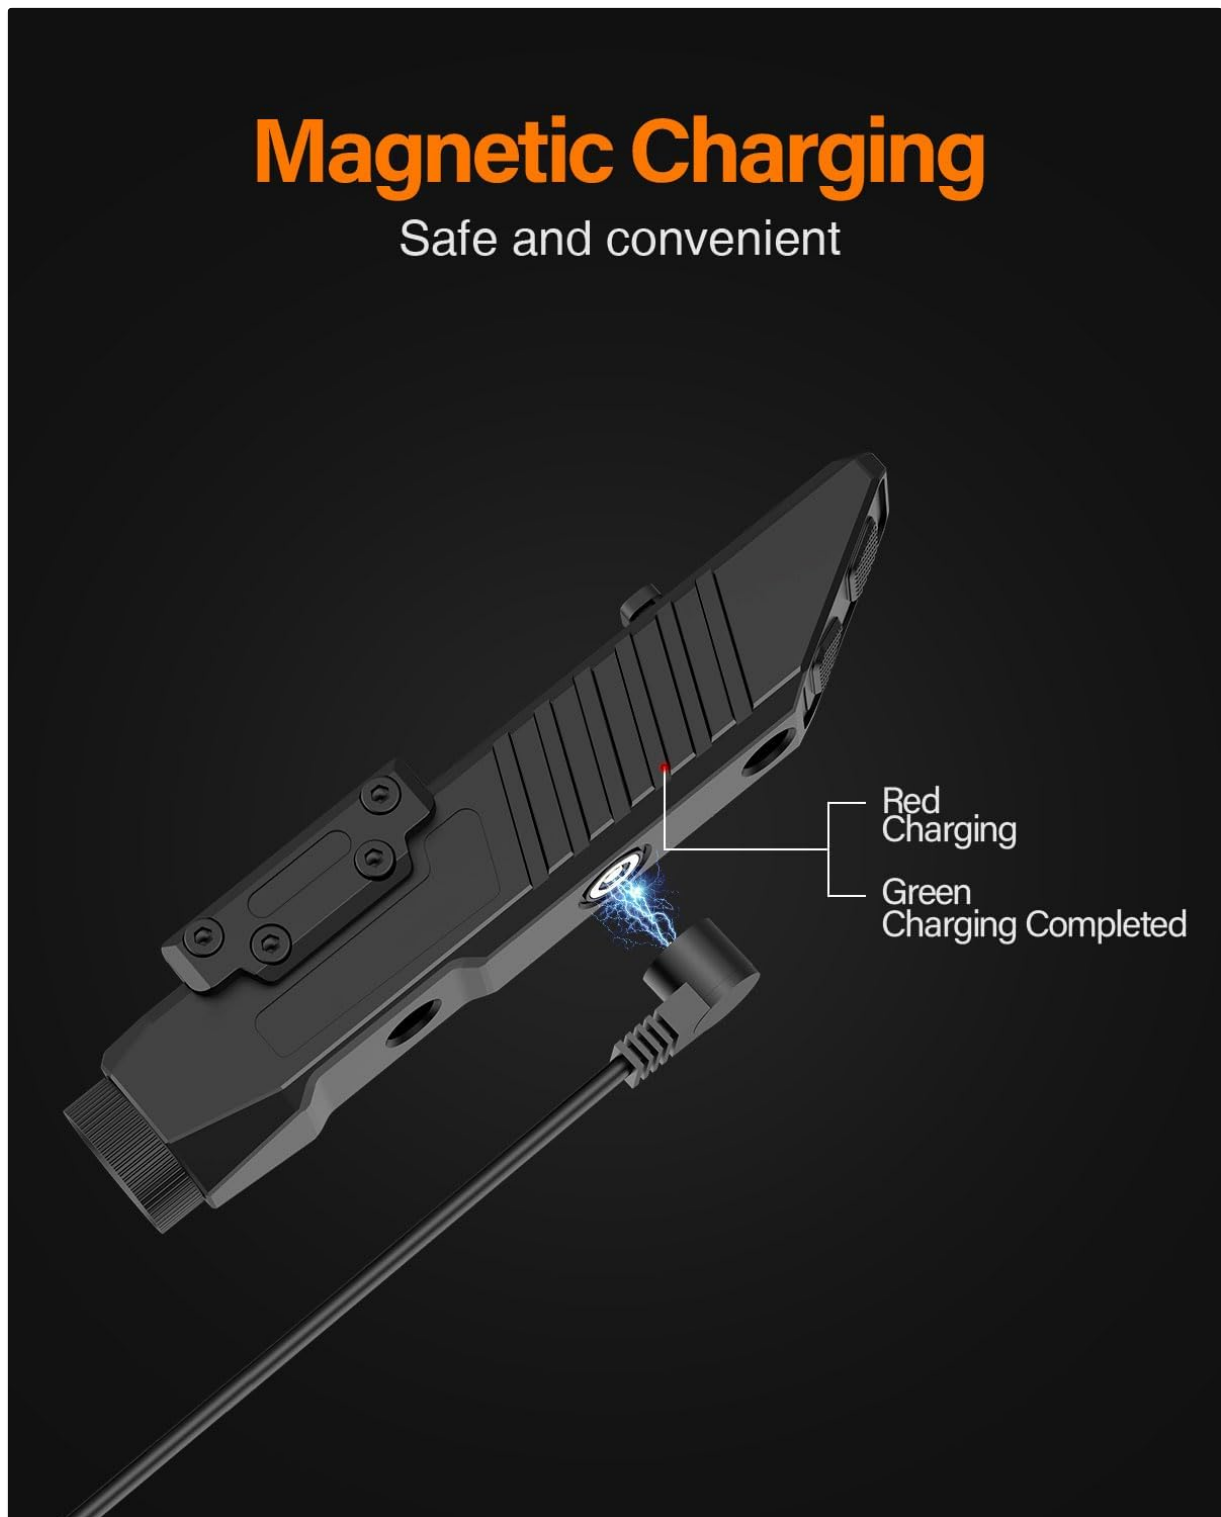


Figure 5: Magnetic charging in progress (red indicator) and charging completed (green indicator).

MAINTENANCE

- **Cleaning:** Wipe the flashlight body with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Storage:** Store the flashlight in a cool, dry place away from direct sunlight when not in use. For long-

term storage, ensure the battery is partially charged (around 50%) to prolong its lifespan.

- **Water Resistance:** The flashlight is IPX6 water-resistant, meaning it can withstand powerful water jets. Do not submerge it in water.


TROUBLESHOOTING

Problem	Possible Cause	Solution
Flashlight does not turn on.	Battery is depleted.	Charge the flashlight using the magnetic charging cable.
Flashlight does not charge.	Charging cable not properly connected or faulty.	Ensure the magnetic cable is securely attached to the charging port and the USB end is connected to a working power source. Try a different USB port or adapter.
Light output is dim.	Low battery level.	Recharge the battery fully.
Flashlight detaches from mount.	Mounting screws are loose.	Re-tighten all mounting screws securely using the hex key. Ensure correct mount type and spacers are used for M-LOK.

SPECIFICATIONS

Aluminum Alloy

CREE LED inside

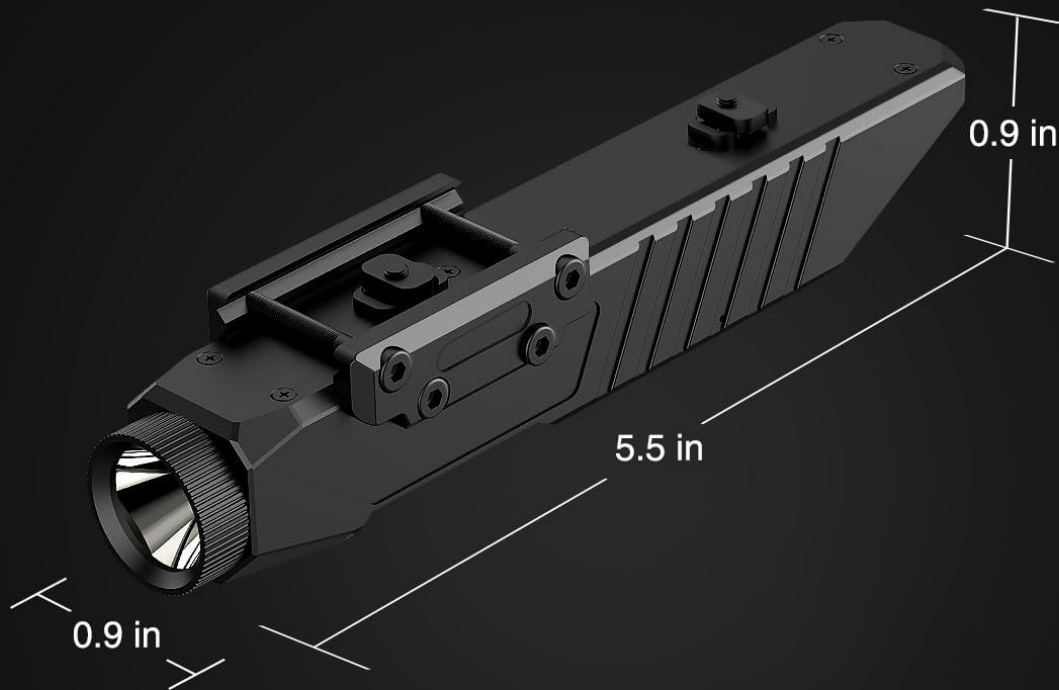

Light Brightness
1450lm MAX



Beam Distance
240m



Running Time
75mint



Water-resistant
IPX6

Figure 6: Key specifications including dimensions, light output, beam range, battery life, and water resistance rating.

- **Model Number:** DF1132
- **Light Source:** CREE LED
- **Brightness:** 1450 Lumens (Max)
- **Beam Distance:** Up to 240 meters
- **Battery:** 1 x Integrated Lithium-polymer (included)
- **Run Time:** Approximately 75 minutes (on max brightness)
- **Charging:** Magnetic USB Charging
- **Material:** Durable Aircraft Aluminum
- **Finish:** Type III Hard Anodized

- **Water Resistance:** IPX6 (Waterproof against powerful water jets)
- **Drop Resistance:** 1.5 meters
- **Dimensions (L x W x H):** 14 x 2.3 x 2.3 cm (5.5 x 0.9 x 0.9 inches)
- **Weight:** 200 grams
- **Color:** Black

WARRANTY INFORMATION

DARKFANG products are manufactured to high-quality standards. For specific warranty terms and conditions, please refer to the warranty card included with your purchase or visit the official DARKFANG website. Keep your proof of purchase for any warranty claims.

CUSTOMER SUPPORT

If you encounter any issues or have questions regarding your DARKFANG Tactical Flashlight DF1132 that are not covered in this manual, please contact DARKFANG customer support. Contact details can typically be found on the product packaging or the official DARKFANG website.