Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Kircuit Kircuit AC/DC Adapter for StarTech DK30CH2DPPD

Kircuit AC/DC Adapter User Manual

Model: Kircuit AC/DC Adapter for StarTech DK30CH2DPPD

Introduction

This manual provides essential information for the safe and effective use of your Kircuit AC/DC Adapter. This adapter is designed to convert AC power from electrical outlets into the DC power required by compatible devices, such as the StarTech DK30CH2DPPD USB-C 4k Triple Monitor Docking Station. It serves as a reliable power source for operating your device or charging its battery, whether you are at home, in the office, or traveling.
The Kircuit AC/DC Adapter has been rigorously tested and validated to ensure compatibility and optimal performance with your device, providing stable and efficient power delivery.

Package Contents

- 1 x Kircuit AC/DC Adapter
- 2 x Power Cords



Image: The Kircuit AC/DC Adapter shown with one of the included power cords.

Setup Instructions

1. **Unpack the Adapter:** Carefully remove the AC/DC adapter and power cords from their packaging.
2. **Connect the Power Cord:** Insert one end of the provided power cord into the AC input port on the Kircuit AC/DC adapter. Ensure it is firmly seated.

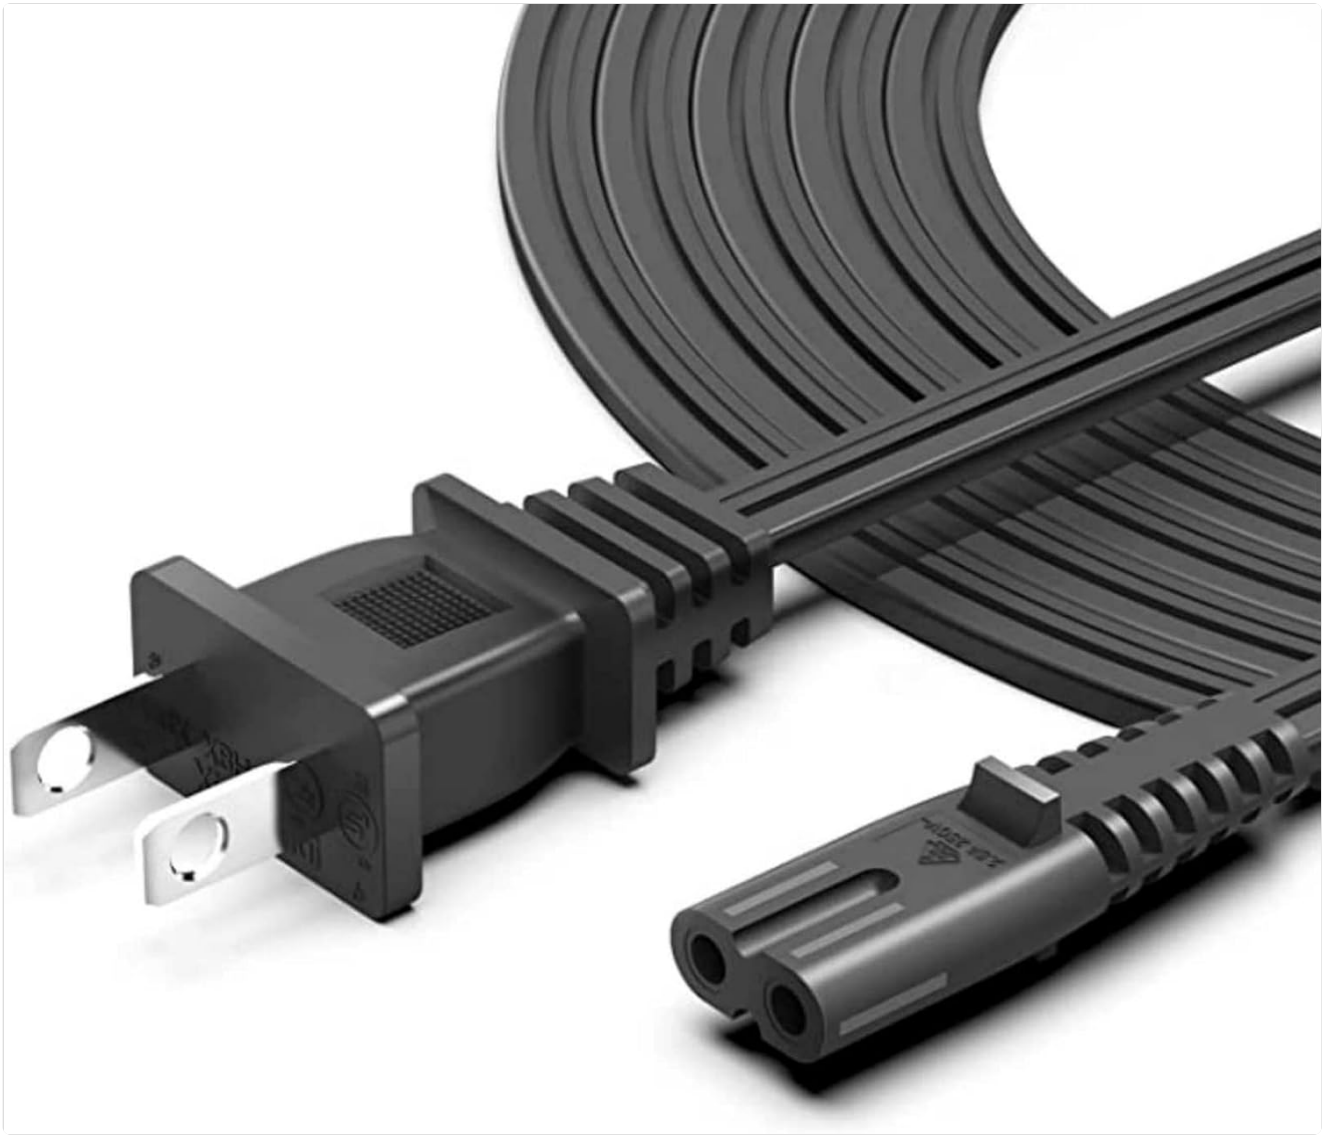


Image: Close-up view of the power cord's plug and the adapter's input port.

3. **Plug into Power Outlet:** Insert the other end of the power cord into a standard electrical wall outlet (100V-240V AC).



Image: The Kircuit AC/DC Adapter connected to a wall outlet, ready for use.

4. **Connect to Device:** Connect the DC output connector (barrel connector) from the Kircuit AC/DC adapter to the power input port of your compatible device, such as the StarTech DK30CH2DPPD docking station.
5. **Verify Connection:** Ensure all connections are secure before powering on your device. The adapter may have an indicator light to show it is receiving power.

Operating Instructions

Once properly connected, the Kircuit AC/DC Adapter will supply power to your compatible device. It is designed for continuous operation within its specified voltage range (100V-240V AC). The adapter features built-in dynamic IC, charger IC, and power fuse for rapid charging and protection against overcharge, ensuring safe and efficient power delivery. Simply plug the adapter into a live electrical outlet and connect it to your device. The adapter will automatically regulate the power output to meet your device's requirements.

Maintenance

- **Cleaning:** Disconnect the adapter from the power outlet and your device before cleaning. Use a soft, dry cloth to wipe the surface of the adapter. Do not use liquid cleaners or aerosols.

- **Storage:** When not in use, store the adapter in a cool, dry place away from direct sunlight and extreme temperatures. Avoid tightly coiling the cables to prevent damage.
- **Cable Care:** Regularly inspect the power cords and adapter cable for any signs of fraying, cuts, or damage. Do not use the adapter if any cables are damaged.
- **Ventilation:** Ensure the adapter is placed in a well-ventilated area during operation to prevent overheating. Do not cover the adapter.

Troubleshooting

Problem	Possible Cause	Solution
No power to device	◦ Adapter not plugged in ◦ Loose connection ◦ Faulty power outlet ◦ Damaged adapter/cable	◦ Ensure adapter is fully plugged into a live outlet. ◦ Check all cable connections for tightness. ◦ Test the outlet with another device. ◦ Inspect adapter and cables for damage; replace if necessary.
Adapter feels hot	◦ Normal operation (slight warmth) ◦ Poor ventilation ◦ Overload	◦ Ensure adequate airflow around the adapter. ◦ Verify the device's power requirements do not exceed the adapter's capacity. ◦ If excessively hot, disconnect immediately and contact support.
Device not charging/powering on	◦ Incorrect adapter for device ◦ Device issue	◦ Confirm the adapter's specifications match your device's power input requirements. ◦ Test your device with its original power supply if available.

Specifications

Feature	Detail
Brand	Kircuit
Input Voltage	100V-240V AC
Output Type	DC
Connector Type	DC Barrel Connector
Compatible Devices	StarTech DK30CH2DPPD USB-C 4k Triple Monitor Docking Station, and other compatible devices.
Special Feature	Travel-friendly design, Overcharge Protection
Manufacturer	Shenzhen Waweis Technology Co., Ltd
Date First Available	July 5, 2023

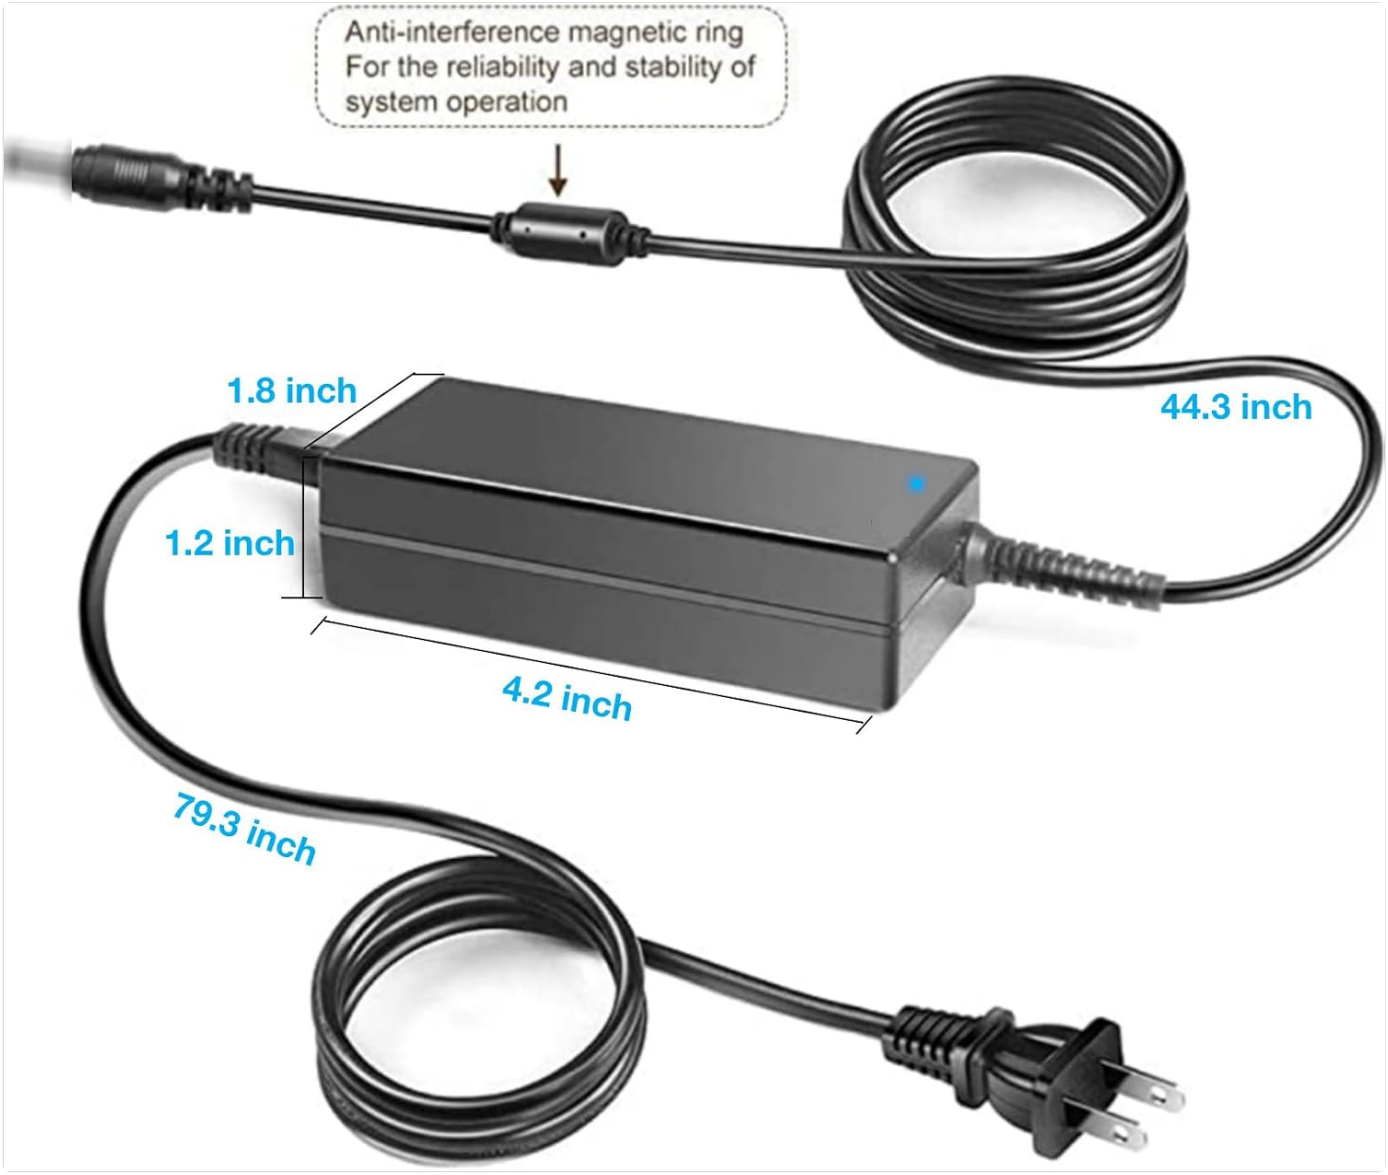


Image: Diagram showing the dimensions of the Kircuit AC/DC Adapter and the anti-interference magnetic ring on the cable.

Warranty and Support

For information regarding warranty coverage and product support, please refer to the documentation provided with your purchase or contact the seller directly. Extended protection plans may be available for purchase, offering additional coverage beyond the standard warranty period.
Typical protection plans include:

- 2-Year Protection Plan
- 3-Year Protection Plan
- Complete Protect (monthly renewal option)

For technical assistance or inquiries, please reach out to the manufacturer or authorized reseller.

© 2023 Kircuit. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CB61HQ2Q

More documents and user manuals: **https://manuals.plus/**