

brotect AirGlass Hybrid-Glass Screen Protector

BROTECT AirGlass Hybrid-Glass Screen Protector

INSTRUCTION MANUAL FOR MOTOCADDY M3 PRO ELECTRIC TROLLEY

1. INTRODUCTION AND PRODUCT OVERVIEW

The BROTECT AirGlass Hybrid-Glass Screen Protector is engineered to provide robust protection for the display of your Motocaddy M3 Pro Electric Trolley. Utilizing advanced AirGlass technology, this protector offers exceptional hardness while maintaining a thin, flexible profile. It is designed to safeguard your screen from scratches, dirt, and fingerprints, ensuring clarity and touch-screen responsiveness.



Image: BROTECT AirGlass Screen Protector packaging and the protector applied to a Motocaddy M3 Pro Electric Trolley screen.

2. PRODUCT FEATURES

- **Flexible Hybrid-Glass:** Combines the flexibility of film with the hardness of glass.
- **9H Extreme Hardness:** Provides strong resistance against scratches and impacts.
- **Ultra-Light and Thin:** 2x thinner and lighter than traditional tempered glass, ensuring minimal bulk.
- **High Transparency:** Maintains original screen clarity and vibrant colors.
- **Anti-Fingerprint Layer:** Reduces smudges and makes cleaning easier.
- **Bubble-Free Installation:** Optimized adhesive layer for smooth application.

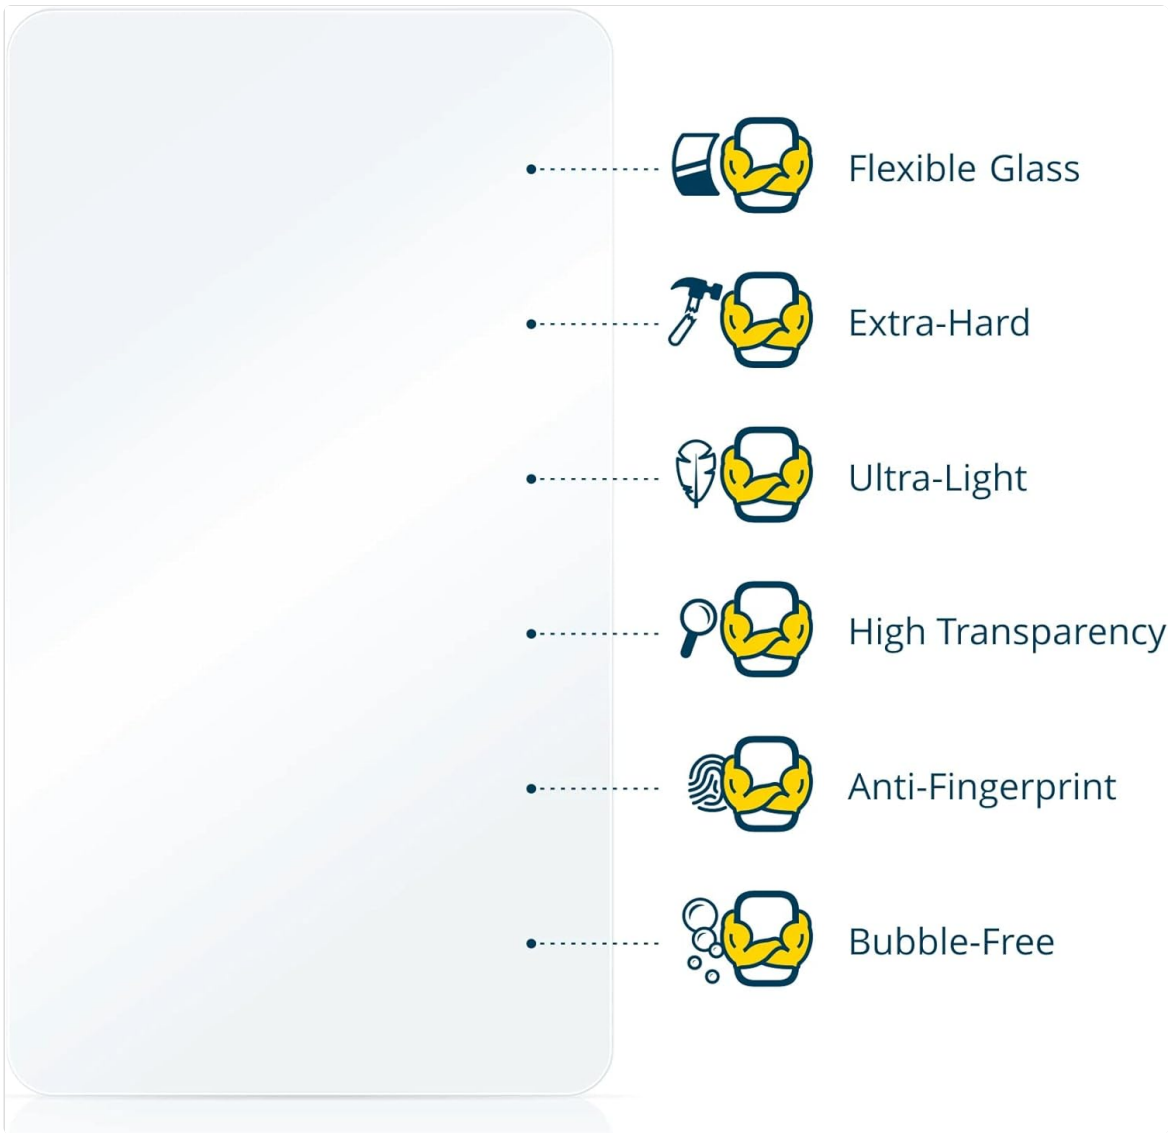


Image: Visual representation of key product features.



Image: The flexibility of the AirGlass screen protector.

3. SETUP AND INSTALLATION

Proper installation is crucial for optimal performance and longevity of your screen protector. Follow these steps carefully:

1. **Step 1: Prepare the Surface.** Locate a dust-free area (e.g., a bathroom). Thoroughly clean the device display to remove any dirt or dust. Ensure the screen is completely dry.
2. **Step 2: Position the Protector.** Carefully peel off half of the thin cover film from the screen protector. Align the screen protector precisely with one side of your device's display. Ensure it is centered and straight.
3. **Step 3: Apply and Smooth.** Cover a credit card with a soft cloth. Gently glide the covered credit card over the screen protector from one side to the other, pushing out any air bubbles. Simultaneously, slowly peel off the remaining half of the cover film as you smooth the protector onto the screen.
4. **Step 4: Finalize.** Smooth out any remaining air bubbles by gently pushing them towards the edges with the credit card. Small bubbles typically disappear within 24-48 hours.



Image: Step-by-step installation guide for the screen protector.



Image: Screen protectors positioned on the Motocaddy M3 Pro Electric Trolley display.

4. OPERATING AND DAILY USE

Once installed, the BROTECT AirGlass screen protector functions seamlessly with your Motocaddy M3 Pro Electric Trolley. It is designed to maintain the original touch sensitivity and display clarity, allowing for normal operation of your device. The anti-fingerprint coating helps keep your screen clean during daily use.

5. MAINTENANCE

To maintain the clarity and effectiveness of your screen protector, follow these simple cleaning guidelines:

- Use a soft, lint-free microfiber cloth to wipe the screen.
- For stubborn smudges, lightly dampen the cloth with water or a screen-safe cleaning solution. Avoid harsh chemicals or abrasive materials.
- Do not apply excessive pressure when cleaning, as this could potentially dislodge the protector or damage the underlying screen.

6. TROUBLESHOOTING

If you encounter any issues during or after installation, consider the following:

- **Bubbles:** Small bubbles are common immediately after installation. Most will dissipate within 24-48 hours. For larger bubbles, gently lift the nearest edge of the protector and re-apply, pushing the bubble out with a credit card wrapped in a soft cloth. Ensure no dust particles are trapped underneath.
- **Dust Particles:** If dust is trapped under the protector, carefully lift the nearest corner with a piece of tape. Use another piece of tape to dab and remove the dust particle from both the screen and the adhesive side of the protector. Re-apply carefully.
- **Misalignment:** If the protector is significantly misaligned, it may be necessary to carefully remove it and re-apply. Ensure the screen is clean before re-application.

7. SPECIFICATIONS

Attribute	Detail
Product Type	Hybrid-Glass Screen Protector
Material	Glass
Item Hardness	9H
Transparency	High-Transparency
Screen Surface	Glossy
Compatible Devices	Motocaddy M3 Pro Electric Trolley
Product Dimensions	7"L x 4"W (approximate)
Item Weight	0.662 ounces
Country of Origin	Germany

8. WARRANTY AND SUPPORT

BROTECT products are manufactured with care in Germany. The brand "BROTECT" is registered at the European trademark office with the register number: 013765094. Unauthorized commercial use of this brand by third parties is prohibited.

For any support inquiries or further assistance, please refer to the contact information provided with your purchase or visit the official BROTECT website.

BROTECT

Screen Protector



Instructions in various languages can be found inside.

 Anbringungsanleitung  Instructions

- 

1. Nutze zur Montage einen staubarmen Ort (z.B. Badezimmer) und reinige das Display gründlich von Staub und Verschmutzungen.

Before assembling, locate a dust free area (e.g. bathroom) and carefully remove any dust or dirt from the display.
- 

2. Löse das Trägermaterial zur Hälfte von der Displayschutzfolie ab und setze die Displayschutzfolie an einer Seite auf dem Display an. Die Displayschutzfolie sollte in aufgezogenem Zustand mittig auf dem Display ausgerichtet sein.

Remove half of the thin cover film of the screen protector and align the screen protector on one side with your screen. Make sure that the screen protector will be centered on the middle of your screen.
- 

3. Streiche die Displayschutzfolie leicht mittels einer mit einem weichen Tuch umwickelten Kreditkarte von einer Seite zur anderen auf das Display. Ziehe dabei gleichzeitig den Rest des Trägermaterials ab.

Cover a credit card with a soft cloth and carefully slide over the screen protector from one side to the other on your screen, enabling you to remove the rest of the thin cover film.
- 

4. Eventuell vorhandene Luftbläschen herausstreichen - fertig!

Smooth out any remaining air bubbles with your credit card. It's that easy!

