

## Wokyo B0CBV2FW3Q

# Wokyo 5.9 Inch Portable Air Conditioner Exhaust Hose Coupler Instruction Manual

Model: B0CBV2FW3Q

## 1. PRODUCT OVERVIEW

The Wokyo 5.9 Inch Portable Air Conditioner Exhaust Hose Coupler is designed to extend your air conditioner's exhaust hose, facilitating the efficient removal of hot air through a window or wall opening. This accessory ensures a proper seal, preventing hot air from re-entering the room and contributing to effective cooling.

Constructed from durable ABS plastic, this coupler is built for long-term use and is compatible with most portable air conditioner exhaust hoses that have a 5.9-inch diameter. Its thoughtful design allows for easy connection by twisting either clockwise or counter-clockwise.



Image 1.1: The Wokyo 5.9 Inch Portable Air Conditioner Exhaust Hose Coupler, showcasing its design and material.

## 2. PACKAGE CONTENTS

---

Verify that all items are present in the package:

- 1 x Wokyo 5.9 Inch Portable Air Conditioner Exhaust Hose Coupler

## 3. SETUP INSTRUCTIONS

---

Follow these steps to properly install the exhaust hose coupler:

1. **Prepare the Exhaust Hose:** Ensure your portable air conditioner's exhaust hose has a 5.9-inch (approximately 150mm) diameter.
2. **Connect to Exhaust Hose:** Take the Wokyo exhaust hose coupler. Align the threaded end of the coupler with the exhaust hose. Twist the hose onto the coupler. The universal thread design allows for connection by twisting either clockwise or counter-clockwise until secure. No tools are required for this step.



Image 3.1: Illustrates the connection of the exhaust hose to the coupler.

- 3. Attach to Air Conditioner Exhaust Port:** Once the hose is securely attached to the coupler, connect the flat, rectangular end of the coupler to the exhaust port at the back of your portable air conditioner. This connection should snap into place or slide in firmly.



Image 3.2: Shows the coupler connected to the back exhaust port of a portable air conditioner.

4. **Position the Exhaust:** Direct the exhaust hose, now extended with the coupler, through a window or wall opening. Ensure the connection points are sealed to prevent hot air from re-entering the room.



Image 3.3: The coupler and hose are positioned to direct hot air out through a window.

## 4. OPERATING GUIDELINES

---

The exhaust hose coupler is a passive component. Proper operation involves ensuring a secure and sealed connection to maximize your air conditioner's efficiency.

- **Check Connections:** Regularly inspect the connections between the air conditioner, the coupler, and the exhaust hose to ensure they remain tight and free of gaps.
- **Maintain Seal:** Verify that the window or wall opening where the exhaust hose exits is properly sealed. This prevents hot outdoor air from entering and cool indoor air from escaping, optimizing cooling performance and reducing energy consumption.
- **Avoid Kinks:** Ensure the exhaust hose is not kinked or bent sharply, as this can restrict airflow and reduce the efficiency of your air conditioner.

## 5. MAINTENANCE

---

To ensure the longevity and optimal performance of your exhaust hose coupler, follow these simple maintenance guidelines:

- **Cleaning:** Wipe the coupler with a soft, damp cloth to remove dust and debris. Avoid using abrasive cleaners or solvents, as these can damage the ABS plastic material.

- **Storage:** When not in use, store the coupler in a cool, dry place away from direct sunlight and extreme temperatures to prevent material degradation.
- **Inspection:** Periodically check the coupler for any signs of cracks, damage, or wear. Replace the coupler if any significant damage is observed to maintain an effective seal.

## 6. TROUBLESHOOTING

If you encounter issues with your exhaust hose coupler, consider the following:

- **Loose Connection:** If hot air is leaking from the connection points, ensure the exhaust hose is twisted firmly onto the coupler and the coupler is securely attached to the air conditioner's exhaust port.
- **Improper Fit:** Verify that your air conditioner's exhaust hose has a 5.9-inch diameter. This coupler is designed for that specific size. If the hose diameter is different, the coupler may not fit correctly.
- **Reduced Airflow:** Check the exhaust hose for any kinks or blockages that might be impeding airflow. Straighten the hose if necessary.
- **Damaged Coupler:** If the coupler is cracked or broken, it will not provide an effective seal. Replace the coupler if it is damaged.

## 7. SPECIFICATIONS

Feature	Specification
Brand	Wokyo
Model Number	B0CBV2FW3Q
Material	ABS plastic
Color	White
Product Dimensions (L x W x H)	7 x 5.83 x 2.68 inches (17.8 x 14.8 x 6.8 cm)
Item Weight	0.22 Pounds (100 g)
Hose Diameter Compatibility	5.9 inches (150mm)

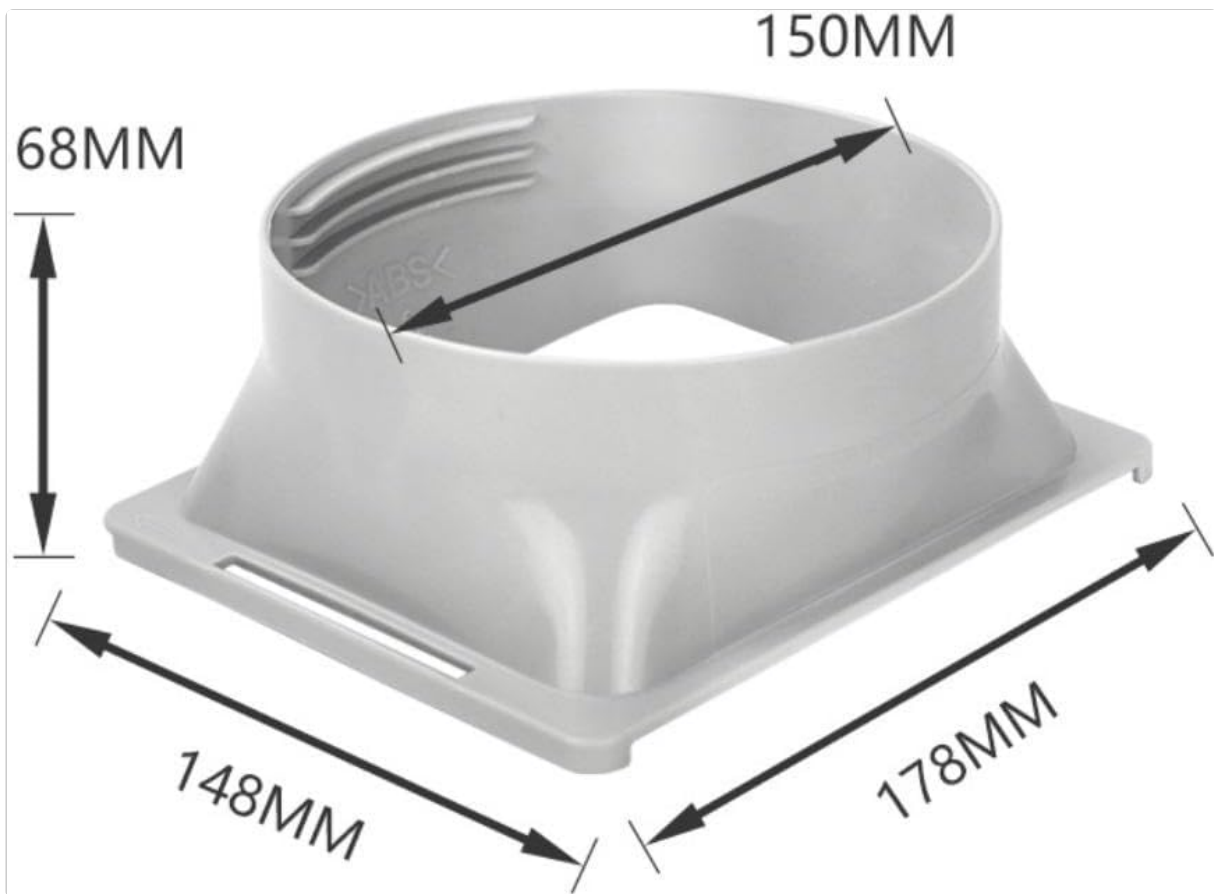


Image 7.1: Dimensional diagram of the Wokyo exhaust hose coupler.

## 8. WARRANTY AND SUPPORT

Specific warranty information for this product is not provided in the available documentation. For any product-related inquiries, technical support, or warranty claims, please contact the seller directly through your purchase platform or refer to the Wokyo brand store for general support information.

You can visit the Wokyo Store at: [Wokyo Store on Amazon](#)