Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Sxkxm Z1200

Sxkxm Z1200 Neo-Seal Closet Gasket Kit Instruction Manual

Model: Z1200

Product Overview

The Sxkxm Z1200 Neo-Seal Closet Gasket is designed to create a secure and odor-proof seal between the toilet outlet and the sewer inlet for wall-hung and rear-flush toilets. This ensures proper sewage flow and prevents the escape of unpleasant odors.



Image: The Sxkxm Z1200 Neo-Seal Closet Gasket, a black circular gasket.

Material and Design

This wall-hung toilet gasket is constructed from closed-cell Neoprene, a material known for its resistance to water, petroleum products, and various chemicals. It offers excellent resiliency and resistance to rotting, ensuring long-lasting performance.

The 4-inch neo-seal closet gasket features dual-sided peel-and-stick adhesive backing. This dual-sided design provides flexibility during application, allowing it to conform well to different surfaces and angles, which simplifies the installation process.



Image: A hand peeling off the protective film from the adhesive backing of the gasket, demonstrating its dual-sided adhesive feature.

Specifications

Model Number	Z1200
Brand	Sxkxm
Material	Closed-Cell Neoprene
Product Dimensions	3.9 x 3.9 x 0.7 inches
Item Thickness	0.72 Inches
Item Weight	0.88 ounces
Color	Black

UPC	747783932370



Image: A visual representation of the gasket's dimensions, indicating a diameter of approximately 5.33 inches and a thickness of 0.72 inches.

Installation Guide

The installation process for the Z1200 Neo-Seal Closet Gasket is designed for convenience. Follow these steps carefully to ensure a proper and secure seal.

1. **Prepare the Fixture:** Wipe the gasket recess of the toilet fixture clean with a dry cloth. Remove and discard the inner foam circle from the NEO-SEAL gasket.
2. **Apply First Adhesive Side:** Using a fingernail or utility knife blade, carefully lift and remove the adhesive backing off one side of the NEO-SEAL gasket.
3. **Secure Gasket to Fixture:** Press the adhesive-coated side of the NEO-SEAL gasket firmly into the gasket recess in the fixture. Ensure it bottoms out in the groove and that contact between the adhesive and the fixture is

maintained.

4. **Prepare Coupling:** Wipe the lip of the coupling clean and dry.
5. **Apply Second Adhesive Side:** Remove the adhesive backing off the other side of the NEO-SEAL gasket.
6. **Position Toilet:** Place the toilet in position over the adjustable coupling without delay. The coupling should extend beyond the finished wall far enough to compress the NEO-SEAL gasket effectively.

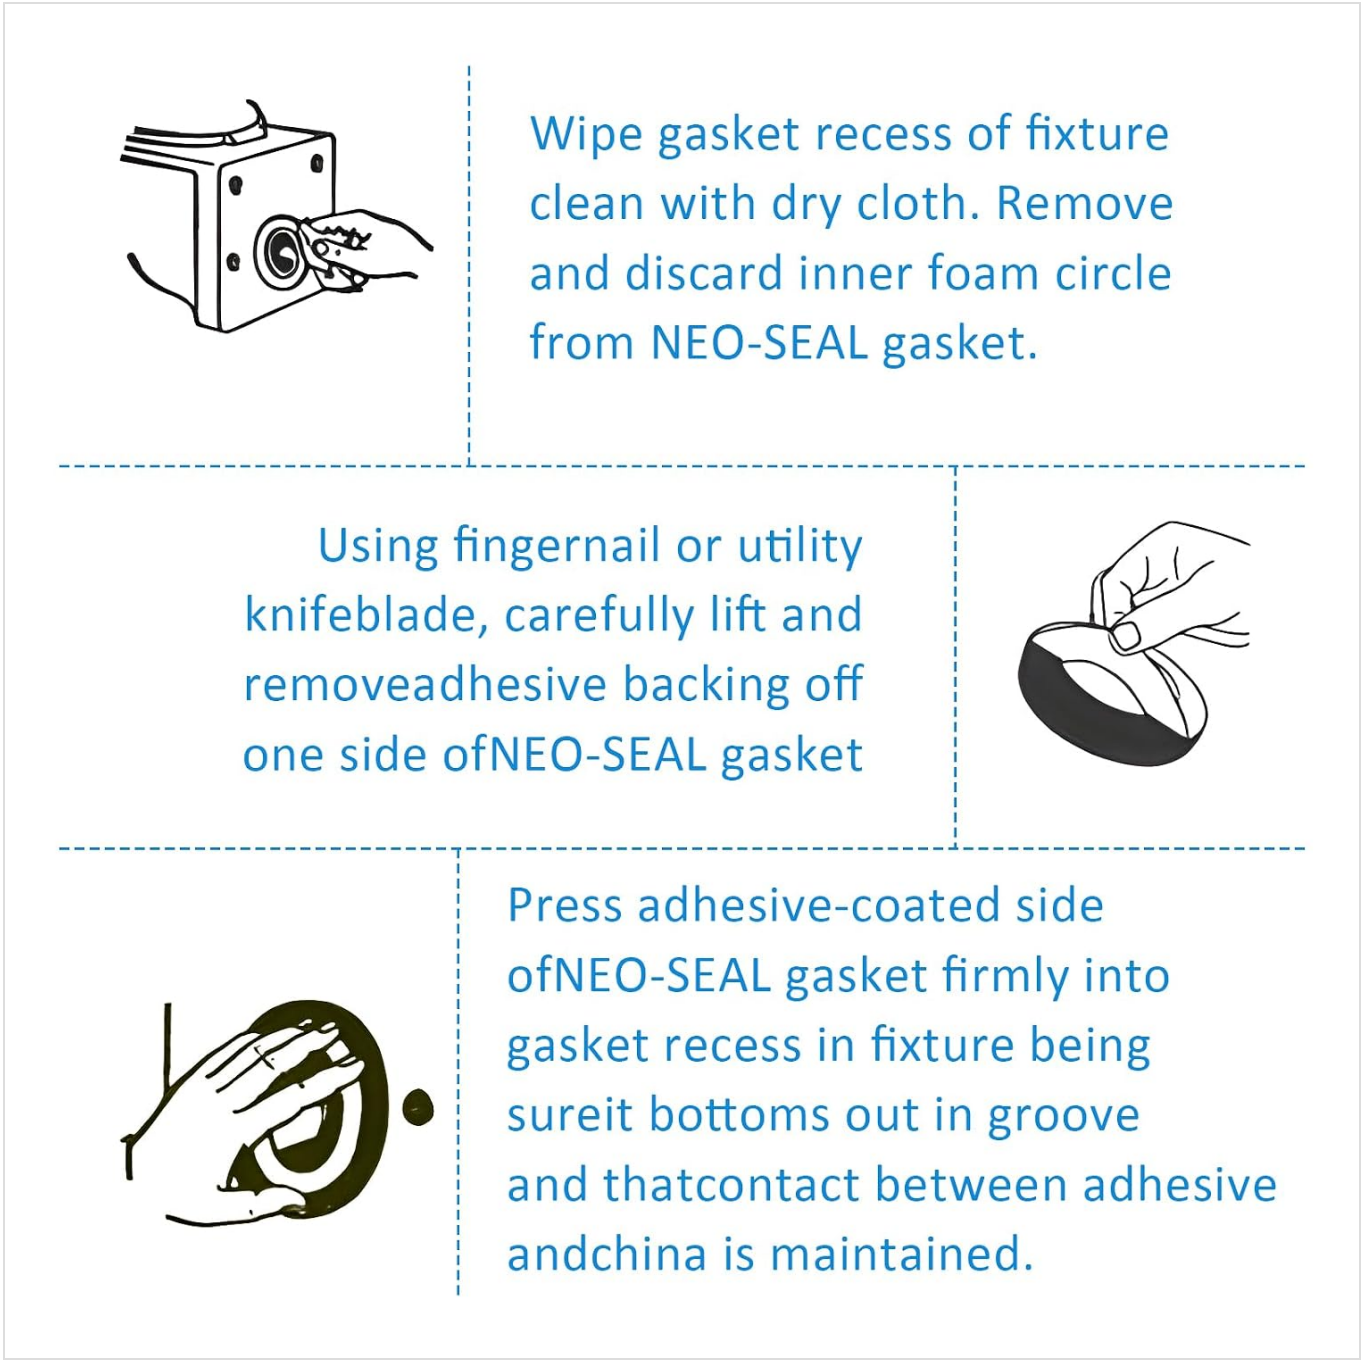

Image: Diagram illustrating the first three steps of gasket installation: cleaning the recess, removing one adhesive backing, and pressing the gasket into the fixture.

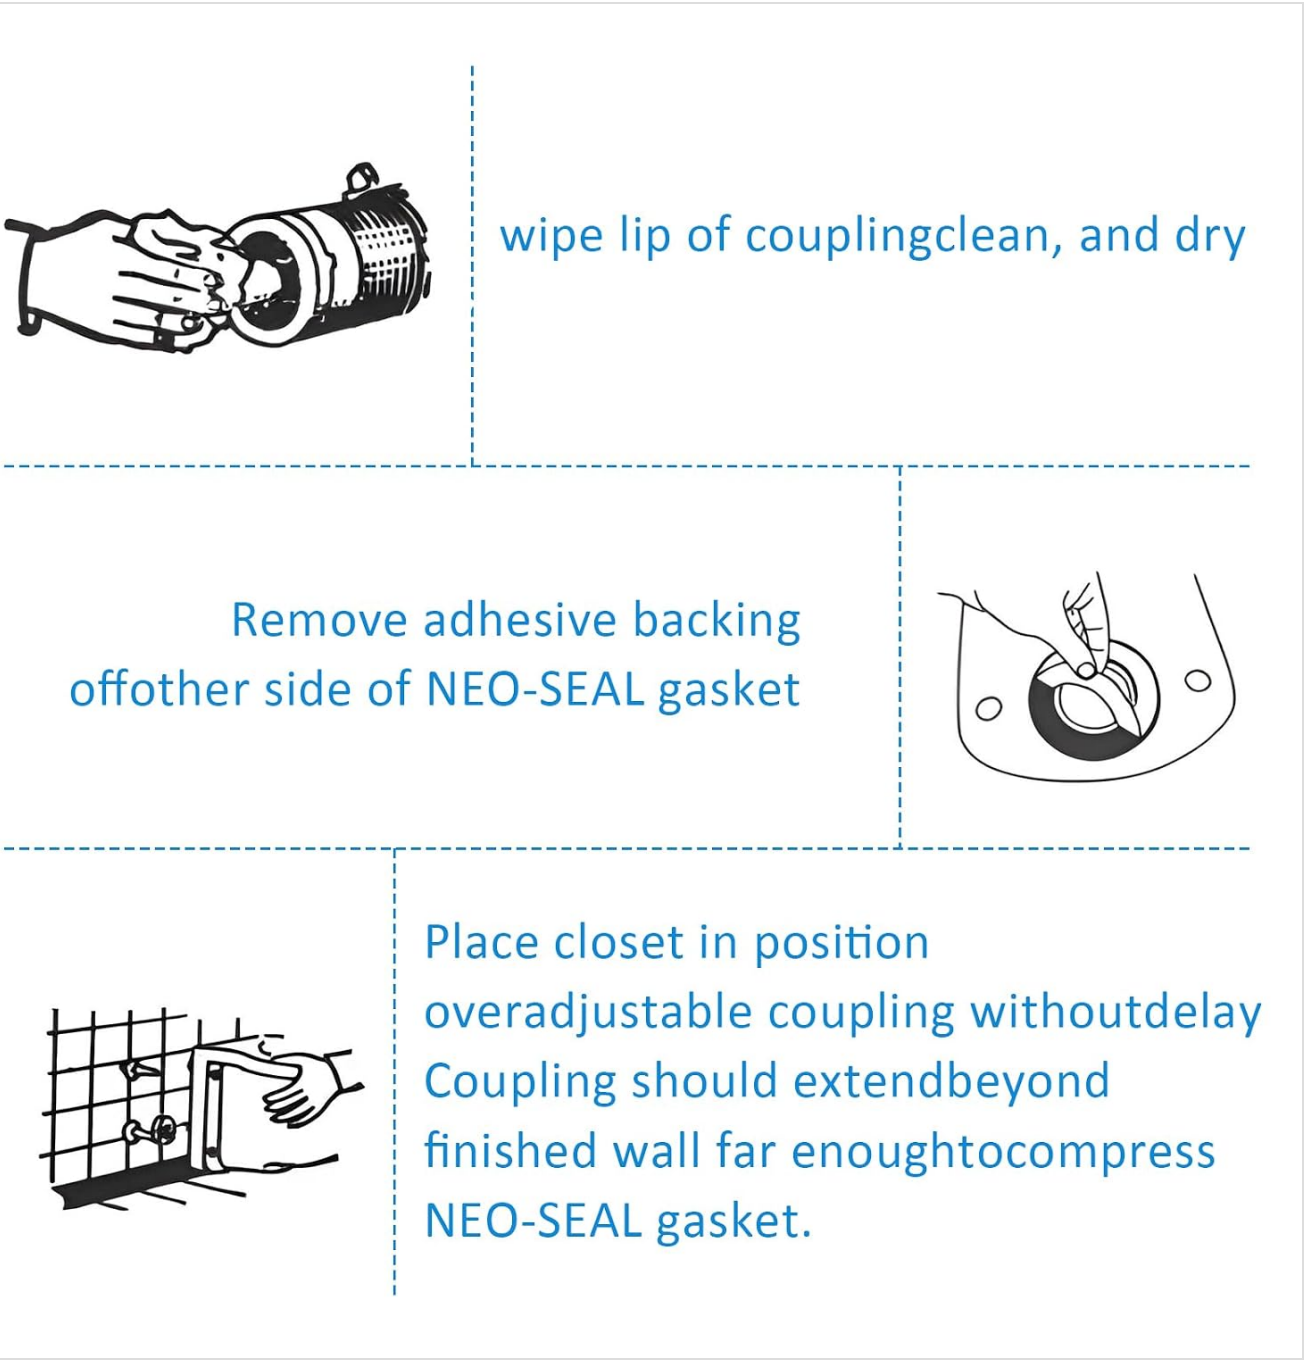

Image: Diagram illustrating the final three steps of gasket installation: cleaning the coupling, removing the second adhesive backing, and positioning the toilet to compress the gasket.

Maintenance

Once properly installed, the Sxkxm Z1200 Neo-Seal Closet Gasket is designed to be maintenance-free. Its durable closed-cell Neoprene material resists degradation from water and common chemicals found in plumbing systems. Regular inspection of the toilet for any signs of leaks around the seal is recommended, especially after initial installation.

Troubleshooting

- **Leakage After Installation:** If leaks occur, ensure that the gasket was fully compressed by the toilet against the coupling. Insufficient compression can prevent a proper seal. Verify that both surfaces (fixture recess and coupling lip) were clean and dry before applying the gasket.
- **Gasket Not Sealing:** Ensure the gasket material is pliable and not hardened. While designed for durability, extreme conditions or improper storage might affect its flexibility. A properly installed gasket should create a tight seal.

- **Odor Issues:** If odors persist, re-check the installation to ensure the gasket is fully seated and compressed, creating an airtight barrier. Odors typically indicate a breach in the seal.

Customer Support

For any questions regarding the Sxkxm Z1200 Neo-Seal Closet Gasket, including product quality, model compatibility, size, returns, exchanges, or refunds, please do not hesitate to contact Sxkxm customer service. We are committed to resolving any issues as quickly as possible.

You can visit the official Sxkxm store on Amazon for more information and support:Sxkxm Store

© 2023 Sxkxm. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CCRGHHQV

More documents and user manuals: **https://manuals.plus/**