

[Manuals.plus](#) /

> [GIMILI](#) /

> GIMILI Commercial Dual-Spout Kitchen Sink Faucet (GM1002-33N-LED) User Manual

GIMILI GM1002-33N-LED

GIMILI Commercial Dual-Spout Kitchen Sink Faucet

Model: GM1002-33N-LED (Brushed Nickel)

1. INTRODUCTION

Thank you for choosing the GIMILI Commercial Dual-Spout Kitchen Sink Faucet. This manual provides essential information for the safe installation, operation, and maintenance of your new faucet. Please read it thoroughly before installation and keep it for future reference.

2. SAFETY INFORMATION

- Always turn off the main water supply before attempting any installation or maintenance.
- Wear appropriate personal protective equipment, such as safety glasses, during installation.
- If you are unsure about any part of the installation process, consult a qualified plumber.
- The LED light is water-powered and does not require batteries. If an LED failure occurs, replacement services are available.

3. PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- GIMILI Dual-Spout Kitchen Faucet Assembly
- Deck Plate
- Handle
- Pull-Down Sprayer
- Hot and Cold Water Supply Hoses (27.5" with 3/8" female compression threads)
- Installation Hardware (mounting nuts, screws, stainless steel rings)
- Instruction Manual
- Soap Dispenser

4. PRODUCT SPECIFICATIONS

Feature	Specification
Brand	GIMILI
Model Name	GM1002-33N-LED
Color	Brushed Nickel
Material	Stainless Steel
Mounting Type	Deck Mount
Number of Handles	2 (one for temperature, one for sprayer lock)
Hole Count	1
Flow Rate	1.83 Gallons Per Minute
Spout Height	6.8 Inches
Spout Reach	8 Inches
Mounting Hole Diameter	1.4 Inches
Special Features	360° Swivel, Dual Spout, LED Aerator, Pull Down Sprayer



Figure 1: Detailed dimensions of the GIMILI Dual-Spout Kitchen Faucet. Note the 22.4" overall height.

5. SETUP AND INSTALLATION

The GIMILI faucet is designed for easy installation, typically completed within 20 minutes without the need for a professional plumber. Ensure you have adequate vertical clearance for the faucet's height (22.4 inches) before installation.

5.1 Pre-Installation Checks

- Confirm all package contents are present.
- Ensure your sink has a compatible single hole or use the included deck plate for sinks with multiple holes.
- Turn off the water supply to your kitchen sink.

5.2 Installation Steps

1. Insert the faucet into the sink hole. If your sink has multiple holes, use the provided deck plate to cover unused holes.
2. Secure the faucet from underneath the sink using the provided mounting hardware (stainless steel rings, nuts,

and screws).

3. Connect the hot and cold water supply hoses to your water lines. The hoses are 27.5 inches long with 3/8" female compression threads.
4. Connect the pull-down sprayer hose to the main faucet body.
5. Install the handle and soap dispenser as per the detailed instruction manual included in the package.

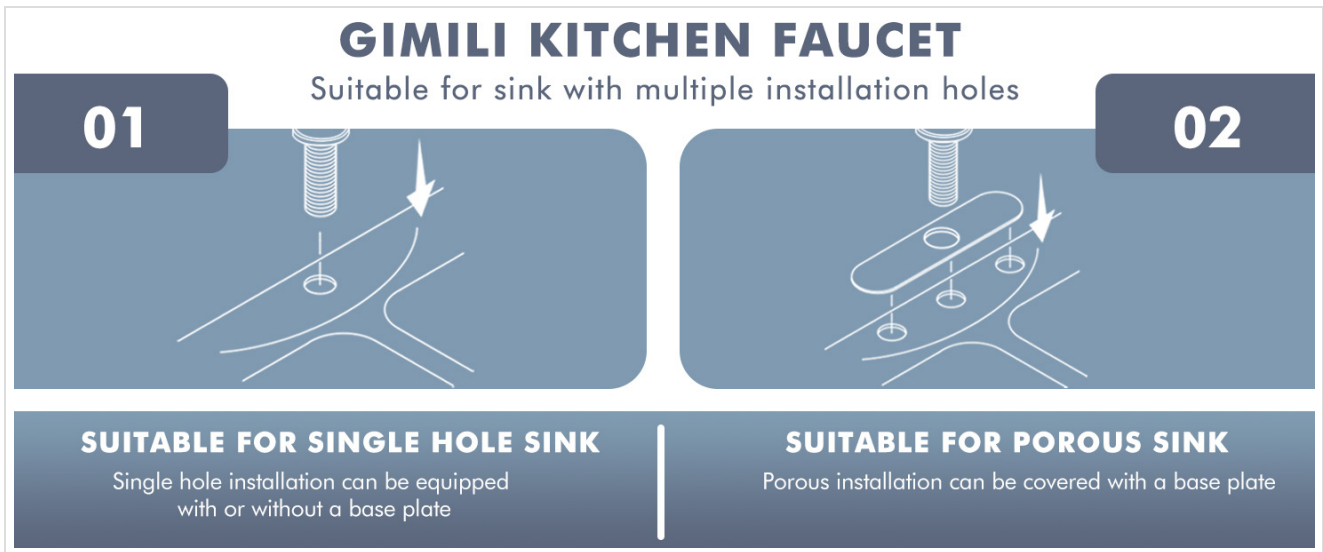


Figure 2: Illustration of installation suitability for single-hole and porous sinks.

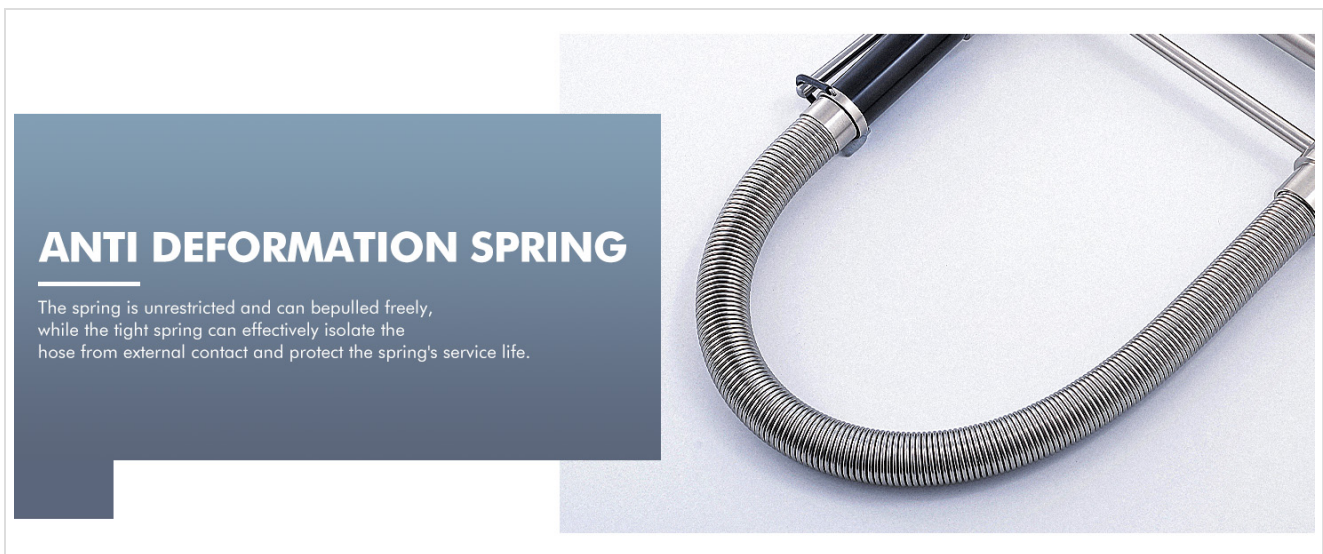


Figure 3: Close-up of the metal installation bracket for secure countertop mounting.

6. OPERATING INSTRUCTIONS

6.1 Water Flow Control

The faucet features a single lever handle to control both water temperature and flow. Move the handle left for hot water and right for cold water. Push the handle up to increase flow and down to decrease or stop flow.

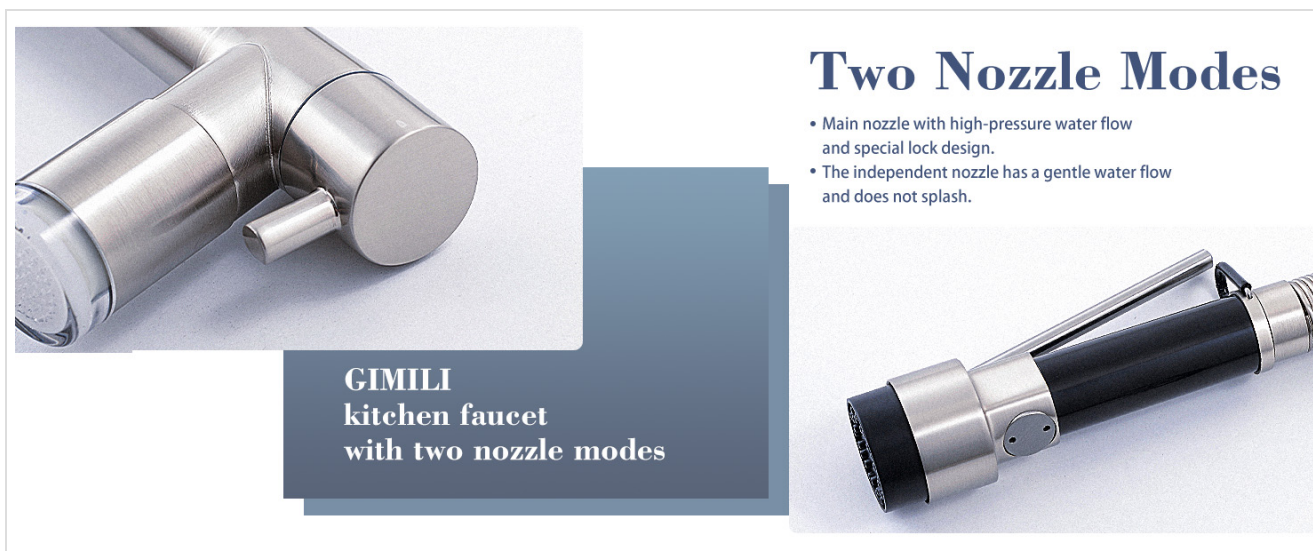


Figure 4: The single lever handle controls both hot and cold water flow.

6.2 Dual Nozzle Modes

This faucet is equipped with two distinct nozzles for versatile use:

- **Main Nozzle (Pull-Down Sprayer):** Delivers a powerful, high-pressure spray suitable for cleaning dishes and rinsing the sink. It features a unique lock buckle design, allowing you to press lightly to lock the spray mode for continuous water flow without holding the lever.
- **Independent Nozzle:** Provides a mild, aerated water flow, ideal for tasks like filling pots or washing delicate items. This nozzle also features an LED temperature indicator.

FAUCET WITH TWO NOZZLE MODES



Figure 5: The faucet offers two distinct water delivery modes: a high-pressure spray from the pull-down nozzle and a gentle stream from the independent nozzle.



Figure 6: Close-up view illustrating the two nozzle modes of the GIMILI kitchen faucet.

6.3 LED Temperature Indicator

The independent nozzle is equipped with a water-powered LED light that changes color based on water temperature, providing a visual safety cue:

- **Blue:** Cold water (0-85°F)
- **Green:** Warm water (85-105°F)
- **Red:** Hot water (>105°F)



Figure 7: The LED light on the independent nozzle changes color to indicate water temperature.

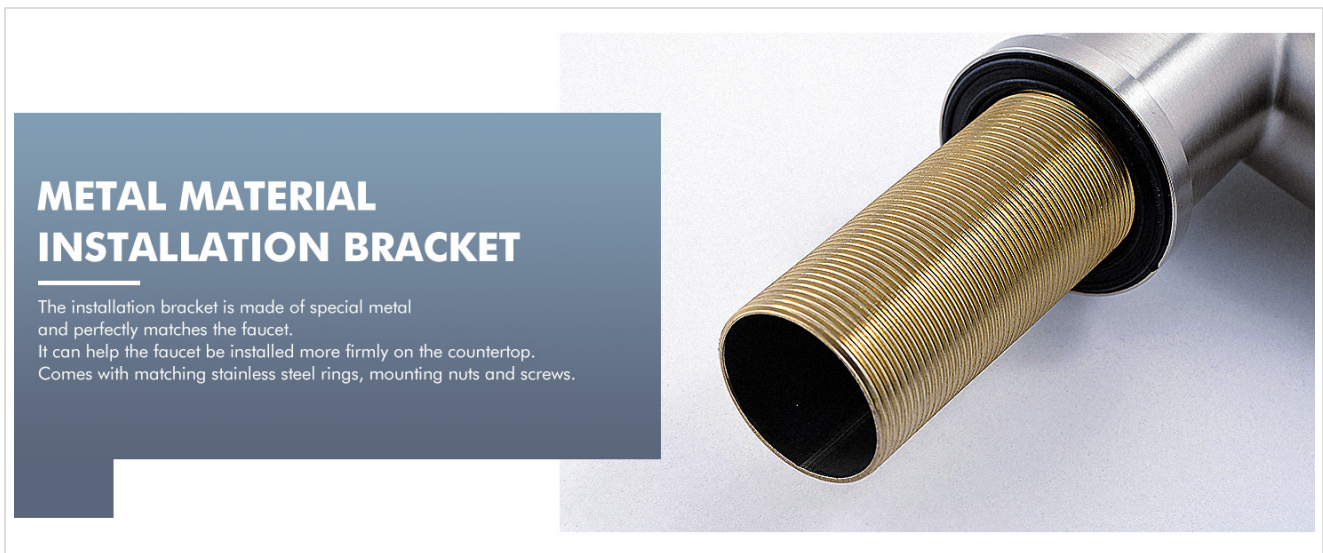


Figure 8: Visual representation of the LED color changes based on water temperature.

6.4 Flexible Design

The pull-down sprayer features a tight spring design, allowing it to be pulled freely and offering a wide range of motion. Both the main faucet body and the independent nozzle can swivel 360 degrees, providing flexibility for various kitchen tasks.

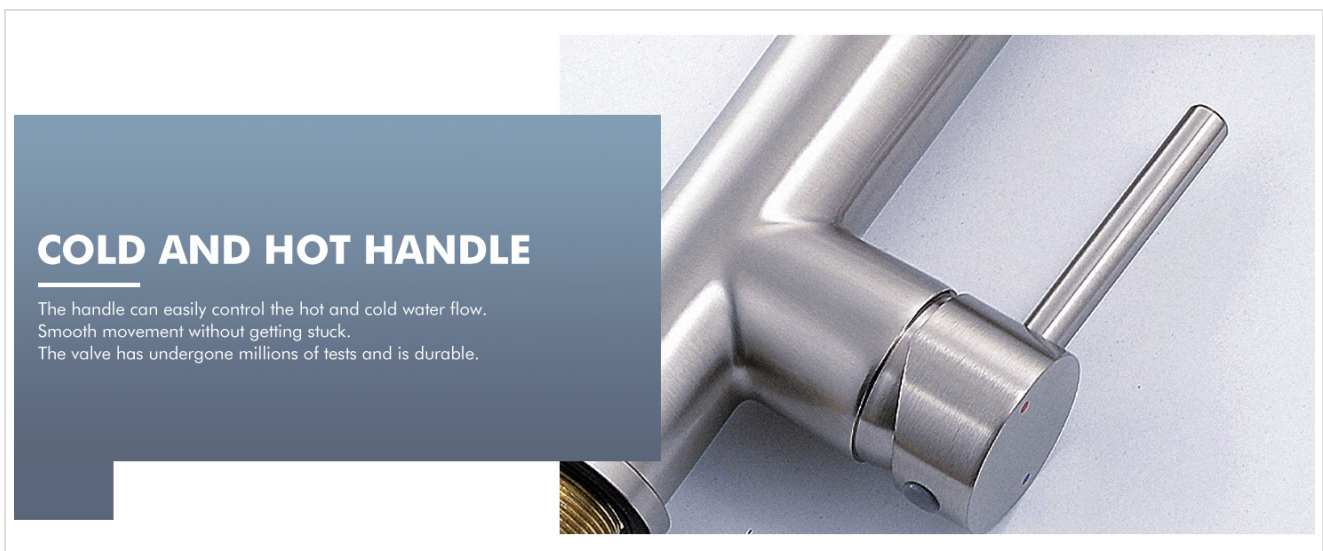


Figure 9: The anti-deformation spring ensures durability and flexible movement of the pull-down sprayer.

6.5 Product Video

Your browser does not support the video tag.

Video 1: Official GIMILI demonstration of the Commercial Kitchen Faucet in Brushed Nickel, showcasing its features and operation.

7. MAINTENANCE

To maintain the appearance and functionality of your GIMILI faucet, simply wipe it with a soft cloth. Avoid using abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish.

8. TROUBLESHOOTING

8.1 Low Water Pressure

If you experience low water pressure, check the following:

- Ensure the main water supply valve is fully open.
- Check for kinks or obstructions in the supply hoses.
- Clean the aerator on both nozzles. Mineral deposits can restrict water flow.

8.2 LED Light Malfunction

The LED light is water-powered. If it stops working:

- Ensure sufficient water flow to power the LED.
- If the issue persists, contact GIMILI customer support for replacement services.

9. WARRANTY INFORMATION

The GIMILI Commercial Dual-Spout Kitchen Sink Faucet comes with a limited warranty. For specific terms and conditions, please refer to the warranty documentation included with your product or contact GIMILI customer support.

10. CUSTOMER SUPPORT

For any questions, technical assistance, or warranty claims, please contact GIMILI Sanitary Ware. You can find their contact information by clicking on "GIMILI Sanitary Ware" at the bottom of the product details page on the Amazon platform. They are committed to providing support and assistance.



Figure 10: Information on how to access online support for GIMILI products.