

Capello CR22

Capello CR22 Sleep and Charge Dual Alarm Clock User Manual

Model: CR22

1. INTRODUCTION

Thank you for purchasing the Capello CR22 Sleep and Charge Dual Alarm Clock. This device combines a digital alarm clock with dual USB charging ports, allowing you to charge your mobile devices conveniently while you sleep. Please read this manual thoroughly before operating the unit and retain it for future reference.

2. PACKAGE CONTENTS

- Capello CR22 Sleep and Charge Dual Alarm Clock
- AC Power Adapter
- User Manual

Note: USB charging cables are not included.

3. PRODUCT FEATURES

- Dual USB Charger: Two USB ports to charge two phones or devices simultaneously.
- Large Display: Highly readable 1.2" white LED display with variable dimmer settings.
- Nap and Sleep Timer: Set a sleep timer for music (15/30/60/90 minutes) or a nap timer.
- Digital AM/FM Radio: Listen to radio with clear digital tuning and save up to 10 favorite stations.
- Dual Alarm Clock: Set two independent alarms for different wake-up times.
- Line-in Jack: Play music from any device with a 3.5mm headphone jack.
- Battery Backup: Time and alarm settings are saved during power outage (AAA batteries not included).



Figure 3.1: Capello CR22 Sleep and Charge Dual Alarm Clock retail packaging. The box highlights features such as dual USB charging, large time display, and AM/FM radio.



Figure 3.2: Side view of the Capello CR22 retail box, detailing key features like dual USB charger, large display, nap/sleep timer, digital AM/FM radio, dual alarm, line-in jack, and battery backup.



Figure 3.3: Close-up of the "Charge Two Phones" icon on the Capello CR22 box, emphasizing its dual USB charging capability.



Figure 3.4: Close-up of icons on the Capello CR22 box, highlighting "Dual USB Charging" and "Large Time Display" features.

4. SETUP

4.1 Power Connection

1. Unpack the Capello CR22 alarm clock and its AC power adapter.
2. Insert the small end of the AC power adapter into the DC IN jack located on the back of the alarm clock.
3. Plug the other end of the AC power adapter into a standard wall outlet (AC 120V, 60Hz). The display will light up.

4.2 Battery Backup Installation (Optional)

For battery backup functionality during power outages, install 2 AAA batteries (not included).

1. Locate the battery compartment on the bottom of the unit.
2. Open the battery compartment cover.
3. Insert 2 new AAA batteries, observing the correct polarity (+ and -) as indicated inside the compartment.
4. Replace the battery compartment cover.

The battery backup will maintain time and alarm settings during a power interruption, but the display will not be illuminated.

5. OPERATING INSTRUCTIONS

5.1 Setting the Time

1. Press and hold the **TIME SET** button (often represented by a clock icon) located on the top panel until the hour digits begin to flash.
2. Press the + or - buttons to adjust the hour. Pay attention to the AM/PM indicator.
3. Press the **TIME SET** button again to confirm the hour and move to the minute setting. The minute digits will flash.
4. Press the + or - buttons to adjust the minutes.
5. Press the **TIME SET** button one more time to save the time and exit time setting mode.

5.2 Setting Alarms (Alarm 1 and Alarm 2)

The CR22 allows for two independent alarms.

1. Press and hold the **ALARM 1** button (bell icon with '1') until the alarm hour digits flash.
2. Use the + or - buttons to set the desired alarm hour.
3. Press the **ALARM 1** button again to confirm the hour and move to the minute setting.
4. Use the + or - buttons to set the desired alarm minutes.
5. Press the **ALARM 1** button again to select the alarm source (Buzzer, FM Radio, or AM Radio).
6. Press the **ALARM 1** button one more time to save the alarm setting. An alarm icon will appear on the display.
7. Repeat the process for **ALARM 2** using the **ALARM 2** button (bell icon with '2').

5.3 Snooze Function

When the alarm sounds, press the large **SNOOZE** button on the top of the unit. The alarm will temporarily stop and sound again after approximately 9 minutes.

5.4 Turning Off the Alarm

To turn off the alarm completely for the day, press the corresponding **ALARM 1** or **ALARM 2** button once while the alarm is sounding. The alarm icon will disappear from the display.

5.5 Radio Operation (AM/FM)

1. Press the **RADIO ON/OFF** button to turn on the radio.
2. Press the **BAND** button to switch between FM and AM bands.
3. Press the **TUNE +** or **TUNE -** buttons to manually tune to a station. Press and hold to auto-scan for the next available station.
4. To save a preset station, press and hold the **PRESET** button until the preset number flashes. Use **+** or **-** to select a preset number, then press **PRESET** again to save.
5. To recall a preset station, press the **PRESET** button repeatedly to cycle through saved stations.
6. Adjust volume using the **VOLUME +** or **VOLUME -** buttons.

5.6 USB Charging

The Capello CR22 features two USB charging ports on the front of the unit.

1. Connect your device's USB charging cable (not included) to one of the USB ports on the alarm clock.
2. Connect the other end of the cable to your smartphone, tablet, or other USB-powered device.
3. Charging will begin automatically.

Note: Charging speed may vary depending on the device and cable used. These ports are for charging only and do not support data transfer.

5.7 Display Dimmer

Press the **DIMMER** button (sun icon) on the top panel to cycle through different brightness levels for the display, including off.

6. MAINTENANCE

- **Cleaning:** Wipe the unit with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Placement:** Place the unit on a stable, flat surface away from direct sunlight, heat sources, and excessive moisture.
- **Battery Replacement:** If using battery backup, replace AAA batteries annually or when the display shows signs of dimming during a power outage.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
No display/Unit not turning on.	Power adapter not connected or faulty outlet.	Ensure AC adapter is securely plugged into the unit and a working wall outlet. Try a different outlet.
Alarm does not sound.	Alarm not set, alarm volume too low, or alarm turned off.	Verify alarm time is set correctly and alarm icon is visible. Increase alarm volume. Ensure alarm is not turned off for the day.
Poor radio reception.	Antenna not extended or interference.	Fully extend the FM wire antenna. For AM, try repositioning the unit. Keep away from other electronic devices.
USB charging not working.	Cable issue, device not compatible, or unit not powered.	Ensure the alarm clock is powered on. Try a different USB cable or device. Some high-power devices may charge slower or not at all.

8. SPECIFICATIONS



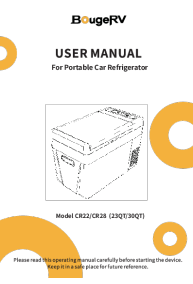
- **Model:** CR22


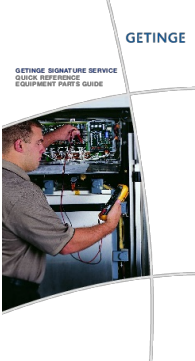

- **Power Source:** AC 120V, 60Hz
- **Battery Backup:** 2 x AAA batteries (not included)
- **Display Type:** Digital LED
- **Radio Frequencies:** FM, AM
- **USB Charging Ports:** 2 (for charging only)
- **Dimensions:** Approximately 4.6"W x 7.7"H
- **Weight:** Approximately 7.2 ounces
- **Material:** Plastic

9. WARRANTY AND SUPPORT

Capello products are designed for reliability and performance. For warranty information or technical support, please refer to the contact details provided on the product packaging or visit the official Capello website. Please have your model number (CR22) and purchase date available when contacting support.

Related Documents - CR22

	Capello Sound Round CA-47 User Guide: Alarm Clock, Sound Machine & Bluetooth Speaker Comprehensive user guide for the Capello Sound Round CA-47, detailing setup, alarm functions, sound machine, Bluetooth speaker, sleep timer, troubleshooting, and product care.
	Capello Power Tray CA-55W User Guide: Alarm Clock, Wireless Charger, Nightlight Comprehensive user guide for the Capello Power Tray (CA-55W), detailing setup, time setting, alarm functions, ambient nightlight, Qi wireless charging, USB-C charging, troubleshooting, product care, and warranty information.
	BougeRV Portable Car Refrigerator User Manual CR22/CR28 User manual for the BougeRV Portable Car Refrigerator, models CR22 and CR28 (23QT/30QT). Provides safety instructions, product features, operation guide, troubleshooting, and warranty information.

	<p>Guide d'utilisation 2007 - Spas Portables Cal Spas</p> <p>Manuel d'utilisation complet pour les spas portables Cal Spas 2007. Ce guide couvre l'installation, le fonctionnement, la sécurité, l'entretien et les spécifications pour tous les modèles.</p>
	<p>Getinge Signature Service: Equipment Parts Guide</p> <p>Comprehensive parts guide for Getinge Signature Service equipment, covering sterilizers, washers, surgical tables, lights, and more. Find model numbers and component details for healthcare and life science equipment.</p>
	<p>Fakir Home Appliances Catalog and Product Overview</p> <p>Discover Fakir's extensive range of high-quality German home appliances, including vacuum cleaners, kitchen gadgets, personal care items, and more, backed by over 90 years of innovation and commitment to home well-being.</p>

Documents - Capello – CR22



[\[pdf\]](#) User Manual Instructions

Provided by ManualsAndMore Download User Manual capello CR50 manualsandmore |||

Sleep Sound wireless speaker and alarm clock with phone charger CR50 CAUTION RISK OF ELECTRIC SH ... SB plug is firmly connected into both ports of the CR50 and your USB compatible device and that the **CR22** is plugged in to a power source as the USB charging ports will not operate from the backup batt...

lang:en score:25 filesize: 367.82 K page_count: 16 document date: 2019-07-24