



[Manuals.plus](#) /

> [Quicrent](#) /

> Quicrent 10x20 ft Heavy Duty Carport Canopy Instruction Manual

Quicrent 1111G

Quicrent 10x20 ft Heavy Duty Carport Canopy Instruction Manual

Model: 1111G

INTRODUCTION

This manual provides comprehensive instructions for the assembly, operation, and maintenance of your Quicrent 10x20 ft Heavy Duty Carport Canopy. Please read all instructions carefully before beginning assembly to ensure safe and correct usage.

SAFETY INFORMATION

- This product is not intended for permanent use and should be securely anchored to withstand winds.
- Avoid direct exposure to UV rays during peak hours to prolong the life of the canopy material.
- Always follow assembly instructions precisely.
- Regularly inspect the structure for any damage or wear and tear. Address issues promptly to maintain structural integrity.
- Ensure all connections are tight and secure after assembly and periodically check for loosening.

PARTS LIST

Before beginning assembly, verify that all parts are present and undamaged. Refer to the included packing list for specific quantities. Key components include:

- Galvanized Steel Poles (various lengths, typically numbered for identification)
- Metal Connectors (3-way, 4-way, corner pieces)
- Heavy-Duty Polyethylene Tarp (main cover)

- Support Braces
- Foot Plates for vertical poles
- Bungee Cords for securing the tarp
- Ropes and Spiral Pegs/Stakes for anchoring
- Screws and Wing Nuts for securing connections



Image: Various components of the carport frame, including poles, connectors, and anchoring hardware, laid out for assembly.

SETUP AND ASSEMBLY INSTRUCTIONS

It is recommended that two people assemble this carport for efficiency and ease. Follow these steps carefully:

Step 1: Lay Out the Frame Poles

Begin by laying out all the numbered poles on a flat, clear surface according to the diagram in your instruction booklet. Ensure you identify the correct poles for the perimeter and cross-sections (e.g., Bar 1, Bar 2, Bar 4).

INSTALLATION STEPS

1



Assemble the top frame

2



Cover the frame with tarpaulin

3



Assemble 8 pillar steel pipes

Image: Visual guide illustrating the assembly sequence: assembling the top frame, covering with tarp, and attaching pillar steel pipes.

Step 2: Assemble the Top Frame

Connect the horizontal poles using the appropriate metal connectors. The video demonstrates using T-shaped connectors for center pieces and curved connectors for corners. Ensure the spring buttons click into place for a secure connection.

Your browser does not support the video tag.

Video: A detailed demonstration of assembling the top frame of the QuicTent Carport Canopy, including connecting poles and adding cross supports. (Source: Brandline)

Step 3: Attach Cross Supports

Once the main top frame is assembled, attach the cross supports to provide additional stability. These typically connect between the angled roof poles using screws and wing nuts.

Step 4: Drape and Secure the Tarp

Carefully drape the polyethylene tarp over the assembled top frame. Ensure it is centered and covers the entire frame. Use the provided bungee cords to secure the tarp to the frame poles through the grommets on

the tarp's edges. Loop the bungee cords through the grommets and around the poles, ensuring a snug fit.

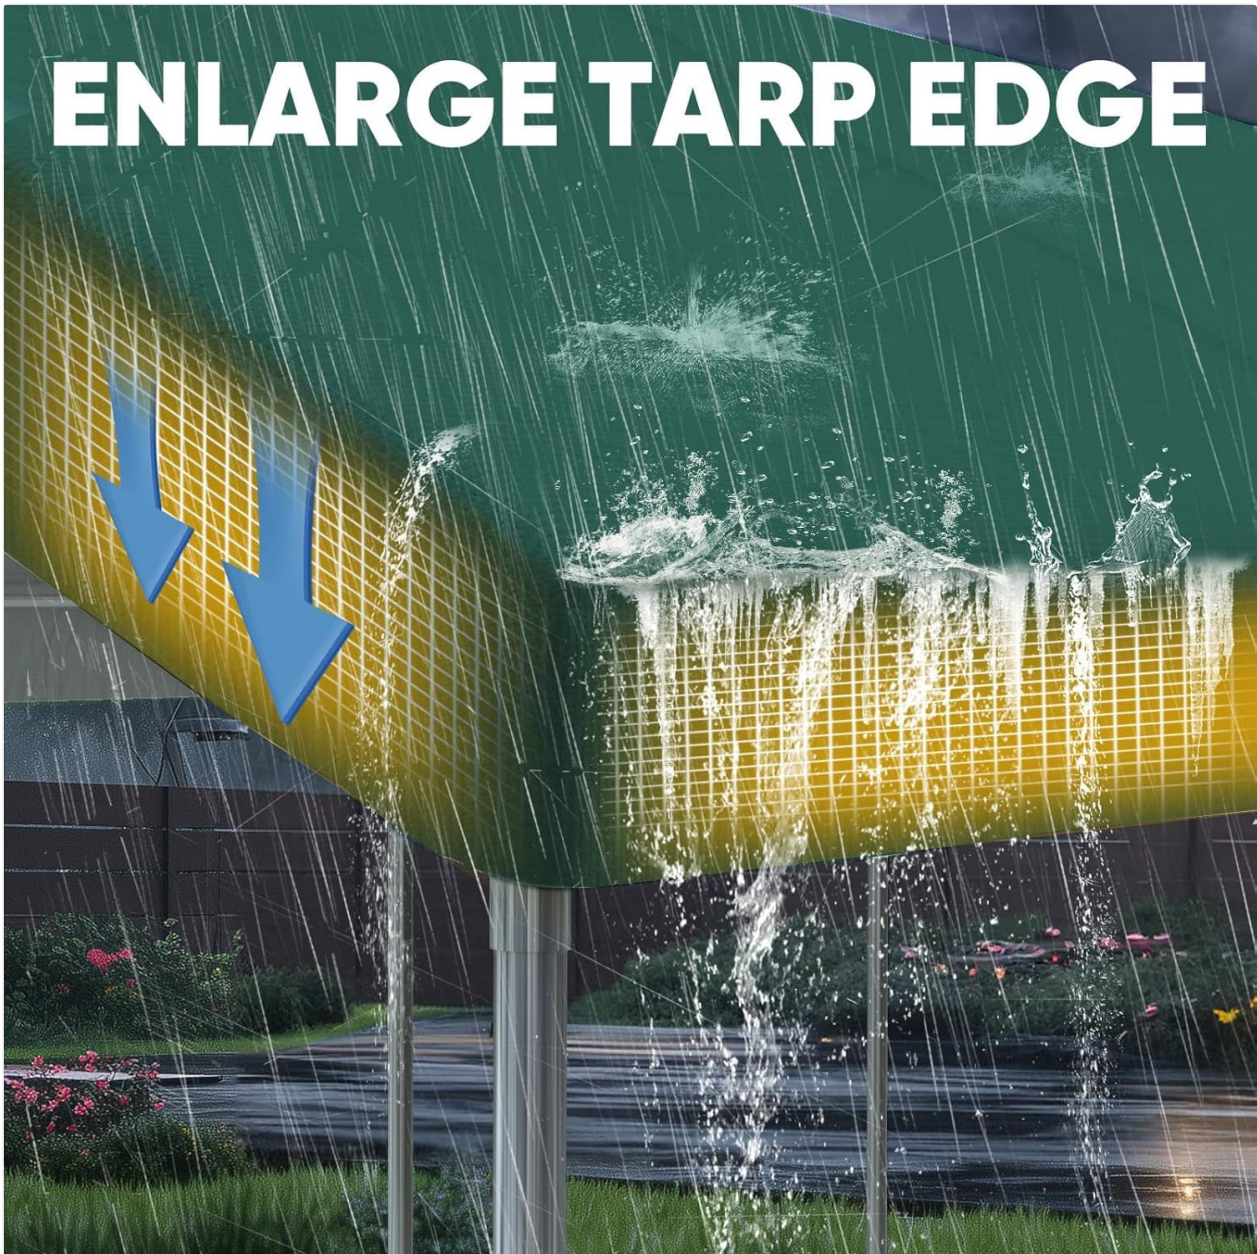


Image: The enlarged tarp edge design, which helps with water runoff and provides enhanced protection.

Step 5: Install Vertical Support Poles and Feet

Attach the vertical support poles to the corners and sides of the top frame. Slide the foot plates onto the bottom of each vertical pole. Secure the poles to the foot plates using the provided screws and wing nuts, ensuring a stable base.

Step 6: Anchor the Structure

For maximum stability and to prevent wind damage, anchor the carport to the ground. Attach the provided ropes to the frame and secure them to the ground using the spiral pegs/stakes. Drive the stakes firmly into the ground at an angle away from the carport for optimal hold. Additionally, use the small stakes to secure the foot plates directly to the ground.



Image: The fully assembled carport canopy providing shelter for a vehicle.

OPERATING INSTRUCTIONS

Your QuicTent carport is designed to provide reliable shelter for vehicles, boats, or outdoor equipment. Its reinforced structure and extra-thick polyethylene fabric offer protection against various elements.

- **Vehicle Protection:** Park your vehicle or boat under the canopy to shield it from sun, rain, light snow, and other environmental factors.
- **Outdoor Storage:** Utilize the covered space for storing garden tools, equipment, or other items that require protection from the elements.
- **Weather Resistance:** The reinforced PE material is tear-proof, waterproof, and anti-UV, designed to withstand various weather conditions, including protection from berry drippings and bird droppings.

WITHSTAND ALL ELEMENTS COVER



Image: The carport's cover is designed to withstand various elements, including water, berries, and bird droppings.

MAINTENANCE

Proper maintenance will extend the lifespan of your carport canopy:

- **Regular Inspection:** Periodically check all poles, connectors, and the tarp for any signs of damage, rust, or wear.
- **Tighten Connections:** Ensure all screws, wing nuts, and bungee cords remain tight and secure. Retighten as necessary.
- **Clean Tarp:** Clean the polyethylene tarp regularly with mild soap and water to remove dirt, debris, or stains. Avoid harsh chemicals that could damage the material.
- **Snow Removal:** In areas with heavy snowfall, regularly remove accumulated snow from the canopy to prevent structural collapse.
- **Anchoring:** Verify that all ropes and stakes are firmly in the ground, especially before anticipated strong winds or storms.

TROUBLESHOOTING

If you encounter any issues with your Quictent carport, consider the following:

- **Instability:** Ensure all poles are fully inserted into connectors and secured. Check that all cross supports are correctly installed and tightened. Verify that the anchoring ropes and stakes are properly deployed and firmly in the ground.
- **Tarp Sagging/Pooling Water:** Adjust the tension of the bungee cords to ensure the tarp is taut. Check that the frame is correctly assembled and not warped, which could cause uneven tension.
- **Missing Parts:** If you find any parts missing upon initial inspection, contact customer support immediately.

SPECIFICATIONS

Feature	Detail
Brand	Quictent
Model Number	1111G
Material	Alloy Steel Frame, Polyethylene Tarp
Color	Green
Product Dimensions	240"L x 120"W x 105"H (20'L x 10'W x 8.75'H)
Max Ceiling Height	8.7 Feet
Water Resistance Level	Waterproof
Ultraviolet Light Protection	Yes
Item Weight	83.8 pounds
Assembly Required	Yes

SIZE INFORMATION



Image: Key dimensions of the Quicent 10x20 ft carport canopy.

WARRANTY AND SUPPORT

Quicent offers the following warranty and support for your carport canopy:

- **Canopy Frames and Covers:** Enjoy 1 year of protection.
- **Connectors, Pegs, Ropes, Elastic Ropes, and More:** Lifetime replacement.
- **Customer Service:** For any issues or technical support, contact Brandline. Professional technical support and solutions are provided within 12 hours.

For further assistance, please visit the [Quicent Store on Amazon](#) or contact Brandline directly.

