

Manuals.plus /

› savvies /

› Savvies Screen Protector Instruction Manual

savvies SU75 UltraClear Screen Protector for Swissphone s.Quad C35

Savvies Screen Protector Instruction Manual

For Swissphone s.Quad C35

INTRODUCTION

This manual provides detailed instructions for the proper installation and care of your Savvies SU75 UltraClear Screen Protector, designed specifically for the Swissphone s.Quad C35 device. Following these guidelines will ensure optimal protection and longevity of your device's screen.

The Savvies SU75 UltraClear Screen Protector offers superior transparency and touch sensitivity, providing an almost invisible layer of protection against scratches and dust.

SETUP AND INSTALLATION

Before beginning the installation, ensure your workspace is clean and dust-free. It is recommended to perform the installation in a well-lit area, such as a bathroom after a hot shower, as the steam helps settle dust particles in the air.

Preparation Steps:

1. **Clean the Device Screen:** Use a microfiber cloth to thoroughly clean the screen of your Swissphone s.Quad C35. Ensure there are no dust particles, smudges, or fingerprints. For stubborn marks, a screen cleaning solution can be used, followed by drying with a clean cloth.
2. **Inspect the Screen Protector:** Carefully remove the screen protector from its packaging. Avoid touching the adhesive side.

Installation Procedure:

1. **Align the Protector:** Gently peel back about half of the thin cover film (labeled "1" or similar) from the screen protector. Carefully align the exposed adhesive side with the top edge of your Swissphone s.Quad C35 screen. Ensure precise alignment with the device's speaker, camera, and sensors.



Instructions

Anbringungsanleitung



1 Before assembling, locate a dust free area (e.g. bathroom) and carefully remove any dust or dirt from the display.

1 Nutze zur optimalen Montage einen staubarmen Ort (z. B. Badezimmer) und reinige das Display gründlich von Staub und Verschmutzungen.



2 Remove half of the thin cover film of the screen protector and align the screen protector on one side with your screen. Make sure that the screen protector will be centered on the middle of the screen.

2 Löse das Trägermaterial zur Hälfte unterhalb der Displayschutzfolie ab und setze diese an einer Seite des Displays an. Die Displayschutzfolie sollte in aufgezogenem Zustand mittig ausgerichtet sein.



3 Cover a credit card with a soft cloth and carefully slide over the screen protector from one side to the other on your screen. Pull off the rest of the cover film at the same time.

3 Streiche die Displayschutzfolie leicht mittels einer, mit weichem Tuch umwickelten, Kreditkarte von einer Seite zur anderen auf das Display. Ziehe dabei gleichzeitig den Rest des Trägermaterial ab.



4 Brush out any remaining air bubbles with your credit card. Small air bubbles will disappear by themselves within 2-3 days - Done!

4 Streiche eventuell vorhandene Lufteinschlüsse mit Hilfe der Kreditkarte seitlich heraus. Kleine Luftblasen verschwinden innerhalb von 2-3 Tagen von selbst - Fertig!



Instructions in various languages can be found inside >>

Screen protectors are also available for the following devices and many more:



Bedifol GmbH, D-78467 Konstanz
© 2022 Bedifol GmbH. All rights reserved.

Made in Germany
www.savvies.eu

© 2022 Bedifol GmbH, D-78467 Konstanz
Bedifol GmbH. All rights reserved.

Made in Germany
www.savvies.eu

Figure 1: Initial alignment of the screen protector on the device. Ensure the screen is clean and free of dust before application.

2. **Apply and Smooth:** Once the top half is aligned, slowly peel off the remaining cover film while simultaneously using a credit card or a similar flat, soft-edged tool to smooth the screen protector onto the screen. Apply gentle, even pressure from the top downwards, pushing out any air bubbles towards the edges.





Figure 2: Using a smoothing tool to apply the screen protector and remove air bubbles. Work from one end to the other.

- 3. Remove Remaining Bubbles:** After the protector is fully applied, small air bubbles may remain. Use the credit card to gently push these bubbles towards the nearest edge of the screen. Most small bubbles will disappear on their own within 2-3 days as the adhesive fully cures.

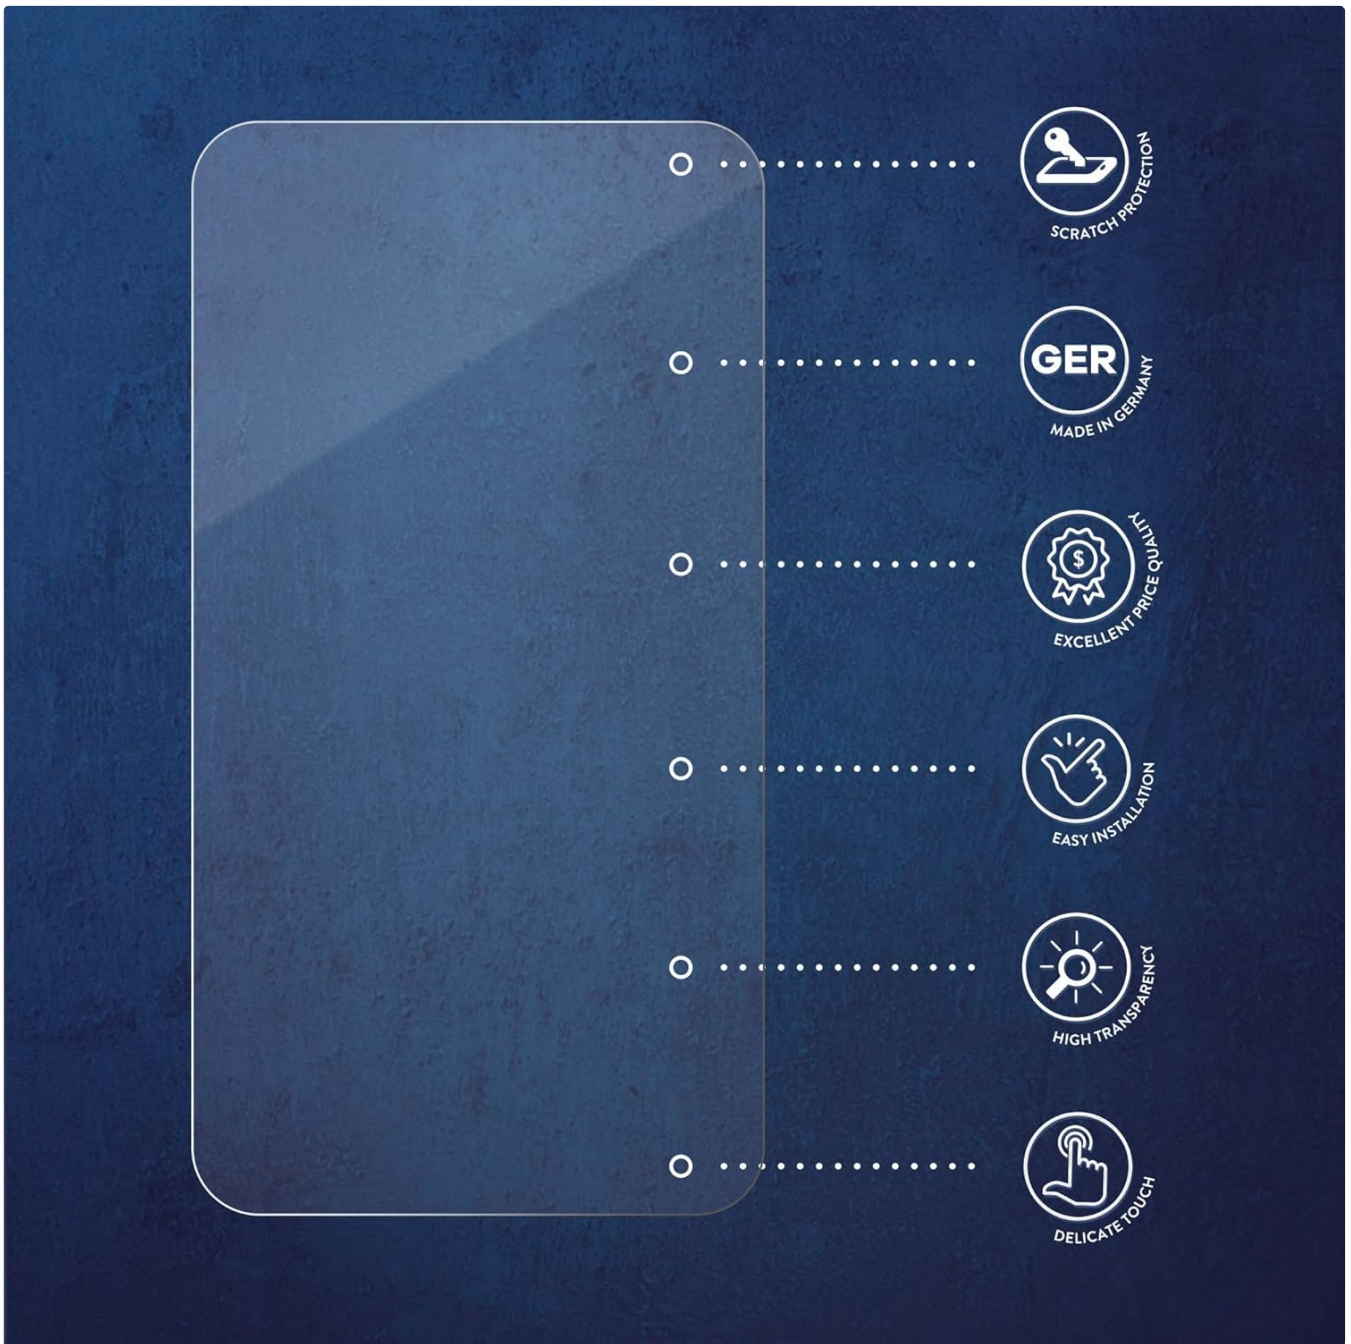


Figure 3: Final smoothing to eliminate air bubbles. Persistent bubbles can often be worked out to the edge.

4. **Final Inspection:** Once installed, the screen protector should be almost invisible. Check for any remaining dust particles or large bubbles. If necessary, the protector can be carefully lifted and repositioned, but this should be done immediately after initial application to avoid dust contamination.

OPERATING CONSIDERATIONS

The Savvies SU75 UltraClear Screen Protector is designed to maintain the original touch sensitivity and display clarity of your Swissphone s.Quad C35. No special operating adjustments are typically required after installation.

- **Touch Sensitivity:** The protector is optimized for touch screens, ensuring that your device's responsiveness remains unaffected.
- **Display Clarity:** The ultra-thin, 99% highly transparent HD surface ensures a clear and genuine presentation of screen content and colors.

MAINTENANCE AND CARE

Proper care of your screen protector will extend its lifespan and maintain its protective qualities.

- **Cleaning:** To clean the screen protector, gently wipe it with a soft, lint-free cloth. For smudges or fingerprints, a slightly damp cloth or a screen cleaning spray can be used. Avoid harsh chemicals or abrasive materials.
- **Protection:** While the protector offers significant scratch resistance, avoid placing your device with sharp objects (e.g., keys, coins) in pockets or bags to prevent excessive wear.
- **Replacement:** If the screen protector becomes heavily scratched, damaged, or starts to peel, it is recommended to replace it with a new one to ensure continued protection for your device's screen. This product comes in an 18-pack for multiple replacements.

TROUBLESHOOTING

Most common issues during screen protector installation can be resolved with careful attention to the steps.

Common Issues and Solutions

Issue	Possible Cause	Solution
Bubbles under the protector	Trapped air during application.	Use a credit card to push bubbles towards the nearest edge. Small bubbles often disappear within 2-3 days.
Dust particles trapped	Screen not thoroughly cleaned before application.	Carefully lift the nearest corner of the protector, use a dust-removal sticker or tape to lift the dust, then reapply. If persistent, use a new protector.
Protector not adhering properly	Oils/fingerprints on screen or adhesive side, or improper alignment.	Ensure screen is clean. If adhesive side was touched, it may be compromised. Realign carefully. If issue persists, use a new protector.

SPECIFICATIONS

Key technical specifications for the Savvies SU75 UltraClear Screen Protector:

- **Product Name:** Savvies SU75 UltraClear Screen Protector
- **Compatibility:** Swissphone s.Quad C35
- **Material:** Polyethylene Terephthalate (PET)
- **Transparency:** 99% HD-Clear
- **Features:** Ultra-thin, 3D Touch Compatible, Anti-Fingerprint surface, Bubble-free application, Residue-free removal, Precision cut.
- **Dimensions:** Approximately 7"L x 4"W (tailored to device)
- **Quantity:** 18-Pack
- **Manufacturer:** Savvies (Made in Germany)



Figure 4: Savvies Ultra Clear Screen Protector packaging, showing the 18-pack quantity.



Figure 5: A single Savvies screen protector, demonstrating its precise cut and transparent material.

WARRANTY AND SUPPORT

Savvies products are manufactured with high quality standards. While specific warranty details are not provided in the product description, general consumer rights and return policies apply. For any issues or support inquiries, please refer to the retailer's return policy or contact Savvies directly through their official channels.

The brand "Savvies" is registered at the European trademark office with the register number: 009362542. This ensures the authenticity and quality of the product.