

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [HOREVO](#) /

› [HOREVO 15-inch Smart WiFi Ceiling Light with Bluetooth Speaker User Manual](#)

HOREVO 16-0003-00042

HOREVO 15-inch Smart WiFi Ceiling Light with Bluetooth Speaker User Manual

Model: 16-0003-00042

1. PRODUCT OVERVIEW

The HOREVO 15-inch Smart WiFi Ceiling Light is a versatile lighting solution featuring integrated Bluetooth speaker functionality. It offers smart control options including voice control via Alexa and Google Home, remote control, and mobile application control. This manual provides detailed instructions for installation, operation, and maintenance.



Image: The HOREVO Smart Ceiling Light, illustrating its Bluetooth speaker and compatibility with smart home devices like Amazon Alexa and Google Home, along with remote and app control options.

Key Features:

- **Voice Control:** Compatible with Amazon Alexa and Google Home for hands-free operation.
- **Integrated Bluetooth Speaker:** Play music directly from your mobile device.
- **App Control:** Manage lighting settings and music via a dedicated mobile application.
- **Remote Control:** Included 2.4G remote for convenient adjustments.
- **Dimmable & Color Changing:** Adjust brightness and choose from various light colors (RGB) and color temperatures (white/warm white).
- **Memory Function:** Retains the last light setting when turned off and on.
- **Timer Function:** Schedule automatic on/off times.
- **Energy Efficient:** 36W LED design for energy saving.

2. SAFETY INFORMATION

- Always turn off the power at the circuit breaker before installation or maintenance.
- Installation should be performed by a qualified electrician if you are unsure about wiring procedures.
- Ensure all connections are secure and comply with local electrical codes.
- Do not expose the light fixture to water or excessive moisture.
- This product is designed for indoor use only.

3. INSTALLATION GUIDE

Follow these steps carefully to install your HOREVO Smart WiFi Ceiling Light.

1. Prepare for Installation:

- Turn off the main power supply at the circuit breaker.
- Gather necessary tools: screwdriver, drill, hammer (if needed for anchors).

2. Remove Lamp Cover:

- Rotate the lamp cover counter-clockwise to detach it from the main fixture body.

3. Mount the Fixture Base:

- Position the fixture base on the ceiling where you intend to install it.
- Mark the screw holes on the ceiling.
- Drill holes at the marked positions and insert plastic anchors (geckos) if required for your ceiling type.
- Secure the fixture base to the ceiling using screws.

4. Connect Wiring:

- Connect the two power cables from the ceiling light to your household electrical wires. The light fixture typically uses brown and blue wires. Brown is generally live, and blue is neutral. If your household wiring uses different colors (e.g., red, black, white), consult a qualified electrician or refer to local wiring standards. This fixture does not require a ground wire connection.
- Ensure connections are secure, preferably using wire nuts and insulation tape.

5. Attach Lamp Cover:

- Align the lamp cover with the fixture base.
- Snap the lamp cover onto the ceiling plate and turn it clockwise to fix it securely.

6. Restore Power:

- Turn the main power supply back on at the circuit breaker.

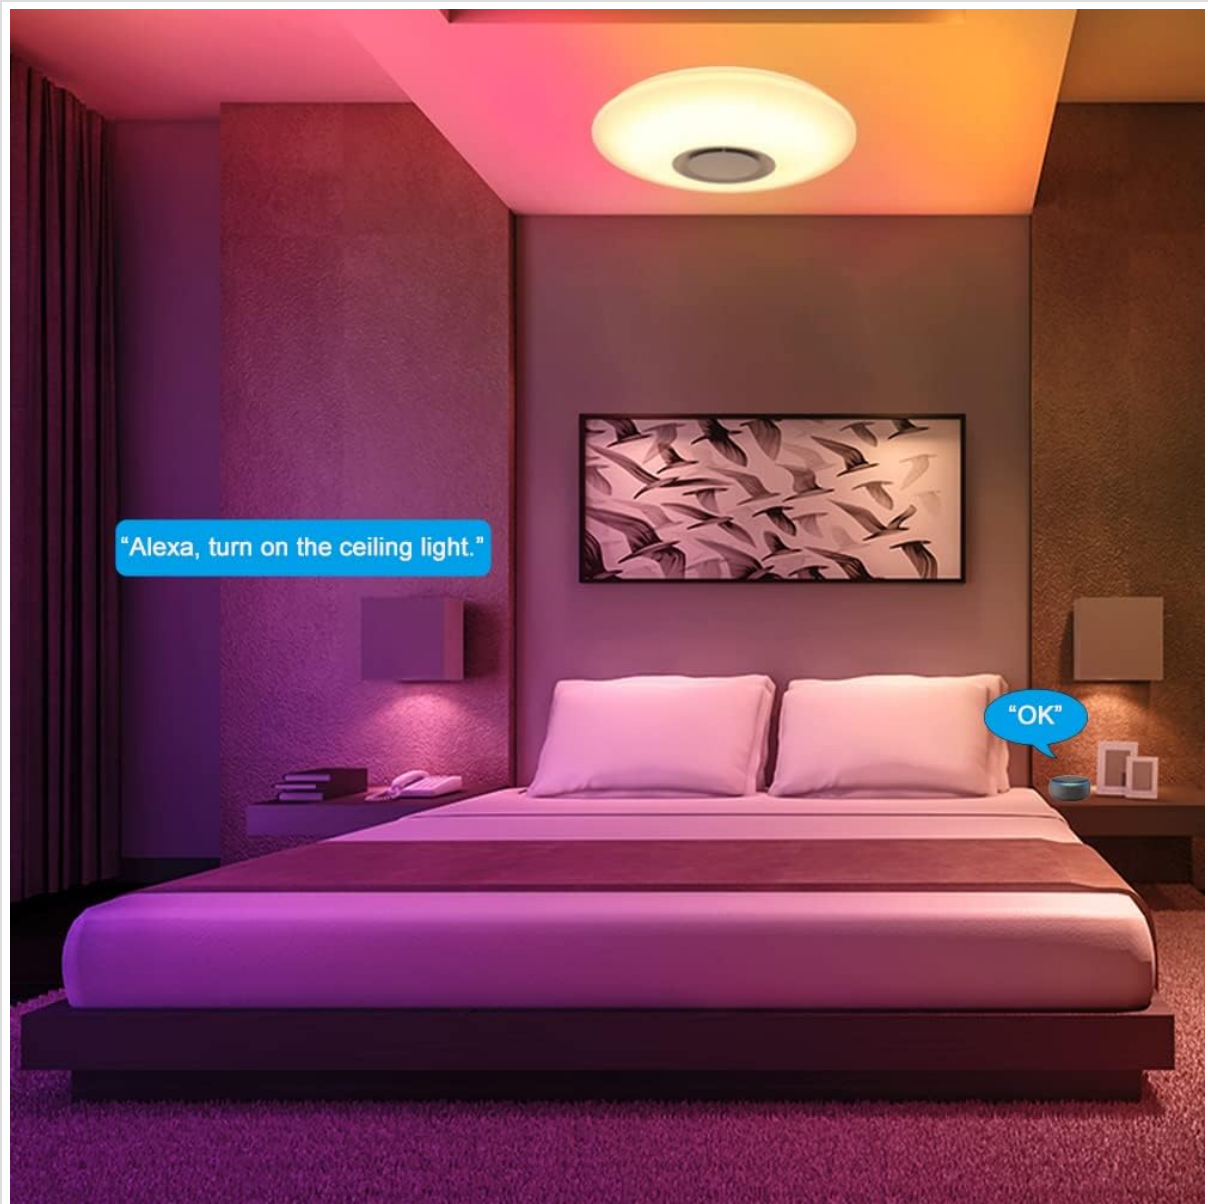



Image: Step-by-step installation diagram for the HOREVO Smart Ceiling Light, illustrating how to remove the cover, mount the base, connect wires, and reattach the cover.

4. OPERATING INSTRUCTIONS

4.1 Power On/Off and Basic Lighting

Once installed, turn on the light using your wall switch. The light will default to the last used setting due to its memory function (if the light was off for more than 10 seconds).

Voice Control

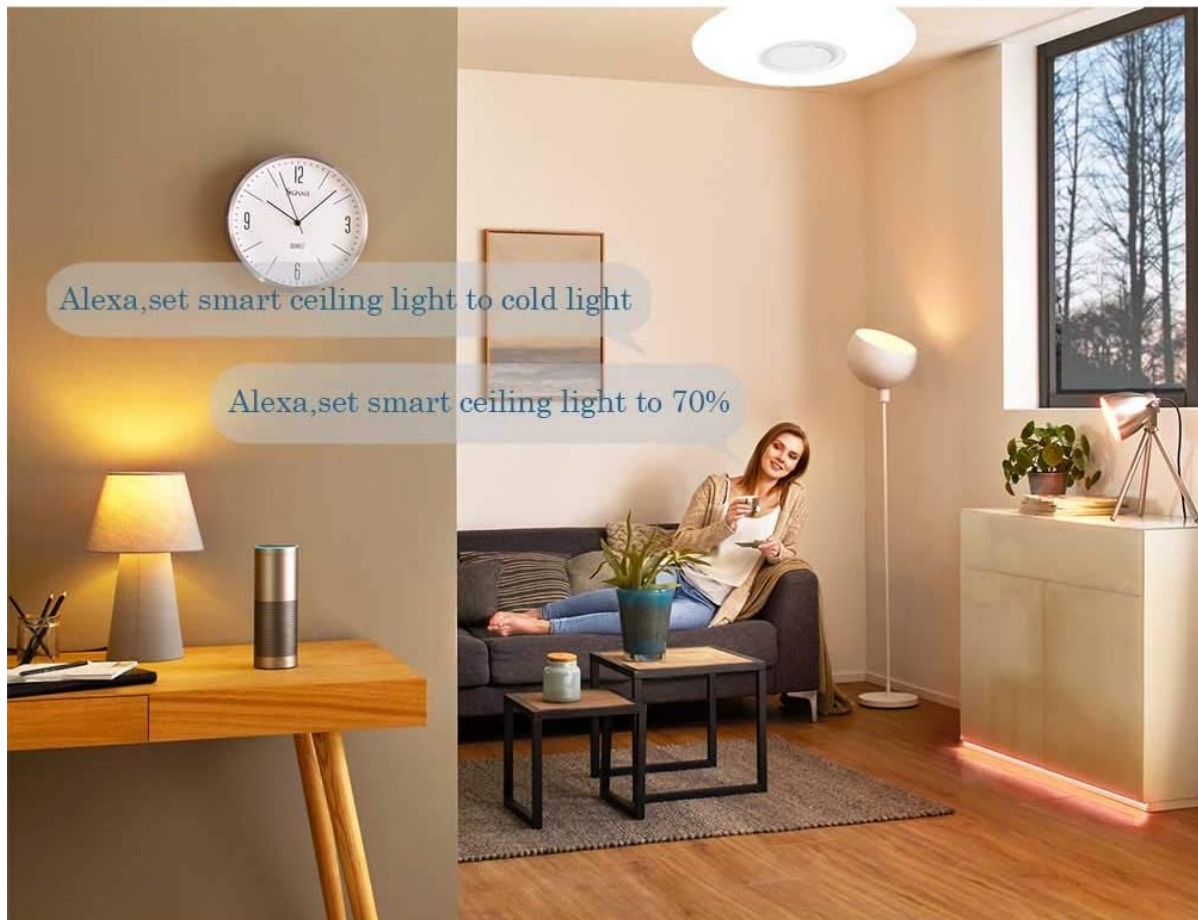

WORKS WITH
amazon alexa



Google Assistant

Image: The HOREVO Smart Ceiling Light illuminated in both warm white and cool white settings, demonstrating its adjustable color temperature.

4.2 Remote Control

The included 2.4G remote control allows for convenient adjustment of light settings.

- **On/Off:** Power the light on or off.
- **Brightness Adjustment:** Increase or decrease light intensity.
- **Color Temperature:** Switch between warm white, cool white, and other preset white tones.
- **RGB Colors:** Select various static RGB colors.
- **Mode Selection:** Cycle through different lighting modes (e.g., night light, party mode).

4.3 Mobile Application Control

Download the compatible mobile application (refer to the packaging or quick start guide for QR code/app name) to unlock full smart features.

- **App Pairing:** Follow the in-app instructions to pair your light. Ensure your phone is connected to a 2.4GHz WiFi network during pairing.
- **Full Color & Brightness Control:** Fine-tune colors and brightness levels.
- **Dynamic Scenes:** Access pre-programmed dynamic lighting scenes.
- **Scheduling & Timer:** Set schedules for the light to turn on/off automatically.

4.4 Voice Control (Alexa & Google Home)

After connecting the light to your home's 2.4GHz WiFi network via the mobile app, you can integrate it with Amazon Alexa or Google Home.

1. Enable the relevant skill/service in your Alexa or Google Home app.
2. Discover devices.
3. Use voice commands such as:
 - "Alexa, turn on the ceiling light."
 - "Hey Google, set the ceiling light to 50% brightness."
 - "Alexa, change the ceiling light to blue."

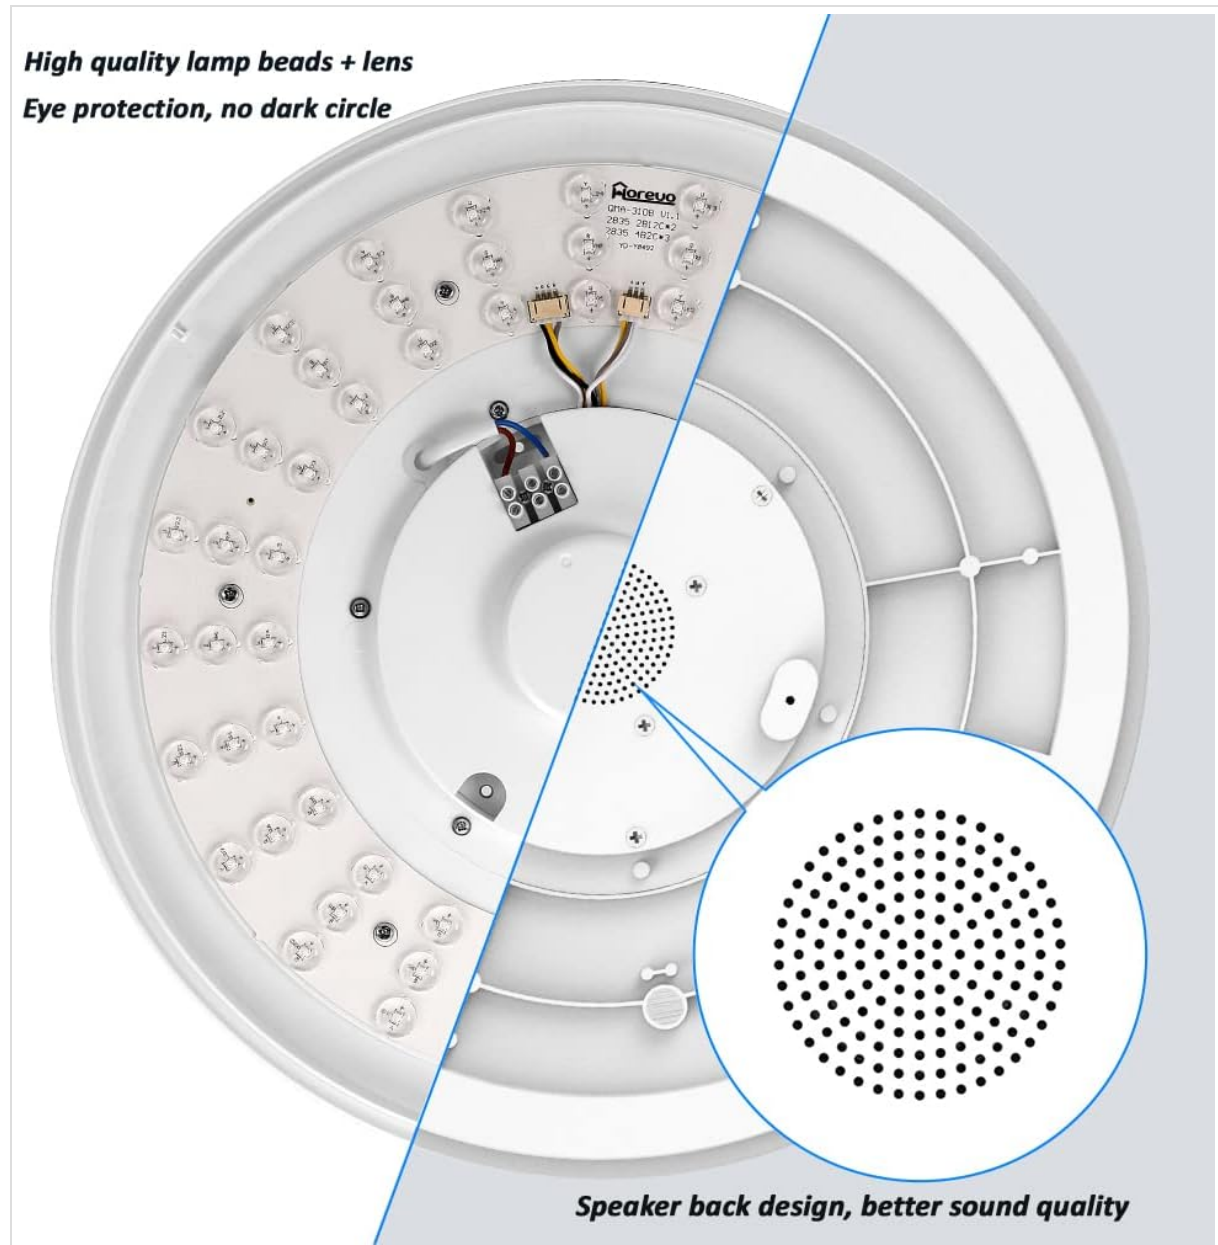


Image: A bedroom setting demonstrating voice control with the HOREVO Smart Ceiling Light, showing a user commanding "Alexa, turn on the ceiling light."

4.5 Bluetooth Speaker Functionality

The integrated Bluetooth speaker allows you to play audio from your mobile device.

1. Ensure the light is powered on.
2. On your mobile device, go to Bluetooth settings and search for available devices.

3. Select the HOREVO light (usually named something like "HOREVO Speaker" or similar) to pair.
4. Once paired, you can play music or other audio through the ceiling light's speaker.

Note: The speaker is an independent component and cannot be used as an Amazon Echo or Google Home speaker for voice assistant responses. It functions solely as an audio output device.

4.6 Memory Function

The light retains its last setting (brightness, color, mode) when turned off and on. For the memory function to work correctly, ensure the light remains on or off for more than 10 seconds before changing its state.

5. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ceiling light.

- **Cleaning:** Disconnect power before cleaning. Wipe the light fixture with a soft, dry, or slightly damp cloth. Do not use abrasive cleaners, solvents, or harsh chemicals, as these can damage the finish or electronic components.
- **Eye Protection:** The light is designed with high-quality lamp beads and lenses to minimize flicker and provide even illumination, contributing to eye comfort.
- **Component Access:** The LED components and speaker are integrated. Do not attempt to disassemble the fixture beyond removing the lamp cover for installation or cleaning.

6. TROUBLESHOOTING

If you encounter issues with your HOREVO Smart WiFi Ceiling Light, refer to the following troubleshooting tips:

- **Light does not turn on:**
 - Check the power supply at the circuit breaker.
 - Ensure all wiring connections are secure.
 - Verify the wall switch is in the ON position.
- **Remote control not responding:**
 - Check the remote control battery.
 - **Re-synchronize the remote:** Turn the ceiling light off and then immediately back on using the wall switch. Within 3 seconds of turning it on, press the central button on the remote control. The light should flash to confirm synchronization.
- **Cannot connect to WiFi/App:**
 - Ensure your router is broadcasting a 2.4GHz WiFi network. The light does not support 5GHz WiFi.
 - Make sure your mobile device is connected to the 2.4GHz network during the pairing process.
 - Restart your router and the ceiling light.
 - Ensure the light is within range of your WiFi router.
- **Bluetooth speaker not connecting or poor sound quality:**
 - Ensure Bluetooth is enabled on your mobile device and the light is powered on.
 - Unpair and re-pair the Bluetooth connection.

- Move your mobile device closer to the light fixture.
 - Note that the speaker is designed for general audio playback and may not offer high-fidelity sound or strong bass.
- **Memory function not working:**
 - Ensure the light remains in its desired state (on or off) for at least 10 seconds before toggling the power.

7. SPECIFICATIONS

Brand	HOREVO
Model Number	16-0003-00042
Product Dimensions	15.75"L x 15.75"W x 2.17"H (400mm diameter)
Item Weight	2.54 Pounds
Material	Acrylic, Plastic (Shade)
Light Source Type	LED
Wattage	36 Watts
Voltage	110 Volts
Brightness	2000 Lumen
Color Temperature	6500 Kelvin (also white/warm white/color light options)
Connectivity	Bluetooth, Wi-Fi (2.4GHz only)
Control Method	Remote, App, Voice (Alexa, Google Home)
Included Components	Remote Control

Smart WIFI Ceiling Light

36WATT

3000-6500k
color temperature

RGB Color Change

IP44

3200
Lumens

Rmote / APP / Voice Control



Image: A visual representation of the HOREVO Smart WiFi Ceiling Light's specifications, including wattage, color temperature range, IP rating, lumens, and control methods.

8. WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the documentation included with your product packaging or visit the official HOREVO website. Keep your purchase receipt as proof of purchase for any warranty claims.

If you require further assistance or have questions not covered in this manual, please contact HOREVO customer service through their official channels.