

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [Kungfuking](#) /

› [Kungfuking Automatic Pop-Up Outlet Surge Protector User Manual \(Model: B01LYLGNOC\)](#)

## Kungfuking B01LYLGNOC

# Kungfuking Automatic Pop-Up Outlet Surge Protector User Manual

Model: B01LYLGNOC

## 1. INTRODUCTION

This manual provides instructions for the installation, operation, and maintenance of your Kungfuking Automatic Pop-Up Outlet Surge Protector. Please read this manual thoroughly before installation and use to ensure safe and efficient operation.

## 2. PRODUCT FEATURES

- **4 US AC Outlets:** 15A/125V/1875W capacity for standard electrical devices.
- **2 USB Ports:** 2.4A total maximum output for charging mobile devices.
- **1 RJ45 Port:** For network connectivity.
- **1 HDMI Port:** For video and audio transmission.
- **5W Wireless Charging Station:** Integrated on the top surface for Qi-compatible devices.
- **Automatic Retractable Design:** Pop-up and retract mechanism for discreet integration.

## 3. SAFETY INSTRUCTIONS

- The socket is non-waterproof. Protect it from water spray and liquids.
- Install this product in a location inaccessible to children to ensure personal safety.
- Always check for obstructions that could interfere with the unit's operation before use or retraction.
- Use only indoors.
- Do not disassemble or modify the unit. Refer to qualified personnel for repairs.
- Ensure the power cord is not pinched or damaged during installation or use.

## 4. SETUP

### 4.1 Required Tools

- Hole saw (4.7 inches / 120mm diameter)
- Drill
- Measuring tape
- Safety gloves and eye protection

## 4.2 Installation Steps

1. **Prepare the Surface:** Choose a suitable location on your countertop, desk, or table. Ensure there is sufficient clearance below the surface for the unit to retract fully (approximately 5.90 inches / 150mm depth).

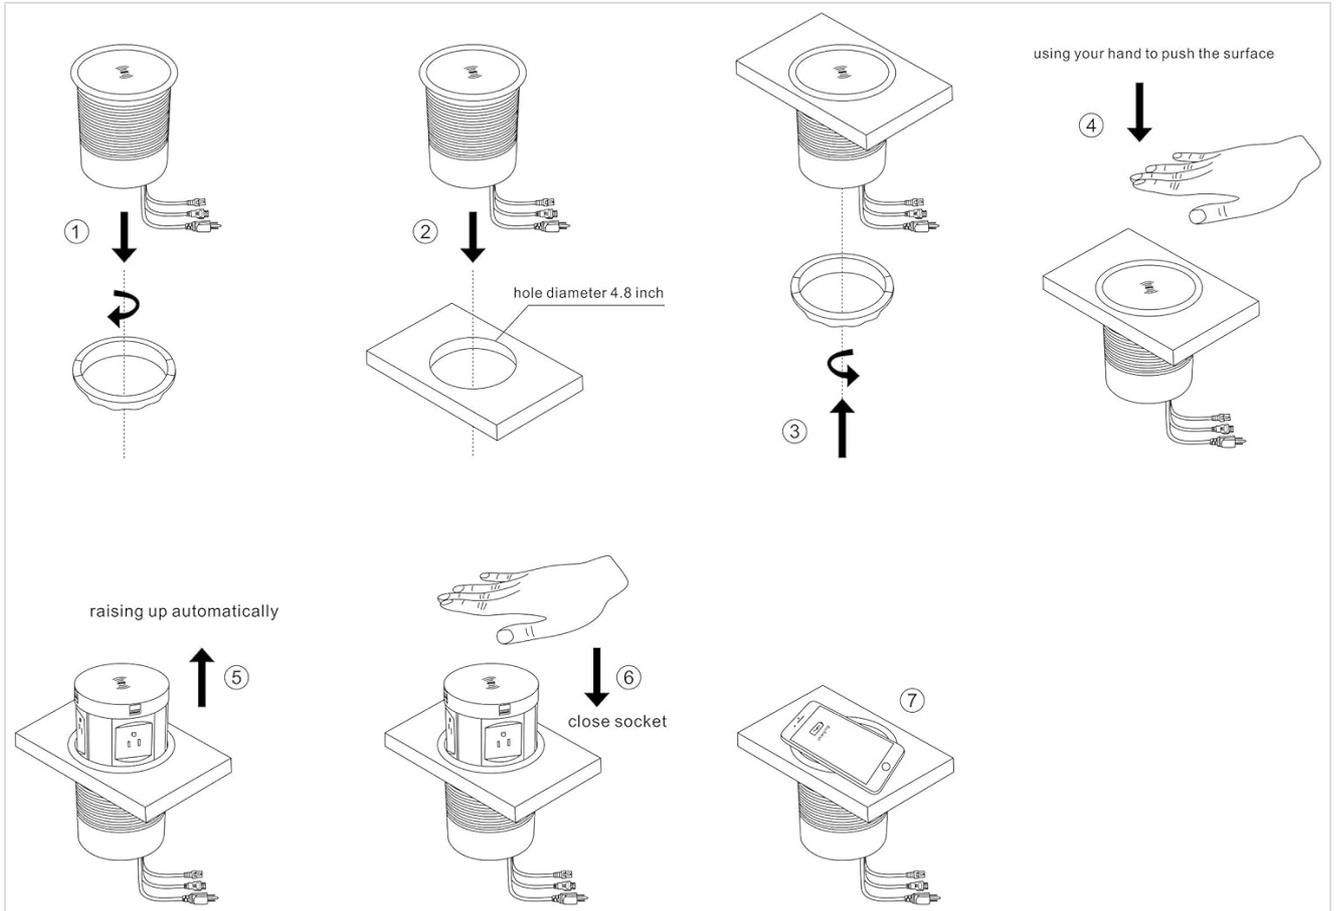


Image: Diagram showing the pop-up outlet's dimensions, including a hidden length of 5.90 inches and a required hole diameter of 4.7 inches ( $\pm 0.5$  inches).

2. **Drill the Hole:** Using a 4.7-inch ( $\pm 0.5$  inches) hole saw, carefully drill a circular hole through the chosen surface.



*Image: Step-by-step diagram illustrating the installation process, starting with drilling a 4.8-inch diameter hole.*

3. **Insert the Unit:** Unscrew and remove the retaining ring from the bottom of the pop-up outlet. Insert the main body of the outlet into the drilled hole from the top.
4. **Secure the Unit:** From underneath the surface, screw the retaining ring back onto the unit and tighten it securely to hold the pop-up outlet in place.
5. **Connect Power:** Plug the power cord of the pop-up outlet into a standard 125V AC wall outlet.



*Image: The pop-up outlet is shown installed in a desk, providing power and charging for a laptop and smartphone.*

### **4.3 Installation Video**

Your browser does not support the video tag.

*Video: This video demonstrates the installation process of the pop-up outlet, including drilling the hole and securing the unit.*

## **5. OPERATING INSTRUCTIONS**

---

## 5.1 Extending the Unit

Gently press down on the top surface of the unit. The unit will automatically rise, revealing the AC outlets, USB ports, RJ45 port, and HDMI port.



*Image: The pop-up outlet is shown in its extended position on a desk, ready for use.*

## 5.2 Retracting the Unit

When not in use, gently push down on the top surface of the unit until it locks flush with the countertop. Ensure no cables are obstructing the retraction mechanism.



Image: The pop-up outlet is shown retracted and flush with a kitchen island countertop, maintaining a clean surface.

### 5.3 Wireless Charging

Place your Qi-compatible smartphone or device on the top surface of the unit for 5W wireless charging. Remove phone cases thicker than 6mm for optimal charging performance.



Image: A smartphone is shown wirelessly charging on the top surface of the pop-up outlet.

## 6. MAINTENANCE

- Clean the surface of the unit with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- Regularly check the power cord for any signs of damage. If damaged, discontinue use and contact customer support.
- Ensure the retraction mechanism is free from debris to prevent jamming.

## 7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Unit does not pop up/retract.	Obstruction in mechanism.	Check for and remove any debris or cables obstructing the unit.
No power from AC outlets/USB ports.	Unit not plugged in or circuit breaker tripped.	Ensure the unit is securely plugged into a live outlet. Check and reset the circuit breaker if necessary.
Wireless charging not working.	Device not Qi-compatible, misaligned, or phone case too thick.	Ensure device supports Qi wireless charging. Reposition the device. Remove thick phone cases.

### 7.1 Troubleshooting Video

Your browser does not support the video tag.

*Video: This video addresses common issues such as the pop-up outlet not extending or retracting properly.*

## 8. SPECIFICATIONS

Feature	Detail
Model	B01LYLGNOC
AC Outlets	4 US Plugs (15A/125V/1875W)
USB Ports	2 USB (2.4A Total Max)
Data Ports	1 RJ45, 1 HDMI
Wireless Charger	5W (Qi-compatible)
Required Hole Diameter	4.7 inches ( $\pm 0.5$ inches)
Hidden Length	5.90 inches
Product Dimensions	7.4 x 6.5 x 6.3 inches
Item Weight	1.61 pounds
Voltage	125 Volts

## 9. WARRANTY AND SUPPORT

For warranty information or technical support, please contact Kungfuking customer service through the retailer where the product was purchased. Keep your purchase receipt as proof of purchase.

