

YOOYIST CAL-8B

YOOYIST CAL-8B 8-Channel Commercial Kitchen Timer

Model: CAL-8B | Brand: YOOYIST

INTRODUCTION

The YOOYIST CAL-8B is an 8-channel commercial kitchen timer designed for professional environments such as restaurants, bakeries, catering services, and hotels. It enables simultaneous tracking of multiple cooking tasks, enhancing efficiency and precision in time-sensitive operations. This manual provides detailed instructions for the proper setup, operation, maintenance, and troubleshooting of your timer.

Key features include:

- **8 Independent Channels:** Manage up to eight different tasks concurrently.
- **Loud Alarm:** Ensures alerts are heard in noisy kitchen environments.
- **Durable Construction:** Made from easy-to-clean stainless steel for longevity.
- **Clear LED Display:** Oversized digits for visibility across the kitchen.
- **Memory Function:** Retains last settings after power cycles.
- **Flexible Mounting:** Includes adjustable kickstands for tabletop use and wall-mount capability.

SETUP

Follow these steps to set up your YOOYIST CAL-8B timer:

1. **Unpacking:** Carefully remove the timer from its packaging and inspect for any damage. Retain packaging for future transport or storage.
2. **Placement:** Choose a suitable location in your kitchen. The timer can be placed on a flat surface using its adjustable kickstands or mounted on a wall for optimal visibility.
3. **Power Connection:** Connect the timer to a 110V or 220V AC power outlet using the provided power cord. The timer does not require batteries for operation.

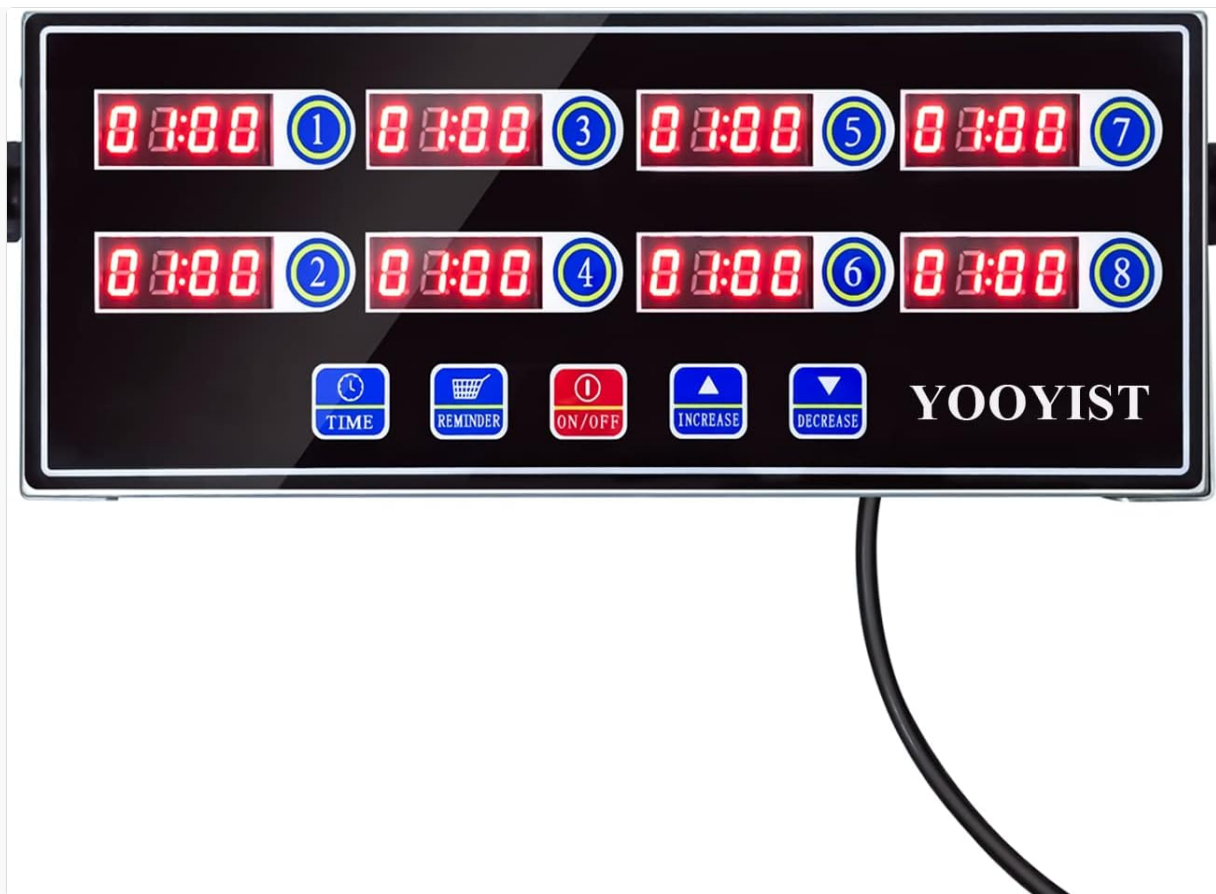


Figure 1: Front view of the YOOYIST CAL-8B 8-Channel Commercial Kitchen Timer.



Figure 2: The timer can be used on a tabletop with its kickstands or mounted on a wall for better visibility.

OPERATING INSTRUCTIONS

The YOOYIST CAL-8B timer features a user-friendly control panel with dedicated buttons for each function.



Figure 3: Close-up of the timer's control panel with 8 displays and function buttons.

Power On/Off

- Press the **ON/OFF** button to turn the timer on or off. When powered on, all eight displays will light up.

Setting a Timer

- Press the **TIME** button. The display for channel 1 will show "End" or its previous setting, indicating it's ready for input.
- Use the **INCREASE** and **DECREASE** buttons to set the desired time for the selected channel.
- Press the **TIME** button again to save the set time.
- To start the countdown for a specific channel, press the corresponding number button (1-8). The timer will begin counting down.

Adjusting Alarm Volume

The timer offers two methods to adjust the alarm volume:

- During Alarm:** When an alarm is ringing, press the **INCREASE** or **DECREASE** button directly to adjust the volume.
- On Standby:** When the timer is on standby (not actively counting down or alarming), press the **INCREASE** or **DECREASE** button to pre-set the alarm volume.



Figure 4: Use the Increase and Decrease buttons to adjust the alarm volume.

Switching Time Modes (Minutes:Seconds / Hours:Minutes)

The timer supports both Minutes:Seconds (N-S) and Hours:Minutes (H-N) modes.

1. Ensure the timer is connected to a power source but not turned on.
2. Long press the **TIME** button. The displays will show "N-S", indicating Minutes:Seconds mode.
3. To switch to Hours:Minutes mode, press the corresponding number key (e.g., '1' for channel 1). The display will change to "H-N".
4. To save this setting, press the **DECREASE** button. The mode will be saved until your next switch.

Using Multiple Timers

Each of the 8 channels operates independently. You can set different times for each channel and start them simultaneously or individually. When a timer is running, long-pressing its corresponding number key will reset it to its original set time, not just pause it.

Memory Function

The timer features a built-in memory function that recalls your last settings instantly, even after a power interruption. This saves time and reduces the chance of errors when managing multiple tasks.



Figure 5: The timer retains settings even after power loss, thanks to its memory function.

Official Instruction Video

Video 1: A detailed demonstration of the YOOYIST 8-channel kitchen timer's functions, including setting alarms, adjusting volume, and switching between time modes.

MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your timer.

- **Cleaning:** The timer is constructed from stainless steel with an easy-to-clean finish. Wipe the surface with a damp cloth and mild detergent. Avoid abrasive cleaners or harsh chemicals that could damage the finish or electronic components.
- **Water Resistance:** The timer is water-resistant, meaning it can withstand splashes. However, it is **not waterproof**. Do not submerge the timer in water or expose it to direct streams of water.
- **Storage:** When not in use for extended periods, store the timer in a cool, dry place away from direct sunlight and extreme temperatures.



Figure 6: The timer's stainless steel casing is designed for easy cleaning and durability in kitchen environments.

TROUBLESHOOTING

If you encounter issues with your YOOYIST CAL-8B timer, refer to the following common solutions:

- **Timer Not Powering On:** Ensure the power cord is securely plugged into both the timer and a functional power outlet. Verify the outlet is receiving power.
- **Alarm Not Audible:** Check the alarm volume settings using the INCREASE/DECREASE buttons as described in the Operating Instructions. Ensure the kitchen environment is not excessively loud, or adjust the timer's placement.
- **Incorrect Time Display:** If the timer displays unexpected characters or behaves erratically, try unplugging it from the power source for a few minutes and then plugging it back in. This can reset the internal system.
- **Settings Not Saving:** Ensure you press the **TIME** button after setting a new time for a channel to save it. For mode changes (Minutes:Seconds/Hours:Minutes), remember to press the **DECREASE** button to save the setting.

SPECIFICATIONS

Feature	Detail
Brand	YOOYIST
Model Number	JSQ05 (CAL-8B)
Material	Stainless Steel
Product Dimensions	1.4"D x 1.77"W x 0.55"H
Item Weight	2.2 pounds (1 Kilogram)
Number of Settings	8 (Channels)
Screen Size	32 Centimeters
Power Source	110V or 220V AC (Plug-in)
UPC	709311825394

WARRANTY AND SUPPORT

For warranty information or technical support, please contact YOOYIST customer service. Refer to the product packaging or the official YOOYIST website for the most current contact details.