

## CKB CT3672-MB

# CKB Corner Shower Enclosure CT3672-MB User Manual

Model: CT3672-MB | Brand: CKB

## INTRODUCTION

This manual provides detailed instructions for the installation, operation, maintenance, and troubleshooting of your CKB Corner Shower Enclosure, model CT3672-MB. Please read this manual thoroughly before beginning installation or use to ensure proper function and safety.



Image: The CKB Corner Shower Enclosure, model CT3672-MB, featuring a matte black frame and grid pattern on tempered glass, installed in a bathroom corner.

## SAFETY INFORMATION

---

Always prioritize safety during installation and use. Failure to follow these instructions could result in injury or damage to the product.

- Wear appropriate personal protective equipment (PPE) including safety glasses and gloves during installation.
- Handle glass panels with extreme care. Tempered glass, while strong, can shatter if struck at the edges.
- Ensure the installation area is level and structurally sound to support the weight of the enclosure.
- Do not overtighten screws, as this can damage components or glass.
- Keep children and pets away from the installation area.
- Consult a professional if you are unsure about any part of the installation process.

## PACKAGE CONTENTS

---

Verify that all components are present and undamaged before beginning installation.

- 1 x Hardware Pack (containing all necessary screws, seals, and small parts)
- 4 x Tempered Glass Panels (1/4 inch / 6mm thickness)
- Illustrated Step-by-Step Instructions
- Aluminum Frame Components

SPECIFICATIONS

Feature	Detail
Model Number	CT3672-MB
Dimensions (L x W x H)	36" x 36" x 72" (914mm x 914mm x 1829mm)
Glass Thickness	1/4 inch (6mm)
Glass Type	ANSI Z97.1 Certified Tempered Glass with Black Grid
Frame Material	Aluminum
Finish	Matte Black
Door Style	Dual Sliding Corner Doors
Special Features	Easy Clean Coating, Quick Release Function, Cushioning Magnetic Design, Out-of-Plumb Adjustment
Item Weight	119 Pounds

# MODEL INFORMATION

## CORNER SHOWER ENCLOSURE

**A:72''(1829mm)**

Model Height

**B:33-7/8''(860mm)**

Model Width

**C:13-1/2''(343mm)**

Fixed Glass

**D:17-7/16''(443mm)**


Door Glass

**E:18-7/8''(479mm)**

Access Width



Matte Black

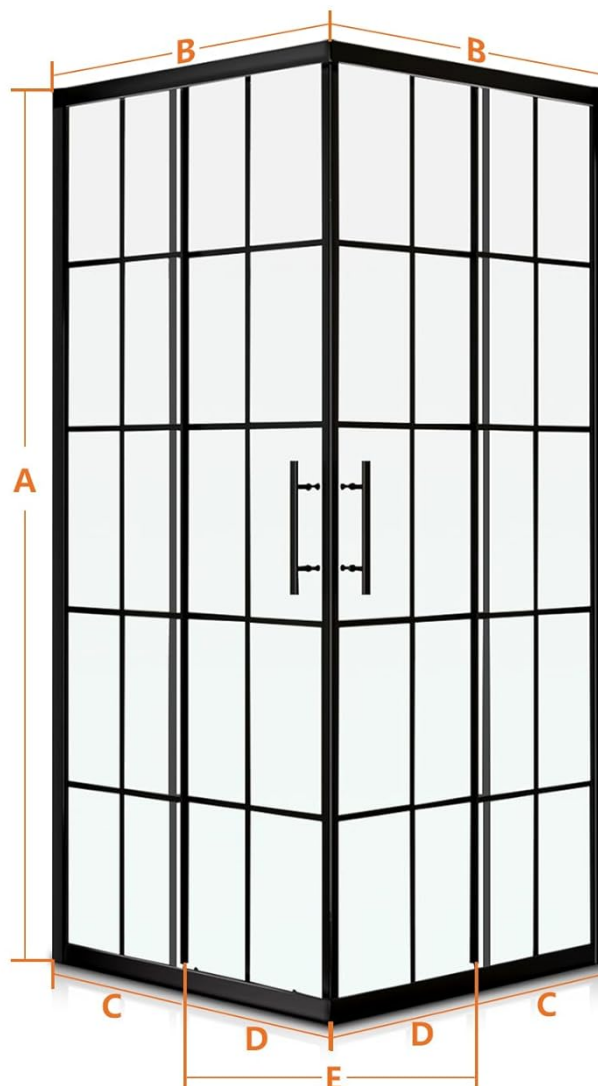

CKB® — CLEAN AND COMFORTABLE

Image: Detailed diagram illustrating the dimensions of the CKB Corner Shower Enclosure, including height, width, fixed glass, door glass, and access width.



Image: Diagram showing the combined dimensions of the CKB Corner Shower Enclosure when paired with a compatible shower base, indicating total height, width, length, and base height.

## SETUP AND INSTALLATION

Installation of the CKB Corner Shower Enclosure requires careful attention to detail. Refer to the included step-by-step instructions for a comprehensive guide. Below are key considerations:

1. **Preparation:** Ensure the shower area walls are finished (tiled, back-walled, etc.) before taking final measurements. The enclosure is designed to fit a 36"x36" shower base.
2. **Wall Adjustments:** The enclosure accommodates 2/3 inch (approximately 17mm) for out-of-plumb installation on uneven walls, allowing for a precise fit without cutting.
3. **Assembly:** Follow the provided illustrated instructions for assembling the frame, installing the glass panels, and attaching the sliding door mechanisms.
4. **Sealing:** Apply silicone sealant as directed in the instructions to ensure a watertight installation.





Image: Close-up view of the adjustable width mechanism, highlighting the 3/8 inch (10 mm) adjustment on each side for out-of-plumb walls.



Image: Diagram illustrating the minimum threshold width requirement of 1 1/4 inches (32mm) for proper installation of the shower enclosure.

## OPERATING INSTRUCTIONS

The CKB Corner Shower Enclosure features dual sliding doors for convenient access.

- **Opening/Closing:** Gently slide the doors along their tracks. Avoid forcing the doors.
- **Cushioning Magnetic Design:** The integrated magnetic strips ensure a secure and quiet closure, absorbing impact and providing a tight waterproof seal.

## MAINTENANCE AND CLEANING

Regular cleaning and maintenance will preserve the appearance and functionality of your shower enclosure.

- **Easy Clean Coating:** The tempered glass features an easy-clean coating that resists water spots, soap scum, and grime, reducing cleaning time. Clean regularly with a soft cloth and mild, non-abrasive cleaner.
- **Quick Release Function:** For thorough cleaning of hard-to-reach areas, utilize the quick-release function on the sliding doors. This allows for easy removal and reinstallation of the door panels.

- **Frame Cleaning:** Wipe the matte black aluminum frame with a soft, damp cloth. Avoid harsh chemicals or abrasive scrubbers that could damage the finish.
- **Inspection:** Periodically check seals and hardware for wear or looseness. Tighten any loose screws as needed.

## GLASS INFORMATION

Glass Shield Coating

Tempered Glass

### ***GlassShield Coating Technology make cleaning effortless***

Our shower doors are coated with the proprietary GlassShield Coating Technology. The coating resists water, soap scum, and grime, helping to reduce cleaning time by up to 90%



**With EASY CLEAN**



**Without EASY CLEAN**



**Safety  
Tempered Glass**



**Normal glass**

**CKIB® — CLEAN AND COMFORTABLE**

Image: Visual explanation of the Glass Shield Coating Technology and the benefits of tempered glass, showing how the easy-clean coating repels water and prevents soap scum buildup.





Image: Close-up view of the quick-release design on the shower door rollers, illustrating how to disengage the rollers for easier cleaning and maintenance.

## TROUBLESHOOTING

This section addresses common issues you might encounter with your shower enclosure.

Problem	Possible Cause	Solution
<b>Doors do not slide smoothly.</b>	Debris in tracks, misaligned rollers, or worn rollers.	Clean tracks thoroughly. Check roller alignment and adjust if necessary. Replace worn rollers if applicable.
<b>Water leakage from enclosure.</b>	Improperly sealed joints, damaged seals, or incorrect installation.	Inspect all silicone seals and reapply if necessary. Check for damaged seals and replace them. Ensure all components are installed according to instructions.

<b>Doors do not close completely.</b>	Misaligned magnetic strips, obstruction in tracks, or out-of-plumb installation.	Check and adjust magnetic strip alignment. Clear any obstructions from the tracks. Verify wall plumbness and adjust the enclosure if possible using the out-of-plumb adjustment feature.
---------------------------------------	--	--

## WARRANTY INFORMATION

For specific warranty terms and conditions, please refer to the documentation provided at the time of purchase or contact CKB customer support. Warranty coverage typically includes manufacturing defects in materials and workmanship for a specified period from the date of purchase.




## CUSTOMER SUPPORT


If you require assistance with installation, parts, or have any questions regarding your CKB Corner Shower Enclosure, please contact CKB customer support. You can often find contact information on the manufacturer's website or through your retailer.

Visit the official CKB Store for more information:[CKB Shower Doors Store](#)

© 2023 CKB. All rights reserved. Information in this manual is subject to change without notice.
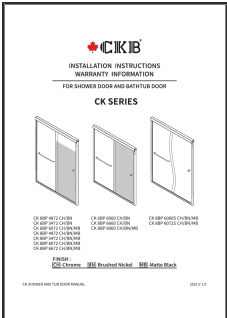
## Related Documents - CT3672-MB

	<p><a href="#">CKB CK Series Shower and Bathtub Door Installation Manual and Warranty Information</a></p> <p>This document provides comprehensive installation instructions, parts lists, and warranty information for the CKB CK Series shower and bathtub doors. It details required tools, step-by-step assembly, and product maintenance guidelines.</p>
	<p><a href="#">CKB SP Series Shower and Tub Door Installation Manual and Warranty Information</a></p> <p>Comprehensive installation instructions and warranty details for the CKB SP Series shower and tub doors. Includes parts list, step-by-step assembly guide, and maintenance information.</p>
	<p><a href="#">NADOLI SK-NA38C-MB Shower Enclosure Assembly Instructions and Warranty</a></p> <p>Detailed assembly instructions and limited warranty information for the NADOLI SK-NA38C-MB shower enclosure. Includes care guidelines and coverage details.</p>

<div><p>TECHNICAL DATA</p><table><tr><th>TYPE</th><th>P20</th><th>P25</th><th>P30</th><th>P35</th><th>P40</th><th>P50</th></tr><tr><td>Heat output (kW)</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>50</td></tr><tr><td>Heat output (Btu/h)</td><td>6800</td><td>8500</td><td>10200</td><td>11900</td><td>13600</td><td>17000</td></tr><tr><td>Efficiency (%)</td><td>85</td><td>85</td><td>85</td><td>85</td><td>85</td><td>85</td></tr><tr><td>Water capacity (L)</td><td>10</td><td>15</td><td>20</td><td>25</td><td>30</td><td>40</td></tr><tr><td>Water capacity (gal)</td><td>2.6</td><td>4.0</td><td>5.3</td><td>6.6</td><td>8.0</td><td>10.6</td></tr><tr><td>Dimensions (mm)</td><td>400x400x1000</td><td>450x450x1000</td><td>500x500x1000</td><td>550x550x1000</td><td>600x600x1000</td><td>700x700x1000</td></tr><tr><td>Dimensions (in)</td><td>15.7x15.7x39.4</td><td>17.7x17.7x39.4</td><td>19.7x19.7x39.4</td><td>21.7x21.7x39.4</td><td>23.6x23.6x39.4</td><td>27.6x27.6x39.4</td></tr><tr><td>Weight (kg)</td><td>15</td><td>20</td><td>25</td><td>30</td><td>35</td><td>45</td></tr><tr><td>Weight (lb)</td><td>33</td><td>44</td><td>55</td><td>66</td><td>77</td><td>99</td></tr><tr><td>Material</td><td>Stainless Steel</td><td>Stainless Steel</td><td>Stainless Steel</td><td>Stainless Steel</td><td>Stainless Steel</td><td>Stainless Steel</td></tr><tr><td>Pressure (bar)</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.0</td><td>1.0</td></tr><tr><td>Pressure (psi)</td><td>14.5</td><td>14.5</td><td>14.5</td><td>14.5</td><td>14.5</td><td>14.5</td></tr><tr><td>Flow rate (L/min)</td><td>10</td><td>15</td><td>20</td><td>25</td><td>30</td><td>40</td></tr><tr><td>Flow rate (gpm)</td><td>2.6</td><td>4.0</td><td>5.3</td><td>6.6</td><td>8.0</td><td>10.6</td></tr><tr><td>Connection</td><td>1/2" NPT</td><td>1/2" NPT</td><td>1/2" NPT</td><td>1/2" NPT</td><td>1/2" NPT</td><td>1/2" NPT</td></tr><tr><td>Installation</td><td>Indoor</td><td>Indoor</td><td>Indoor</td><td>Indoor</td><td>Indoor</td><td>Indoor</td></tr><tr><td>Warranty</td><td>5 years</td><td>5 years</td><td>5 years</td><td>5 years</td><td>5 years</td><td>5 years</td></tr></table></div>	TYPE	P20	P25	P30	P35	P40	P50	Heat output (kW)	20	25	30	35	40	50	Heat output (Btu/h)	6800	8500	10200	11900	13600	17000	Efficiency (%)	85	85	85	85	85	85	Water capacity (L)	10	15	20	25	30	40	Water capacity (gal)	2.6	4.0	5.3	6.6	8.0	10.6	Dimensions (mm)	400x400x1000	450x450x1000	500x500x1000	550x550x1000	600x600x1000	700x700x1000	Dimensions (in)	15.7x15.7x39.4	17.7x17.7x39.4	19.7x19.7x39.4	21.7x21.7x39.4	23.6x23.6x39.4	27.6x27.6x39.4	Weight (kg)	15	20	25	30	35	45	Weight (lb)	33	44	55	66	77	99	Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Pressure (bar)	1.0	1.0	1.0	1.0	1.0	1.0	Pressure (psi)	14.5	14.5	14.5	14.5	14.5	14.5	Flow rate (L/min)	10	15	20	25	30	40	Flow rate (gpm)	2.6	4.0	5.3	6.6	8.0	10.6	Connection	1/2" NPT	1/2" NPT	1/2" NPT	1/2" NPT	1/2" NPT	1/2" NPT	Installation	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Warranty	5 years	5 years	5 years	5 years	5 years	5 years	<p><a href="#">Centrometal EKO-CKB P Series Wood Pellet Boilers - Technical Specifications and Diagrams</a></p> <p>Comprehensive technical data, dimensions, and component descriptions for the Centrometal EKO-CKB P series of wood pellet boilers, including models P20, P25, P30, P35, P40, and P50. Features include heat output, fuel specifications, dimensions, and connection details.</p>
TYPE	P20	P25	P30	P35	P40	P50																																																																																																																									
Heat output (kW)	20	25	30	35	40	50																																																																																																																									
Heat output (Btu/h)	6800	8500	10200	11900	13600	17000																																																																																																																									
Efficiency (%)	85	85	85	85	85	85																																																																																																																									
Water capacity (L)	10	15	20	25	30	40																																																																																																																									
Water capacity (gal)	2.6	4.0	5.3	6.6	8.0	10.6																																																																																																																									
Dimensions (mm)	400x400x1000	450x450x1000	500x500x1000	550x550x1000	600x600x1000	700x700x1000																																																																																																																									
Dimensions (in)	15.7x15.7x39.4	17.7x17.7x39.4	19.7x19.7x39.4	21.7x21.7x39.4	23.6x23.6x39.4	27.6x27.6x39.4																																																																																																																									
Weight (kg)	15	20	25	30	35	45																																																																																																																									
Weight (lb)	33	44	55	66	77	99																																																																																																																									
Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel																																																																																																																									
Pressure (bar)	1.0	1.0	1.0	1.0	1.0	1.0																																																																																																																									
Pressure (psi)	14.5	14.5	14.5	14.5	14.5	14.5																																																																																																																									
Flow rate (L/min)	10	15	20	25	30	40																																																																																																																									
Flow rate (gpm)	2.6	4.0	5.3	6.6	8.0	10.6																																																																																																																									
Connection	1/2" NPT	1/2" NPT	1/2" NPT	1/2" NPT	1/2" NPT	1/2" NPT																																																																																																																									
Installation	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor																																																																																																																									
Warranty	5 years	5 years	5 years	5 years	5 years	5 years																																																																																																																									
<div><p><b>Nadoli</b> SK-DR36BK-MB 36" x 36" Round Sliding Shower Door Kit Ensemble de douche ronde à porte coulissante 36" x 36"</p></div>	<p><a href="#">Nadoli SK-DR36BK-MB 36" x 36" Round Sliding Shower Door Kit Installation Guide</a></p> <p>Comprehensive installation guide for the Nadoli SK-DR36BK-MB 36" x 36" Round Sliding Shower Door Kit. Includes parts list, required tools, step-by-step assembly instructions, and warranty information.</p>																																																																																																																														