

[Manuals.plus](#) /

> [Kircuit](#) /

> User Manual: Kircuit 24V AC/DC Adapter

Kircuit LH-560 Compatible Adapter

User Manual: Kircuit 24V AC/DC Adapter

Compatible with L+H2 LH-560 Bluetooth Wireless Thermal Shipping Label Printer

INTRODUCTION

This manual provides essential information for the safe and effective use of your Kircuit 24V AC/DC Adapter. This power supply is specifically designed to be compatible with the L+H2 LH-560 Bluetooth Wireless Thermal Shipping Label Printer, ensuring reliable power delivery for optimal performance. Please read this manual thoroughly before use and retain it for future reference.

SAFETY INFORMATION

To prevent injury or damage to the product, please observe the following safety precautions:

- Use only with compatible devices as specified in this manual.
- Do not expose the adapter to water, moisture, or extreme temperatures.
- Avoid dropping or subjecting the adapter to strong impacts.
- Do not disassemble or attempt to repair the adapter. Refer all servicing to qualified personnel.
- Ensure the power outlet voltage matches the adapter's input voltage (100V-240V AC).
- Unplug the adapter from the power outlet when not in use for extended periods.
- Keep out of reach of children.

PACKAGE CONTENTS

Verify that all items are present in the package:

- 1 x Kircuit 24V AC/DC Power Adapter
- 1 x AC Power Cord



Image: The Kircuit 24V AC/DC Adapter shown with its detachable AC power cord. The adapter is a black rectangular unit, and the cords are coiled neatly.

SETUP

Follow these steps to set up your Kircuit 24V AC/DC Adapter:

1. **Connect the AC Power Cord:** Insert the two-prong connector of the AC power cord firmly into the input port on the Kircuit 24V AC/DC Adapter.
2. **Connect to Device:** Insert the barrel plug connector of the adapter's output cable into the power input port of your L+H2 LH-560 Bluetooth Wireless Thermal Shipping Label Printer. Ensure a secure connection.
3. **Plug into Power Outlet:** Insert the two-prong plug of the AC power cord into a standard 100V-240V AC wall outlet.
4. **Verify Power:** Once connected, the adapter may have an indicator light (if present) to show it is receiving power. Your label printer should now be ready for operation.



Image: The Kircuit 24V AC/DC Adapter is shown connected to a wall outlet, illustrating a typical setup scenario on a desk.

OPERATING INSTRUCTIONS

The Kircuit 24V AC/DC Adapter functions as a dedicated power supply for compatible devices. Once properly connected, it continuously provides the necessary voltage and current to operate your L+H2 LH-560 Bluetooth Wireless Thermal Shipping Label Printer.

- Ensure all connections are secure before powering on your device.
- The adapter is designed for continuous operation within its specified limits.
- Disconnect the adapter from the wall outlet and the device when not in use or during electrical storms.

MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your adapter:

- **Cleaning:** Disconnect the adapter from all power sources before cleaning. Use a soft, dry cloth to wipe the exterior.

Do not use liquid cleaners or aerosols.

- **Storage:** Store the adapter in a cool, dry place away from direct sunlight and extreme temperatures. Avoid tightly coiling the cables to prevent damage.
- **Inspection:** Periodically inspect the adapter and cables for any signs of damage, such as frayed wires, bent pins, or cracks in the casing. If damage is found, discontinue use immediately.

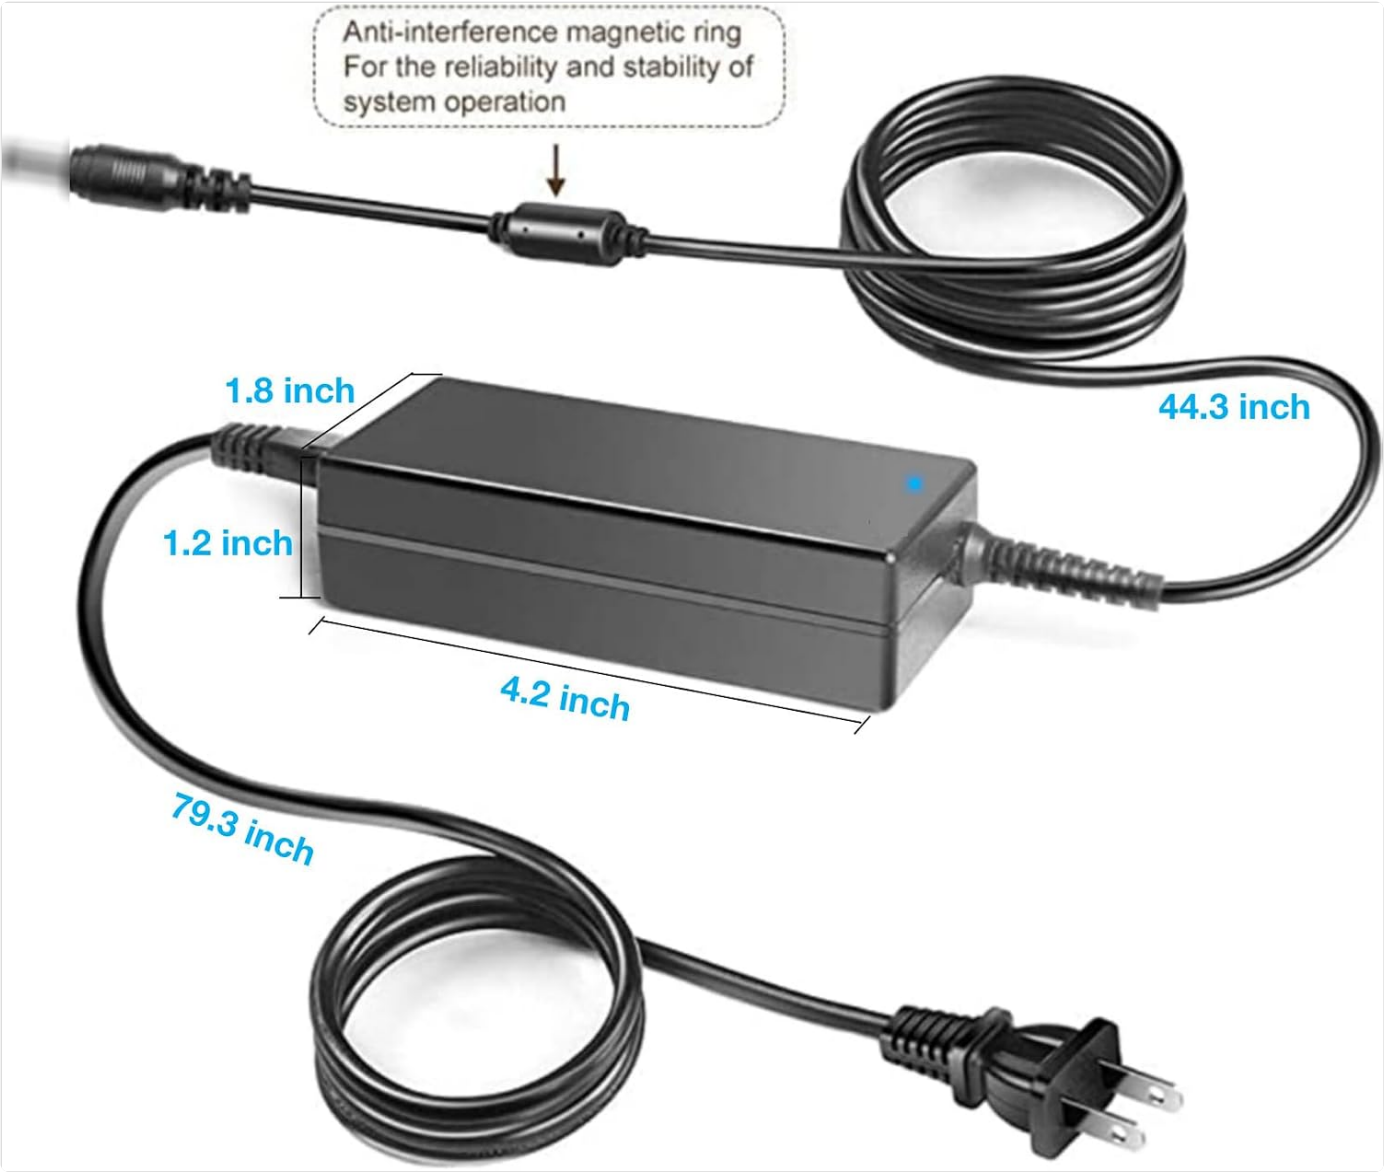


Image: Detailed view of the Kircuit 24V AC/DC Adapter, highlighting its dimensions and the anti-interference magnetic ring on the output cable for stable operation.

TROUBLESHOOTING

If you encounter issues with your Kircuit 24V AC/DC Adapter, refer to the following common problems and solutions:

Problem		Possible Cause	Solution
No power to device	Adapter not plugged in; loose connection; faulty outlet; damaged adapter.	Ensure adapter is securely plugged into wall and device. Try a different outlet. Inspect adapter and cables for damage.	

Problem		Possible Cause	Solution
Device not charging/powering on	Incorrect adapter for device; device issue.	Verify the adapter is compatible with your specific device model (L+H2 LH-560). Test the device with another known-good power source if possible.	
Adapter feels hot	Normal operation; excessive load; poor ventilation.	A slight warmth is normal. Ensure adequate ventilation around the adapter. If it's excessively hot or emitting smoke/smell, unplug immediately and discontinue use.	

SPECIFICATIONS

Kircuit 24V AC/DC Adapter	
Brand	Kircuit
Input Voltage	100V-240V AC
Output Voltage	24V DC
Compatibility	L+H2 LH-560 LH560 LH 560 Bluetooth Wireless Thermal Shipping Label Printer
Connector Type	Barrel Plug
Special Feature	Built-in Dynamic IC, Charger IC & Power fuse for rapid charging and over charge protection.
Color	Black

WARRANTY AND SUPPORT

This Kircuit product is backed by a standard warranty. For specific warranty terms and conditions, please refer to the product packaging or contact your retailer.

For technical support or inquiries, please contact the manufacturer or your point of purchase. Please have your product model number and purchase details ready when contacting support.

Manufacturer: Shenzhen Waweis Technology Co., Ltd

Brand: Kircuit

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0CH3HB273>

More documents and user manuals: **<https://manuals.plus/>**