

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [WALI](#) /

> [WALI M001LP Laptop and Monitor Mount Instruction Manual](#)

## WALI M001LP

# WALI M001LP Laptop and Monitor Mount

## INSTRUCTION MANUAL

Model: M001LP

### Introduction

---

Thank you for choosing the WALI M001LP Laptop and Monitor Mount. This product is designed to provide an ergonomic and flexible solution for mounting your laptop and monitor, optimizing your workspace. This manual provides detailed instructions for safe installation, operation, and maintenance of your mount. Please read this manual thoroughly before installation and keep it for future reference.

### Safety Information

---

- **Weight Capacity:** Do not exceed the maximum weight capacity of 22 lbs (10 kg) per arm. Exceeding this limit may result in serious injury or product damage.
- **Desk Thickness:** Ensure your desk meets the minimum and maximum thickness requirements for the chosen installation method (C-clamp or grommet base).
- **VESA Compatibility:** Verify that your monitor is VESA compatible (75x75mm or 100x100mm) before installation.
- **Assembly:** Assemble the product exactly as instructed. Improper assembly can lead to damage or injury.
- **Moving Parts:** Be cautious of pinch points when adjusting the mount.
- **Children:** Keep small parts away from children as they may pose a choking hazard.
- **Tools:** Use appropriate tools for installation.

### Package Contents

---

Please verify that all parts are present and undamaged before assembly. If any parts are missing or damaged, please contact WALI customer service.

- 1x WALI Extra High Desk Mount for Monitor with Laptop Tray (Black)
- 1x Mounting Hardware Kit
- 1x User Manual

## Specifications


<b>Brand</b>	WALI
<b>Model Number</b>	M001LP
<b>Color</b>	Black
<b>Material</b>	Metal
<b>Mounting Type</b>	Table Mount (C-clamp or Grommet)
<b>Movement Type</b>	Articulating
<b>Compatible Laptop Size</b>	Up to 17 inches
<b>Compatible Monitor Size</b>	Up to 27 inches
<b>Weight Capacity</b>	22 lbs (10 kg) per arm
<b>VESA Compatibility</b>	75x75mm, 100x100mm
<b>Laptop Tray Dimensions</b>	14 x 11 inches (L x W) with 0.6 inch (1.5 cm) bottom lip
<b>Pole Height</b>	16 inches (40 cm)
<b>C-clamp Desk Thickness</b>	0.4 - 4 inches (1 - 10.2 cm)
<b>Grommet Base Desk Thickness</b>	0.4 - 3 inches (1 - 7.6 cm) for 4 inch (10.2 cm) hole diameter
<b>Monitor Arm Tilt</b>	+/-90 degrees
<b>Monitor Arm Swivel</b>	360 degrees
<b>Monitor Arm Rotation</b>	360 degrees (Landscape to Portrait)
<b>Laptop Tray Tilt</b>	+/-15 degrees

The mount features a ventilated laptop tray to prevent overheating and a 0.6-inch (1.5 cm) bottom lip to secure your laptop.

# Display Compatibility



Weight Capacity  
**22lbs Per Arm**



Screen Size  
**MAX 17"**



Screen Size  
**MAX 27"**



VESA Size  
**75 x 75mm**  
**100 x 100mm**



Image: Display Compatibility - Max 22lbs per arm, Max 17" laptop, Max 27" monitor, VESA 75x75mm & 100x100mm.

# Product Dimension

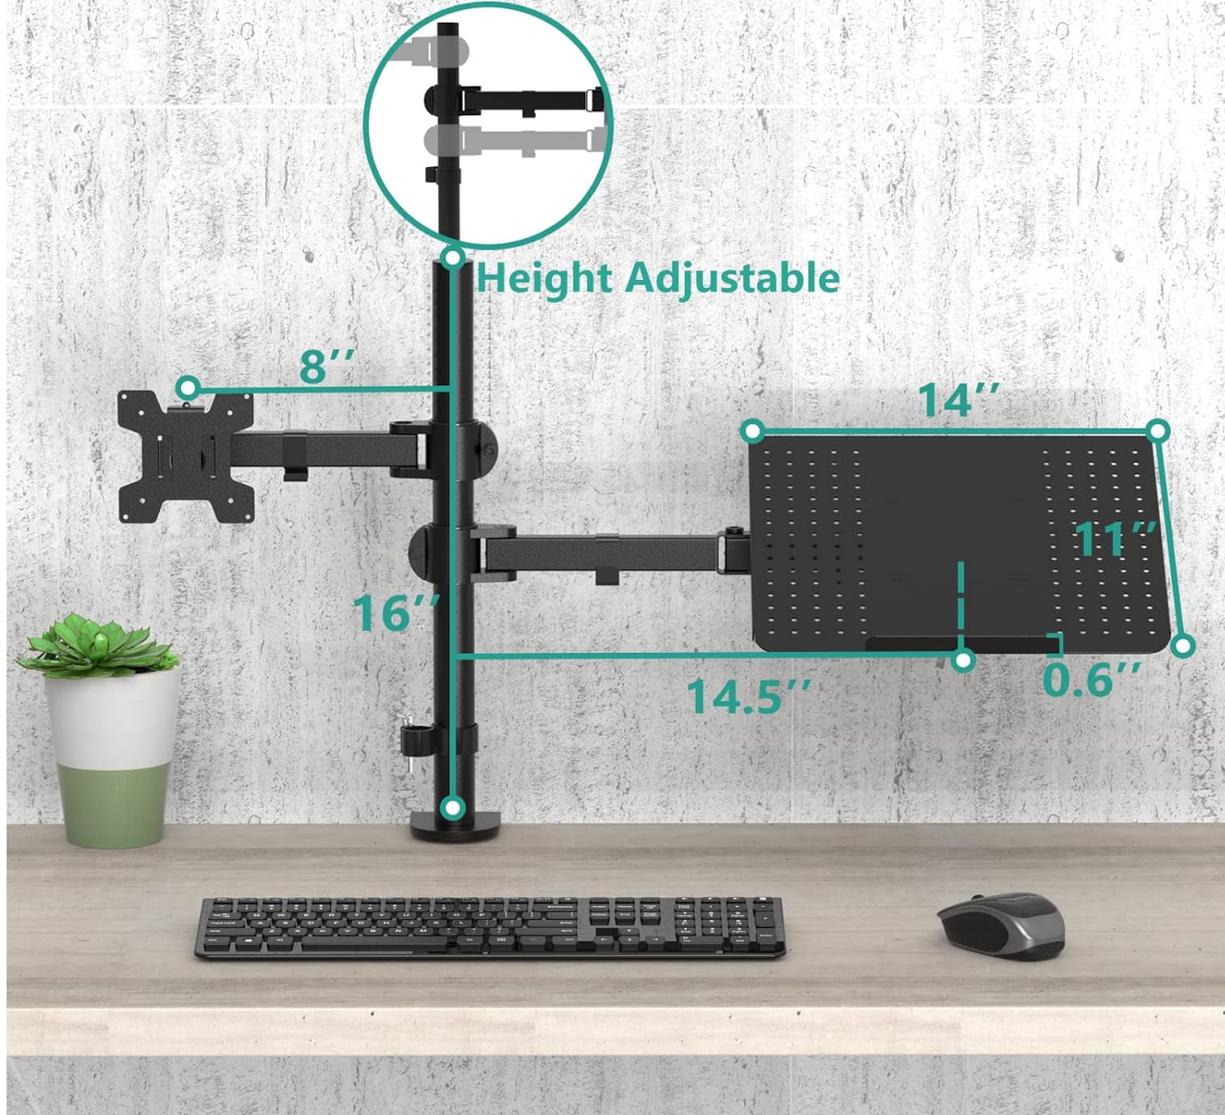


Image: Product Dimensions - Illustrates the 16-inch pole height and arm extensions.

## Setup and Installation

The WALI M001LP mount offers two installation options: C-clamp and Grommet Base. Choose the method best suited for your desk.

### 1. C-clamp Installation

- Attach the C-clamp to the bottom of the main pole.
- Position the C-clamp on the edge of your desk.
- Tighten the C-clamp screw until the mount is securely fastened to the desk. Ensure the desk thickness is between 0.4 and 4 inches (1-10.2 cm).

### 2. Grommet Base Installation

- If your desk has a grommet hole, remove the grommet cover.
- Insert the grommet base through the hole.
- Secure the grommet base from underneath the desk using the provided hardware. Ensure the desk thickness is between 0.4 and 3 inches (1-7.6 cm) and the hole diameter is up to 4 inches (10.2 cm).

### 3. Attaching Arms and Devices

- Slide the monitor arm and laptop tray arm onto the main pole. Adjust their height as desired and secure them with the provided screws.
- **For Monitor:** Attach the VESA plate to the back of your monitor using the appropriate screws. Then, slide the monitor with the attached VESA plate onto the monitor arm.
- **For Laptop:** Place your laptop onto the laptop tray. The 0.6-inch (1.5 cm) bottom lip will help secure it.

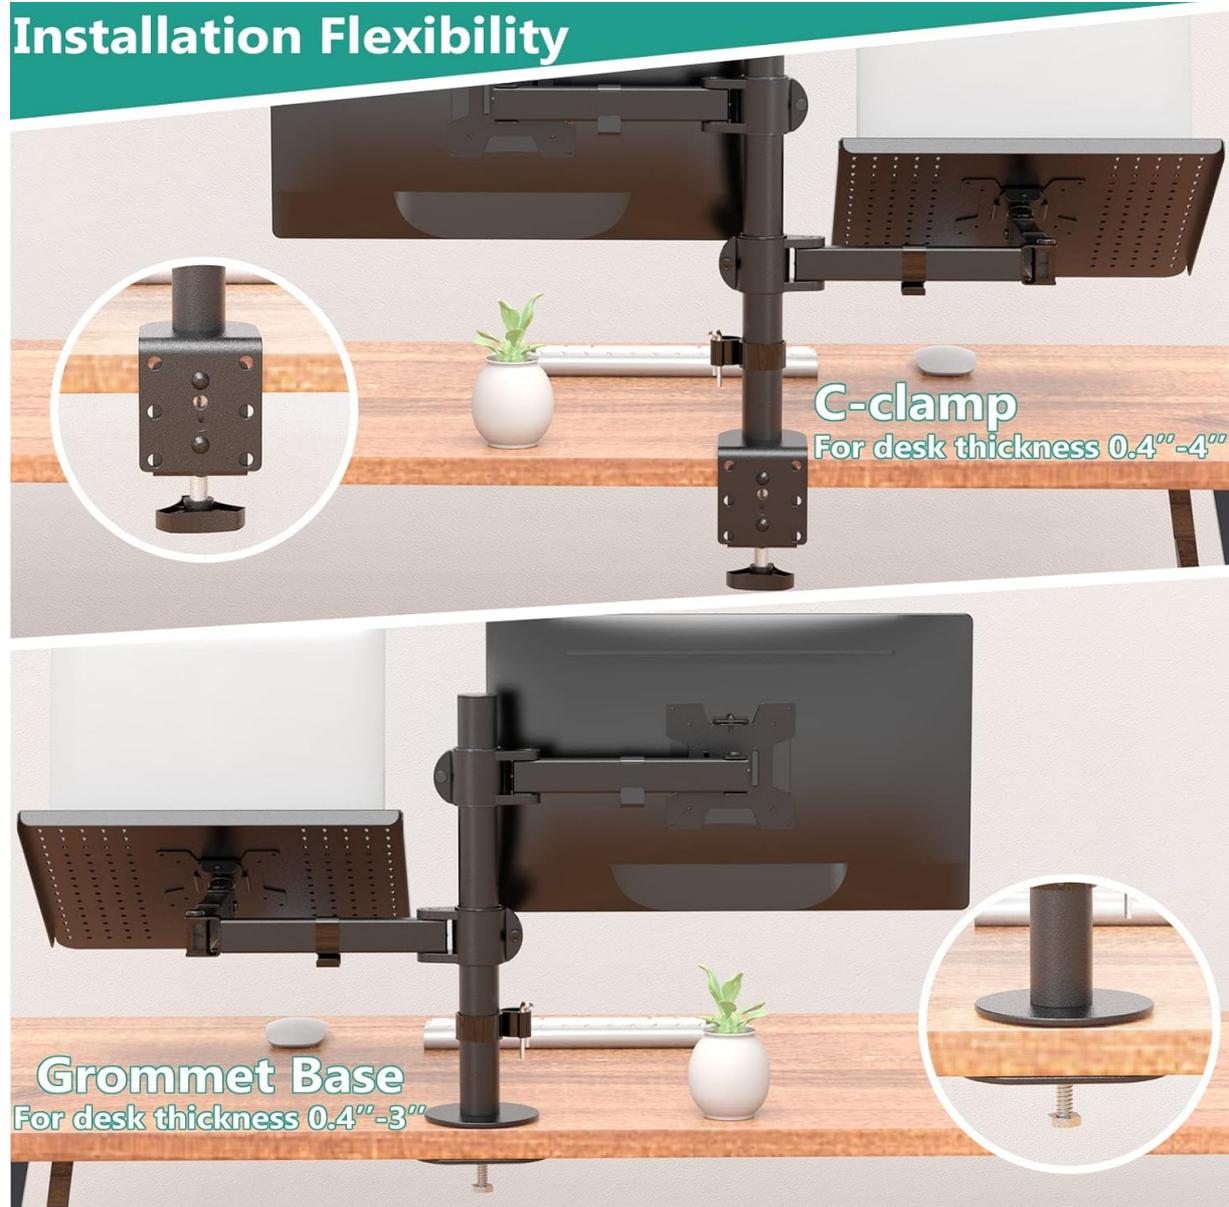


Image: Installation Flexibility - C-clamp for desk thickness 0.4"-4", Grommet Base for desk thickness 0.4"-3".

### 4. Cable Management

Utilize the integrated cable management clips along the arms and pole to route your cables neatly. This helps maintain a clean and organized workspace.

# Clean Cable Management



Image: Clean Cable Management - Cables are routed through clips on the mount for an organized desk.

## Operating and Adjustments

The WALI M001LP mount offers multiple adjustment points for optimal viewing comfort.

- **Height Adjustment:** Loosen the screws on the arms to slide them up or down the 16-inch (40 cm) pole to achieve your desired height. Retighten securely.
- **Monitor Arm Tilt:** The monitor arm can tilt +/-90 degrees to reduce glare and optimize viewing angles.
- **Monitor Arm Swivel:** Swivel the monitor arm 360 degrees at various joints to share your screen or change viewing direction.
- **Monitor Arm Rotation:** Rotate your monitor 360 degrees to switch between landscape and portrait orientation.
- **Laptop Tray Tilt:** The laptop tray can be tilted +/-15 degrees for ergonomic typing or viewing.

Adjustments should be made smoothly. If an adjustment feels too loose or too stiff, check the tension screws on the joints and tighten or loosen them as needed.

# Angle Adjustment



Image: Angle Adjustment - Shows 180-degree swivel, +/-15-degree laptop tilt, and ventilated tray.

## Maintenance

- **Cleaning:** Wipe the mount with a soft, damp cloth. Avoid using abrasive cleaners or solvents that could damage the finish.
- **Periodic Checks:** Periodically check all screws and connections to ensure they remain tight and secure. Retighten if necessary.
- **Lubrication:** No lubrication is typically required for the moving parts. If any joints become stiff, ensure they are clean and free of debris.

## Troubleshooting

- **Mount is unstable:** Ensure the C-clamp or grommet base is securely tightened to the desk. Check that all arm connections to the pole are tight. Verify that the combined weight of your devices does not exceed the 22 lbs (10 kg) per arm capacity.
- **Monitor/Laptop sags or won't stay in position:** Tighten the tension screws on the relevant arm joints. These screws control the friction and holding power of the tilt and swivel mechanisms.
- **Difficulty adjusting arms:** Loosen the tension screws slightly on the stiff joints. Ensure no cables are snagged or obstructing movement.

- **Laptop slides off the tray:** Ensure the laptop is placed correctly against the bottom lip of the tray. If the tray is tilted significantly, ensure the laptop's weight distribution is balanced.

## Warranty and Support

---

WALI is committed to providing quality products and customer satisfaction. While specific warranty details are not provided in this manual, WALI offers experienced and friendly US-based customer service available 7 days a week to assist you with any questions or issues you may encounter.

For support, please refer to the contact information provided with your product packaging or visit the official WALI website.