

HOIGY HYBF-06H-G

HOIGY HYBF-06H-G Vessel Sink Faucet Instruction Manual

Model: HYBF-06H-G | Brand: HOIGY

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your HOIGY HYBF-06H-G Vessel Sink Faucet. Please read this manual thoroughly before installation and keep it for future reference. This faucet features a patented design, a brushed gold finish, and a waterfall spout for a modern bathroom aesthetic. It is designed for single-hole vessel sinks.

INCLUDED COMPONENTS

Verify that all components are present before beginning installation:

- Bathroom Faucet
- Pre-installed Water Supply Hoses (29" long, PEX inner layer)
- Pop Up Drain (PP food-grade material)
- Instruction Manual (this document)
- Installation Hardware (including metal gasket and nut)

SAFETY INFORMATION

- Always turn off the main water supply before beginning any plumbing work.
- Wear appropriate personal protective equipment, such as safety glasses and gloves.
- Ensure all connections are secure to prevent leaks. Do not overtighten connections, as this can cause damage.
- The faucet body is made of lead-free brass, complying with US standards for safety.
- The pre-installed hoses have a PEX inner layer to avoid leakage and comply with US standards.

SETUP AND INSTALLATION

This faucet is designed for easy DIY installation, typically completed in 2 steps within 5 minutes, without requiring a plumber or extra tools. It is compatible ONLY with 1-hole vessel sinks or above-counter basins. The mounting basin hole size should be 1.06"

- 1.5" in diameter, and the counter thickness up to 2".

1. Faucet Installation

Before starting, ensure all pre-installed water hoses are tightened. If not, tighten them clockwise. Unscrew the metal nut from the screw, then tighten the short thread of the screw to the faucet. Place the rubber O-ring under the faucet.



500,000 OPEN & CLOSE OPERATION


Stable and avoid leakage

- **Lead-free Solid Brass**
Stable & durable
- **Pre-installed Water Hoses**
No need to manually screw
- **Food Grade PEX Inner**
Anti rust & benefit
- **Ceramic Valve Core**
No leakage & long service life

Figure 1: Faucet dimensions and compatibility with 1-hole vessel basins. Note the required mounting hole diameter and counter thickness.

VESSEL FAUCET INSTALLATION STEP

No experience, no plumber, no extra tools, no extra costs required

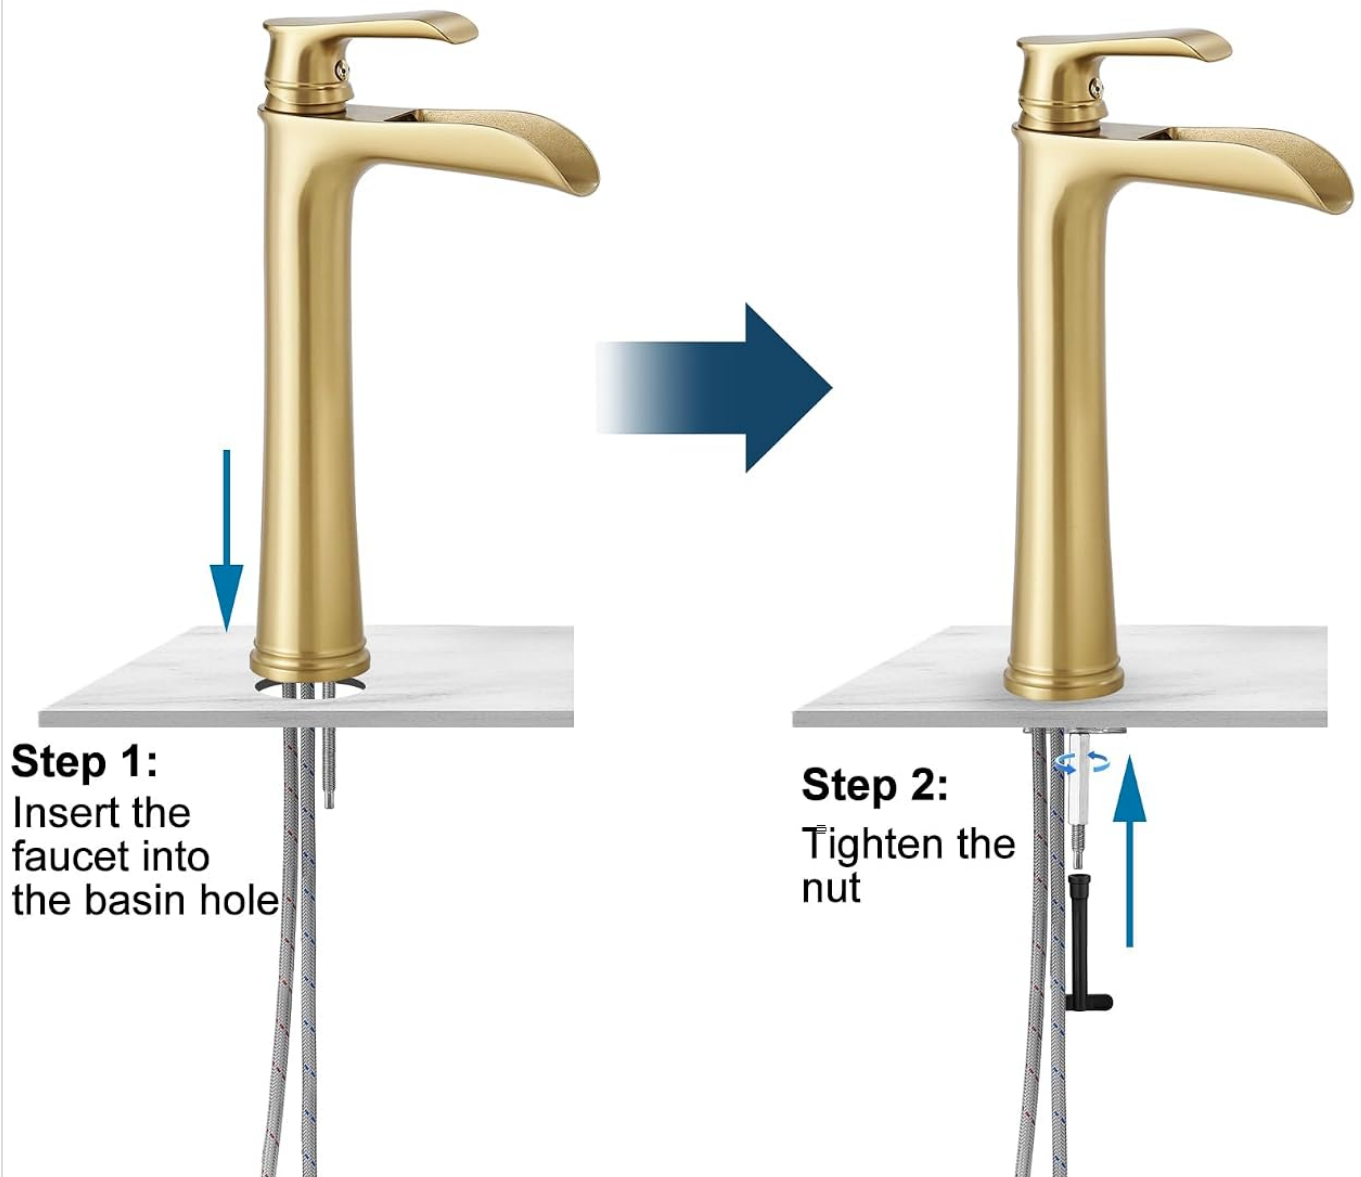

Compliant with US Standards

Figure 2: Step-by-step faucet installation. Step 1: Insert the faucet into the basin hole. Step 2: Tighten the nut from underneath the counter.

Step 1: Insert the faucet into the basin hole. Ensure the handle is closed during this step.

Step 2: From underneath the counter, place the metal gasket through the screw, then thread the metal nut onto the screw. Use the provided wrench to tighten the metal nut securely. Avoid overtightening.

Your browser does not support the video tag.

Video 1: Detailed installation guide for the HOIGY Vessel Waterfall Bathroom Faucet. This video demonstrates the 5-minute installation process.

2. Pop-Up Drain Installation

The included PP food-grade material pop-up drain can be installed on drain holes with a diameter of 1.6" - 1.9" and a thickness of 1.2" - 2.4".

Equipping Pop-Up Drain

Made of food grade PP material, benefit and durable

Corrosion Resistant



- Press without Jamming
- Anti-clogging Design
- No Leaks & No Water Spots



Figure 3: The pop-up drain features a corrosion-resistant, anti-clogging design that prevents small items from falling down and ensures no leaks or water spots.

Your browser does not support the video tag.

Video 2: Step-by-step instructions for installing the pop-up drain.

After installing the faucet and drain, open the hot and cold water valves to flush out any sewage before connecting the supply hoses to the faucet. Connect the pre-installed supply hoses to the correct angle valves. Ensure connections are hand-tight, then use a wrench for a final snug turn, avoiding excessive force to prevent damage.

OPERATING INSTRUCTIONS

The HOIGY HYBF-06H-G faucet features a single lever handle for easy control of water flow and temperature.



Figure 4: The single lever handle allows for flexible adjustment of water flow and temperature. Hot and cold indicators are present for convenience.

- **Water Flow:** Lift the handle upwards to increase water flow. Push it downwards to decrease or stop the flow.
- **Temperature Control:** Move the handle to the left for hot water and to the right for cold water. The single handle allows for precise mixing to achieve your desired temperature.
- The extra-wide, half-open spout creates a gentle waterfall effect, reducing noise and splashing.
- A built-in pressure reducer helps save water without compromising performance.

Your browser does not support the video tag.

Video 3: Demonstration of the 3-layer filter spout providing silent and splash-free waterfall flow.

MAINTENANCE

Proper care and cleaning will ensure the longevity and appearance of your HOIGY faucet.

- **Cleaning:** The faucet's upgraded finish is corrosion-resistant, rust-resistant, and fingerprint-resistant. Clean the surface 2 to 3 times a week. Use only water and dry with a soft cloth.
- **Avoid Harsh Cleaners:** Do not use acidic detergents, abrasive cleaners, or harsh chemicals, as these can damage the finish.
- **Pop-Up Drain:** The pop-up drain features an anti-clogging design. Periodically remove the stopper and clean any accumulated debris to maintain optimal drainage.

TROUBLESHOOTING

If you encounter any issues with your faucet, refer to the following common solutions:

- **Low Water Flow:** Check if the water supply valves are fully open. Inspect the aerator (3-layer metal filter) in the spout for any debris or mineral buildup and clean if necessary.
- **Leaks:** Ensure all connections, especially the supply hoses and the mounting nut, are securely tightened. Do not overtighten. If leaks persist, check the rubber O-rings and gaskets for proper seating or damage. The built-in ceramic cartridge is designed for over 500,000 anti-leakage operations.
- **Water Temperature Issues:** Verify that both hot and cold water supply lines are connected correctly to the angle valves.
- **Drain Clogging:** Remove the pop-up drain stopper and clear any hair or debris that may have accumulated.

SPECIFICATIONS

Feature	Detail
Brand	HOIGY
Model Name	HYBF-06H-G
Material	Lead-free Brass, Metal
Finish Type	Brushed Gold-Noble
Number of Handles	1 (Single Lever)
Hole Count	1
Installation Method	Deck Mount (Vessel Sink)

Flow Rate	1.8 Gallons Per Minute
Valve Type	Ceramic Cartridge Valve
Spout Height	8.46 Inches
Spout Reach	4.92 Inches
Item Dimensions (D x W x H)	5.5"D x 2.06"W x 11"H
Hose Length	29 Inches (Pre-installed)
Mounting Hole Diameter	1.06" - 1.5" (for basin)
Counter Thickness	Max 2"
Pop-Up Drain Hole Size	1.6" - 1.9" diameter
Pop-Up Drain Thickness	1.2" - 2.4"

WARRANTY AND SUPPORT

HOIGY offers a lifetime limited warranty for this product. For any questions, technical assistance, or warranty claims, please contact HOIGY customer support through the retailer where the product was purchased or visit the official HOIGY website.
Note: Please retain your proof of purchase for warranty purposes.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

