Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

VANPET 2Pcs 3/8" Barb Sprayer Wand

VANPET 29-Inch Stainless Steel Sprayer Wand with 3/8-inch Brass Barb

Model: 2Pcs 3/8" Barb Sprayer Wand

Introduction

This manual provides instructions for the proper assembly, operation, and maintenance of your VANPET 29-inch Stainless Steel Sprayer Wand. This universal replacement wand is designed for durability and ease of use with most 3/8-inch hoses. Please read this manual thoroughly before use to ensure safe and efficient operation.



Figure 1: VANPET 29-Inch Stainless Steel Sprayer Wand

Product Features

- **Durable Construction:** The sprayer wand is constructed from stainless steel tubing with a high-quality rubber handle, ensuring longevity and resistance to wear.
- **3/8-inch Brass Barb:** Features a robust brass barb connection, designed to fit most standard 3/8-inch hoses securely, offering superior durability compared to plastic alternatives.
- **Lockable Hand Lever:** Equipped with a locking mechanism on the handle, allowing for continuous spraying without constant pressure, which helps reduce hand fatigue during extended use.
- **Adjustable Nozzle:** The nozzle can be rotated to easily adjust the spray pattern from a fine mist to a direct stream, accommodating various spraying needs.

Package Contents

Verify that all components are present before proceeding with assembly:

- Sprayer Wand (Stainless Steel)
- Sprayer Handle with Shut-off Valve (Rubber/Plastic with Brass Barb)
- Adjustable Nozzle Tip
- Hose Clamps (Quantity: 1 or 2, depending on package)



Figure 2: Sprayer Wand Components

Setup Instructions

1. **Connect the Wand to the Handle:** Ensure the rubber gasket is properly seated inside the wand's connection point. Screw the stainless steel wand onto the sprayer handle until it is hand-tight.
2. **Attach the Nozzle:** Screw the adjustable nozzle tip onto the end of the stainless steel wand. Tighten securely.
3. **Connect to Hose:** Cut your existing sprayer hose to the desired length. Slide a hose clamp onto the hose. Insert the brass barb of the sprayer handle into the hose. Position the hose clamp over the barb and tighten it securely to prevent leaks.



Figure 3: Assembled Sprayer Wand Length Options

Operating Instructions

1. **Activate Spray:** Squeeze the hand lever on the sprayer handle to begin spraying.
2. **Adjust Spray Pattern:** Rotate the nozzle tip clockwise or counter-clockwise to change the spray pattern. Turning it one way will produce a fine mist, while turning it the other way will create a direct, concentrated stream.
3. **Lock for Continuous Spray:** To engage continuous spraying, squeeze the hand lever fully and then push down the orange locking mechanism located near the pivot point of the lever. This will hold the lever in the open position, reducing hand fatigue. To release, simply squeeze the lever again.



Figure 4: Adjusting Spray Pattern



Figure 5: Lockable Hand Lever Operation

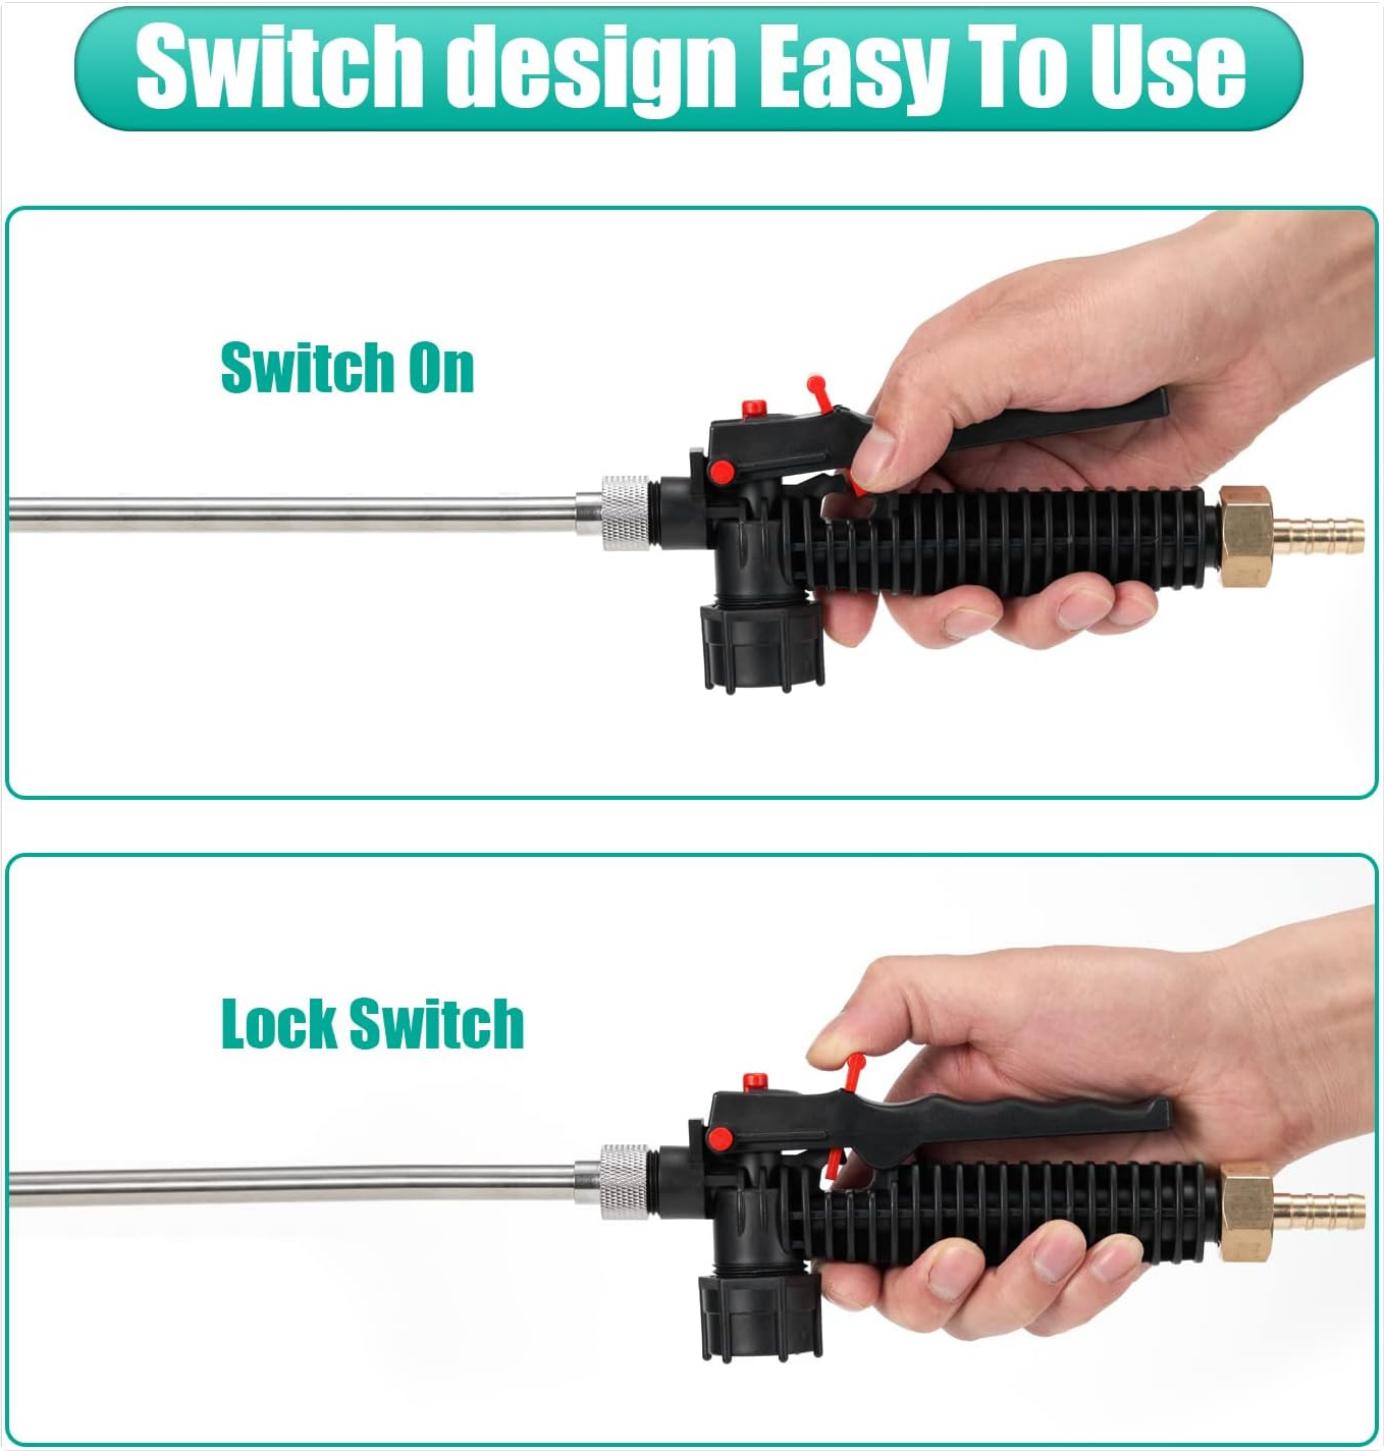


Figure 6: Example of Fine Mist Spray

Maintenance

- **Cleaning:** After each use, flush the sprayer wand with clean water to remove any chemical residues. This prevents clogging and corrosion.
- **Nozzle Care:** If the nozzle becomes clogged, unscrew it and clean any debris from the opening. Ensure the internal gasket is intact and properly seated before reattaching.
- **Storage:** Store the sprayer wand in a clean, dry place. During freezing temperatures, ensure all water is drained from the wand and hose to prevent damage. Consider using RV antifreeze if storing in sub-zero conditions.
- **Inspection:** Periodically inspect the hose connections, barb, and nozzle for any signs of wear, damage, or leaks. Replace worn components as needed.

Troubleshooting

- **No Spray or Weak Spray:**
  - Check for clogs in the nozzle or wand. Clean as described in Maintenance.
  - Ensure the hose is not kinked or blocked.
  - Verify adequate pressure from the sprayer pump.
- **Leaks:**
  - Tighten all connections (wand to handle, nozzle to wand, hose clamp).
  - Inspect gaskets and O-rings for damage or improper seating. Replace if necessary.
  - Check the hose for cracks or punctures.
- **Difficulty Adjusting Spray Pattern:**
  - Clean the nozzle tip thoroughly to remove any hardened residue.

Specifications

Feature	Detail
Brand	VANPET
Model Number	2Pcs 3/8" Barb Sprayer Wand
Material	Stainless Steel, Brass, Rubber
Item Dimensions (L x W x H)	29 x 4 x 1.5 inches
Item Weight	14 ounces
Inlet Connection Size	0.38 Inches
Inlet Connection Type	Barb
Outlet Connection Type	Barb
Number of Ports	2
UPC	768447077626

Warranty and Support

For warranty information or technical support, please refer to the product packaging or contact VANPET customer service directly. Keep your purchase receipt for warranty claims.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CJQZMY76

More documents and user manuals: **https://manuals.plus/**