Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

khtumeware 3-3/4 inch hole center 10 Pack Brushed Brass

khtumeware Cabinet Pulls Instruction Manual

Model: 3-3/4 inch hole center 10 Pack Brushed Brass

Introduction

The khtumeware Brushed Brass Cabinet Pulls are designed to enhance the aesthetic and functionality of your cabinets, wardrobes, cupboards, drawers, and doors. Crafted from durable zinc alloy with a brushed brass finish, these pulls offer a modern and elegant touch to any home decor. This manual provides essential information for installation, usage, and maintenance to ensure optimal performance and longevity of your cabinet pulls.



Image: A pair of khtumeware brushed brass cabinet pulls, highlighting their design and finish.

Product Features

- **Material:** Constructed from high-quality zinc alloy with a brushed brass exterior finish, ensuring durability and resistance to wear.
- **Design:** Modern, sleek design suitable for various interior styles, including kitchens, bathrooms, and furniture.
- **Versatile Application:** Ideal for cabinets, wardrobes, cupboards, drawers, and doors, allowing for home upgrades and DIY projects.
- **Easy Installation:** Designed for straightforward installation with included hardware.

Setup and Installation

Proper installation ensures the stability and longevity of your cabinet pulls. Follow these steps carefully:

1. **Prepare Tools:** Gather necessary tools including a measuring tape, pencil, drill, drill bits (appropriate for screw size and material), and a screwdriver.
2. **Measure and Mark:** Determine the desired location for the pull on your cabinet door or drawer. Use a measuring tape to mark the two hole centers precisely. For this model, the center-to-center spacing is 3-3/4 inches (96mm).
3. **Drill Pilot Holes:** Carefully drill pilot holes at the marked locations. Ensure the drill bit size is slightly smaller than the screw diameter to allow the screws to thread securely without splitting the wood.
4. **Attach Pull:** Align the cabinet pull with the drilled holes. Insert the provided screws from the inside of the cabinet door/drawer through the pilot holes and into the pull.
5. **Secure Screws:** Use a screwdriver to tighten the screws until the pull is firmly attached. Avoid over-tightening, which can strip the screw threads or damage the cabinet material.

Included Hardware: The pulls come with two sets of screws: 1 inch (25mm) and 1.5 inches (38mm). These are suitable for cabinet thicknesses ranging from 0.7 inches to 1.4 inches (18mm to 34mm).

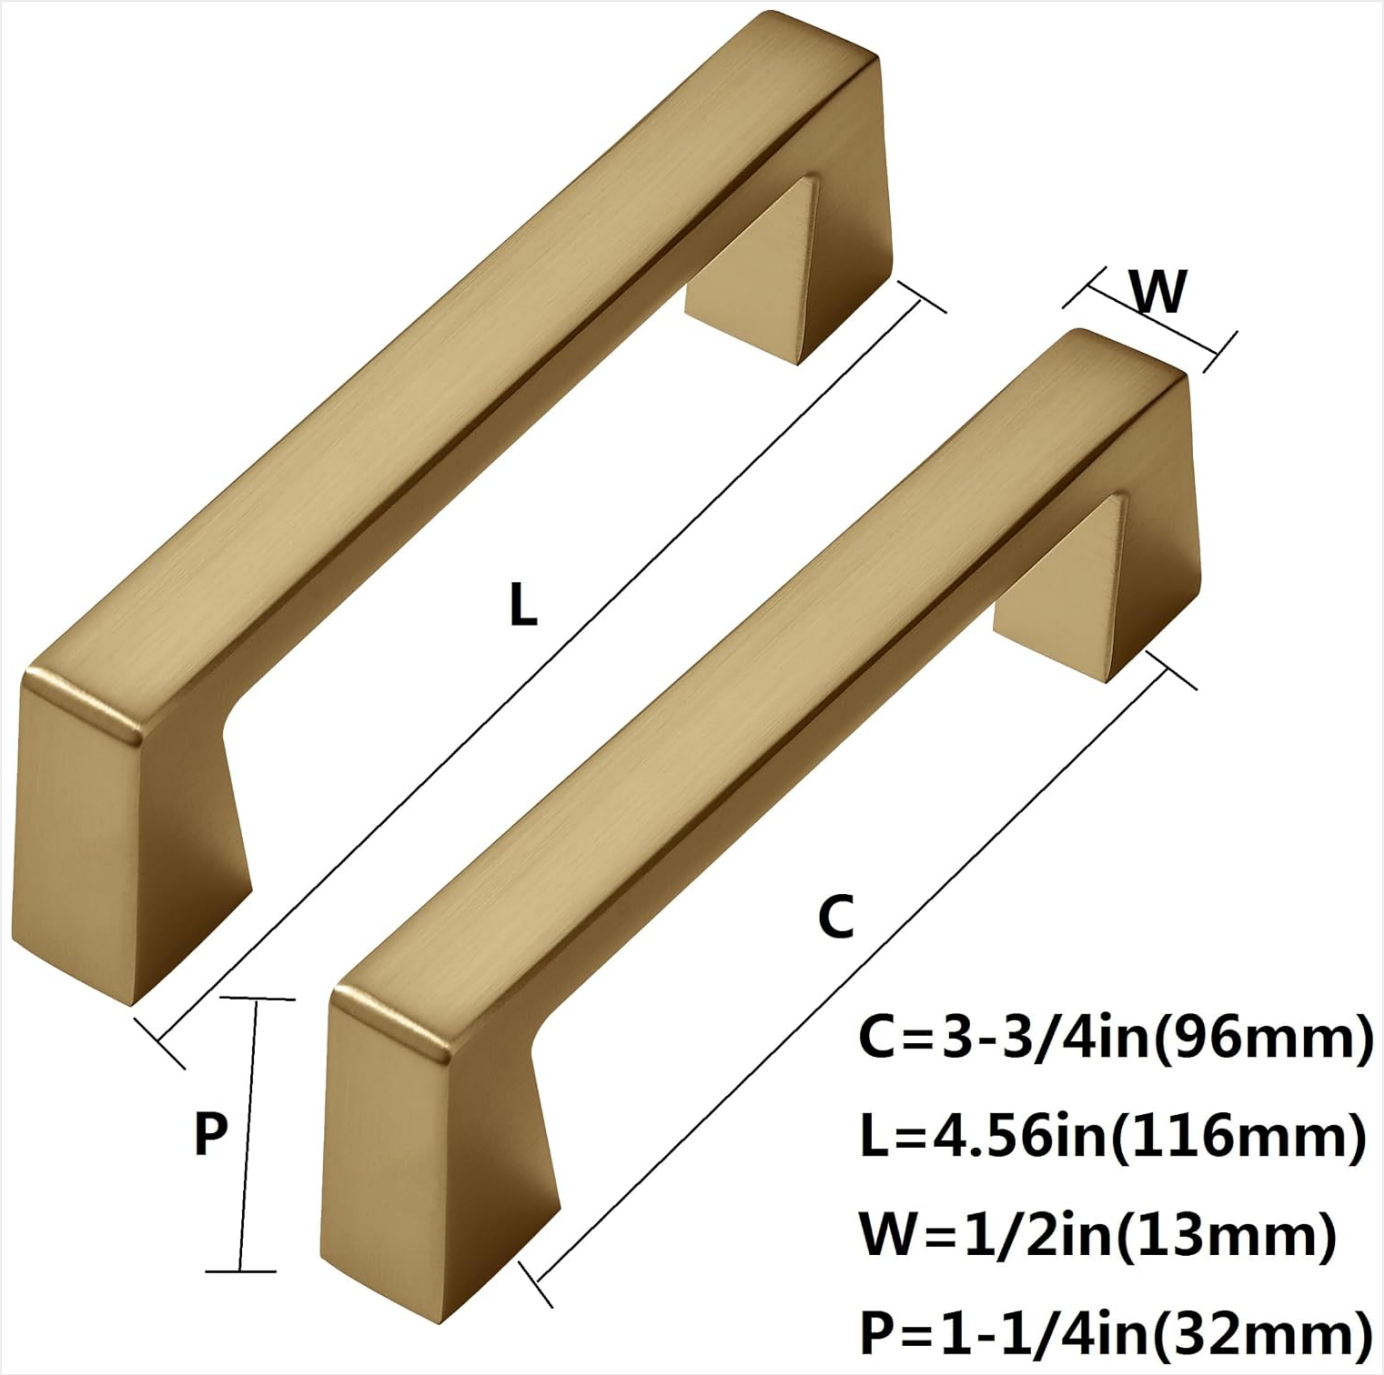


Image: Detailed dimensions of the cabinet pull, crucial for accurate installation.

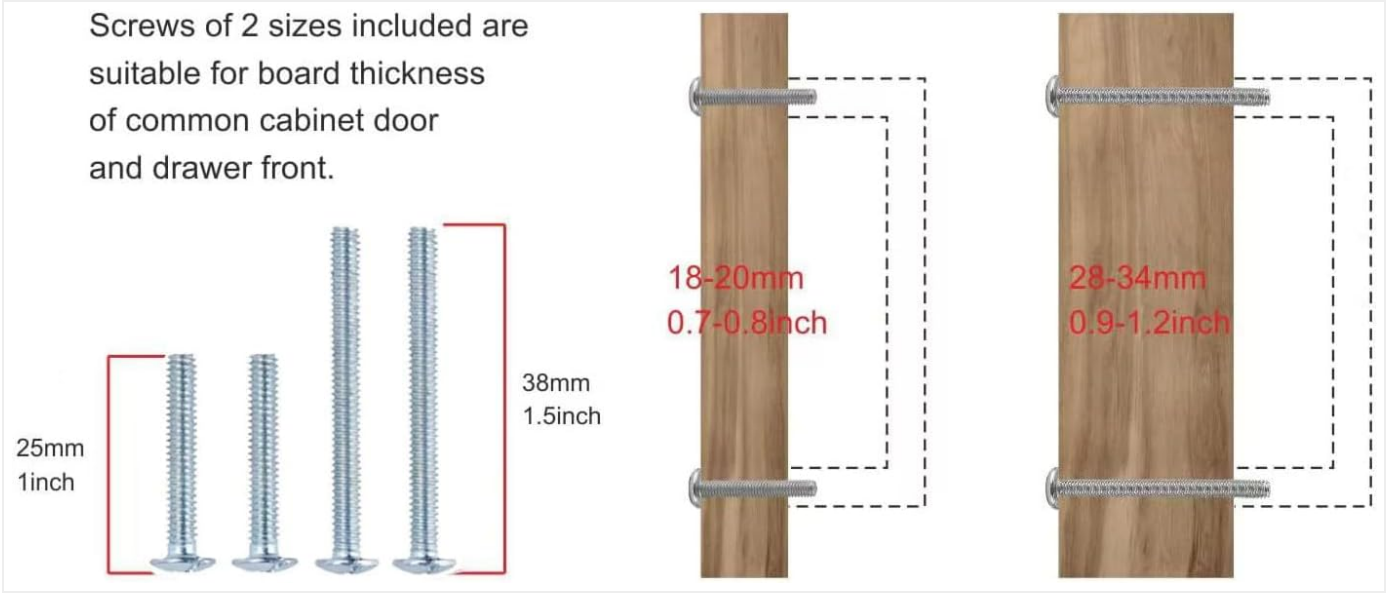


Image: Guide to screw lengths and compatible cabinet thicknesses.

Operating Instructions

Once installed, the khtumeware cabinet pulls are ready for immediate use. Simply grasp the pull firmly and apply gentle, consistent pressure to open or close your cabinet doors and drawers. The ergonomic design ensures a comfortable grip and smooth operation.



Image: Cabinet pulls in use on kitchen cabinetry.

Maintenance and Care

To maintain the appearance and functionality of your khtumeware cabinet pulls, follow these simple care guidelines:

- **Cleaning:** Wipe the pulls regularly with a soft, damp cloth to remove dust and fingerprints. For more stubborn marks, a mild soap solution can be used, followed by drying with a clean, soft cloth.
- **Avoid Harsh Chemicals:** Do not use abrasive cleaners, ammonia-based products, or harsh chemicals, as these can damage the brushed brass finish.
- **Periodic Inspection:** Periodically check the tightness of the screws. If a pull feels loose, gently tighten the screws with a screwdriver to ensure it remains secure.

Troubleshooting

Problem	Possible Cause	Solution
Pull feels loose or wobbly.	Screws have loosened over time.	Tighten the mounting screws from the inside of the cabinet door/drawer using a screwdriver. Do not over-tighten.
Pull cannot be installed securely.	Incorrect screw length for cabinet thickness; pilot holes are too large or misaligned.	Ensure you are using the correct screw length (1 inch or 1.5 inch) for your cabinet thickness. Verify pilot hole size and alignment. If holes are too large, consider using wood filler and re-drilling, or using larger screws if appropriate.
Finish appears dull or stained.	Accumulation of dirt, grime, or residue from harsh cleaners.	Clean the pull with a soft, damp cloth and mild soap solution. Dry immediately with a clean, soft cloth. Avoid abrasive or chemical cleaners.

Specifications

Attribute	Detail
Model Name	khtumeware Cabinet Pulls
Product ASIN	B0CJXCBKKW
Color	Brushed Brass
Material	Zinc Alloy, Brass
Center-to-Center Spacing	3-3/4 inches (96mm)
Overall Length	4.4 inches (112mm)
Width	1/2 inch (13mm)
Projection	1-1/4 inches (32mm)
Included Screws	1 inch (25mm) and 1.5 inches (38mm)
Compatible Cabinet Thickness	0.7 inches - 1.4 inches (18mm - 34mm)
Unit Count	10 pulls per pack
Item Weight	3.14 pounds (for 10 pulls)

Support

khtumeware is committed to providing high-quality products and excellent user experience. If you encounter any issues with your cabinet pulls or have questions not covered in this manual, please contact khtumeware customer support through the retailer's platform where the product was purchased. We are confident in the quality of our products and are here to assist you.
For more information or to explore other khtumeware products, visit the official khtumeware Store.

© 2025 khtumeware. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CJXCBKKW

More documents and user manuals: **https://manuals.plus/**