

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

EVOLVE EvoP-BF

EVOLVE Barn & Fence: Swift Shield Paint User Manual

Model: EvoP-BF

PRODUCT OVERVIEW

EVOLVE Swift Shield High Durability and Scratch-Resistant Paint is specifically formulated for revitalizing and protecting outdoor structures such as storage sheds, outbuildings, and fences. This water-based acrylic latex paint offers enhanced durability, a scratch-resistant flat sheen finish, and fast-drying properties. It is designed to be livestock safe and provides excellent wood protection against wear and tear.

Available in multiple colors and sizes, this paint is suitable for exterior wood surfaces, providing a waterproof and long-lasting coating.

SETUP AND PREPARATION

Proper surface preparation is crucial for optimal adhesion and longevity of the paint. Ensure the surface is clean, dry, and free from loose paint, dirt, grease, or mildew.

- Surface Cleaning:** Clean the surface thoroughly with a suitable cleaner. Rinse well and allow to dry completely.
- Repair:** Fill any cracks or holes with appropriate wood filler and sand smooth.
- Priming:** While EVOLVE Swift Shield offers excellent hide, a primer may be beneficial for unpainted, porous, or severely weathered wood surfaces to ensure uniform finish and adhesion.
- Environmental Conditions:** Apply paint when air and surface temperatures are between 50°F (10°C) and 90°F (32°C). Avoid painting in direct sunlight or when rain is expected within 24 hours.
- Tools:** Gather necessary tools including brushes (nylon/polyester), rollers (3/8" nap for smooth surfaces, 1/2" or 3/4" for rougher surfaces), paint trays, stir sticks, drop cloths, and painter's tape.
- Mixing:** Stir the paint thoroughly before and during application to ensure color uniformity and proper consistency. Do not thin the paint unless specified for spray application.



**INTERIOR &
EXTERIOR**



FLAT FINISH



UV RESISTANT



EXCELLENT HIDE



**PROTECTS
WOOD**



**LOW VOC &
LOW ODOR**



Image: Key features of EVOLVE Swift Shield paint, including its suitability for interior and exterior use, UV resistance, wood protection, flat finish, excellent hide, and low VOC/odor.

OPERATING INSTRUCTIONS (APPLICATION)

EVOLVE Swift Shield paint can be applied using a brush, roller, or sprayer.

- First Coat:** Apply a uniform first coat. For best results, work in small sections, applying the paint evenly.
- Drying Time:** The paint features fast-dry technology. Allow approximately 2-4 hours for the first coat to dry to the touch, depending on temperature and humidity.
- Second Coat:** A second coat is recommended for enhanced durability and color depth. Apply the second coat after

the first coat has dried completely, typically within 4-6 hours.

4. **Coverage:** Expect coverage of approximately 300-400 sq ft per gallon, though this may vary based on surface porosity and application method.
5. **Cleanup:** Clean tools and equipment with warm, soapy water immediately after use.



Image: An example of a barn painted with EVOLVE Swift Shield paint, demonstrating the flat sheen finish.



Image: A storage shed painted with EVOLVE Swift Shield paint, showcasing its application on outbuildings.

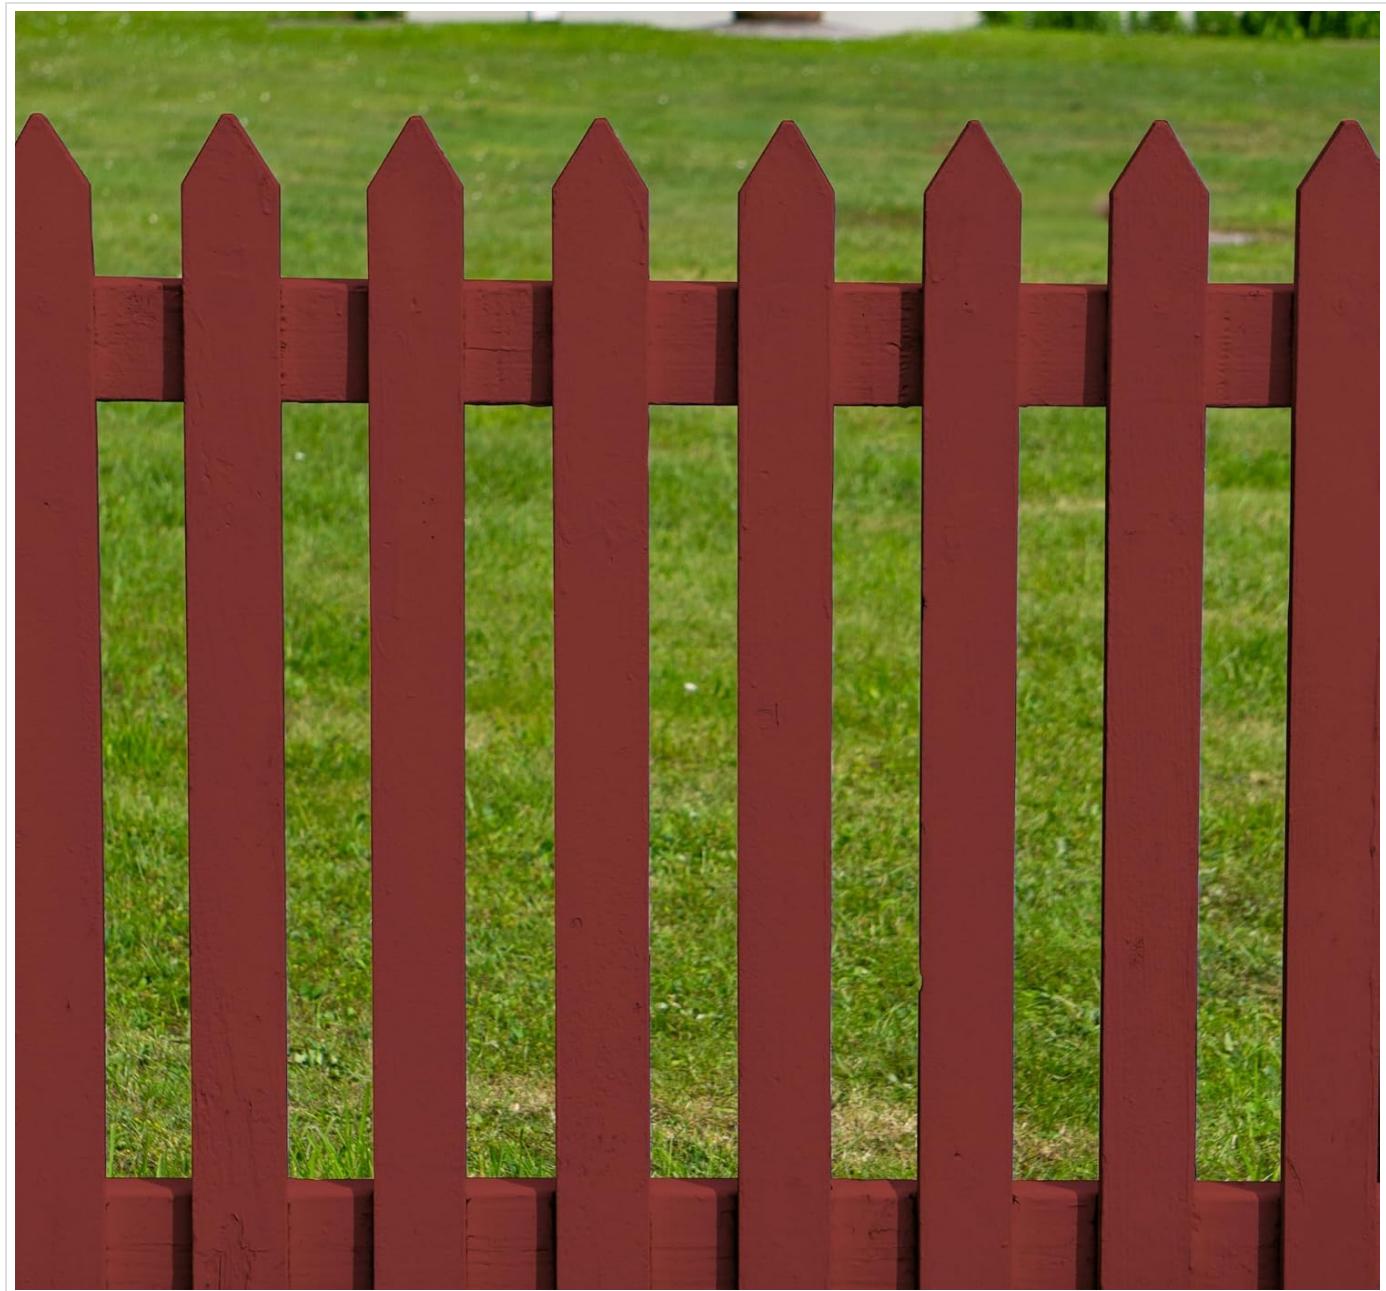


Image: A fence painted with EVOLVE Swift Shield paint, illustrating its use on fences.

MAINTENANCE

Maintaining your painted surfaces will ensure their longevity and appearance.

- **Cleaning:** The scratch-resistant surface is designed for effortless maintenance. For general cleaning, gently wash the painted surface with mild soap and water. Avoid abrasive cleaners or harsh scrubbing.
- **Storage:** Store unused paint in a cool, dry place, away from direct sunlight and freezing temperatures. Ensure the lid is tightly sealed to prevent drying.
- **Touch-ups:** For minor scratches or wear, clean the affected area and apply a small amount of paint with a brush, blending it with the surrounding area.

TROUBLESHOOTING

Here are some common issues and their potential solutions:

Issue	Possible Cause	Solution
-------	----------------	----------

Issue	Possible Cause	Solution
Uneven Coverage / Streaks	Insufficient stirring, improper application technique, or highly porous surface.	Ensure paint is thoroughly stirred. Apply paint evenly, avoiding overspreading. Consider a primer for very porous surfaces or apply an additional thin coat.
Paint Peeling / Flaking	Poor surface preparation (dirt, grease, loose paint), moisture issues, or application over incompatible coatings.	Scrape off loose paint, clean and dry the surface completely. Ensure proper ventilation and address any moisture sources.
Color Appears Different	Lighting conditions, underlying surface color, or paint not fully mixed.	Ensure paint is thoroughly mixed. Allow paint to fully dry as color may deepen. Test a small, inconspicuous area first. Note that digital representations of color may vary.
Slow Drying Time	High humidity, low temperatures, or excessively thick application.	Ensure proper ventilation. Apply paint in recommended temperature and humidity ranges. Apply thinner, even coats.

SPECIFICATIONS

Attribute	Detail
Brand	EVOLVE
Model Number	EvoP-BF
Color (Current Product)	Red
Finish Type	Flat
Size (Current Product)	640 Fl Oz (5 Gallons)
Paint Type	Acrylic Latex
Specific Uses For Product	Exterior
Surface Recommendation	Wood
Special Feature	Scratch Resistant
Is Waterproof	True
Coverage	300-400 sq ft / gallon
Manufacturer	GDB International, INC.
Country of Origin	USA

EVOLVE BARN & FENCE COLORS



WHITE



BARN RED



HUNTER GREEN



BLACK

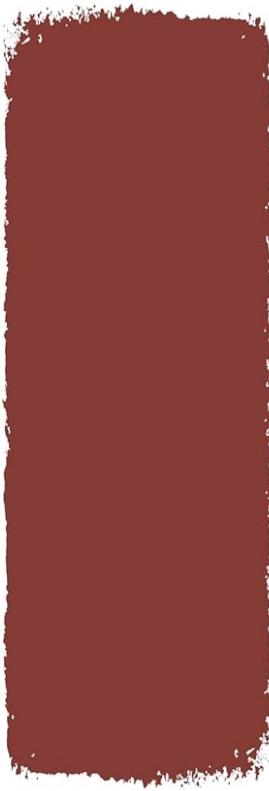


Image: EVOLVE Barn & Fence paint is available in White, Barn Red, Hunter Green, and Black, in various sizes.

WARRANTY AND SUPPORT

For specific warranty information and product support, please refer to the manufacturer's official documentation or contact EVOLVE directly. You can also visit the official EVOLVE store for more information:

[Visit the EVOLVE Store](#)