

Saved from manuals.plus.

Open the live page for links to other documents and user manuals.

[Manuals.plus](#) /

› [Mount-It!](#) /

› Mount-It! Dual Monitor Wall Mount MI-766 Instruction Manual

Mount-It! MI766

Mount-It! Dual Monitor Wall Mount MI-766 Instruction Manual

Model: MI-766

1. INTRODUCTION

This manual provides comprehensive instructions for the installation, operation, and maintenance of your Mount-It! Dual Monitor Wall Mount (Model MI-766). This product is designed to securely mount two computer monitors to a wall, offering full motion adjustability for an ergonomic viewing experience. Please read this manual thoroughly before installation and retain it for future reference.



Image 1.1: Overview of the Mount-It! Dual Monitor Wall Mount.

2. PRODUCT FEATURES

- **VESA Compatibility:** Supports monitors with 75x75mm and 100x100mm VESA patterns.
- **Monitor Size and Weight:** Accommodates screens from 13 to 27 inches, with a maximum weight capacity of 14.3 lbs per arm.
- **Full Motion Articulating Arms:** Features gas spring mechanisms for smooth vertical adjustments.
- **Adjustability:** Offers 90 degrees of tilt, 90 degrees of swivel, and 180 degrees of rotation for optimal viewing angles.
- **Portrait and Landscape Viewing:** Easily switch between orientations with 180-degree rotation.
- **Integrated Cable Management:** Helps organize and conceal cables for a tidy workspace.
- **Easy Installation:** Slide-in VESA plate design for quick and straightforward monitor attachment.



Image 2.1: Supported monitor sizes and weight capacity per arm.

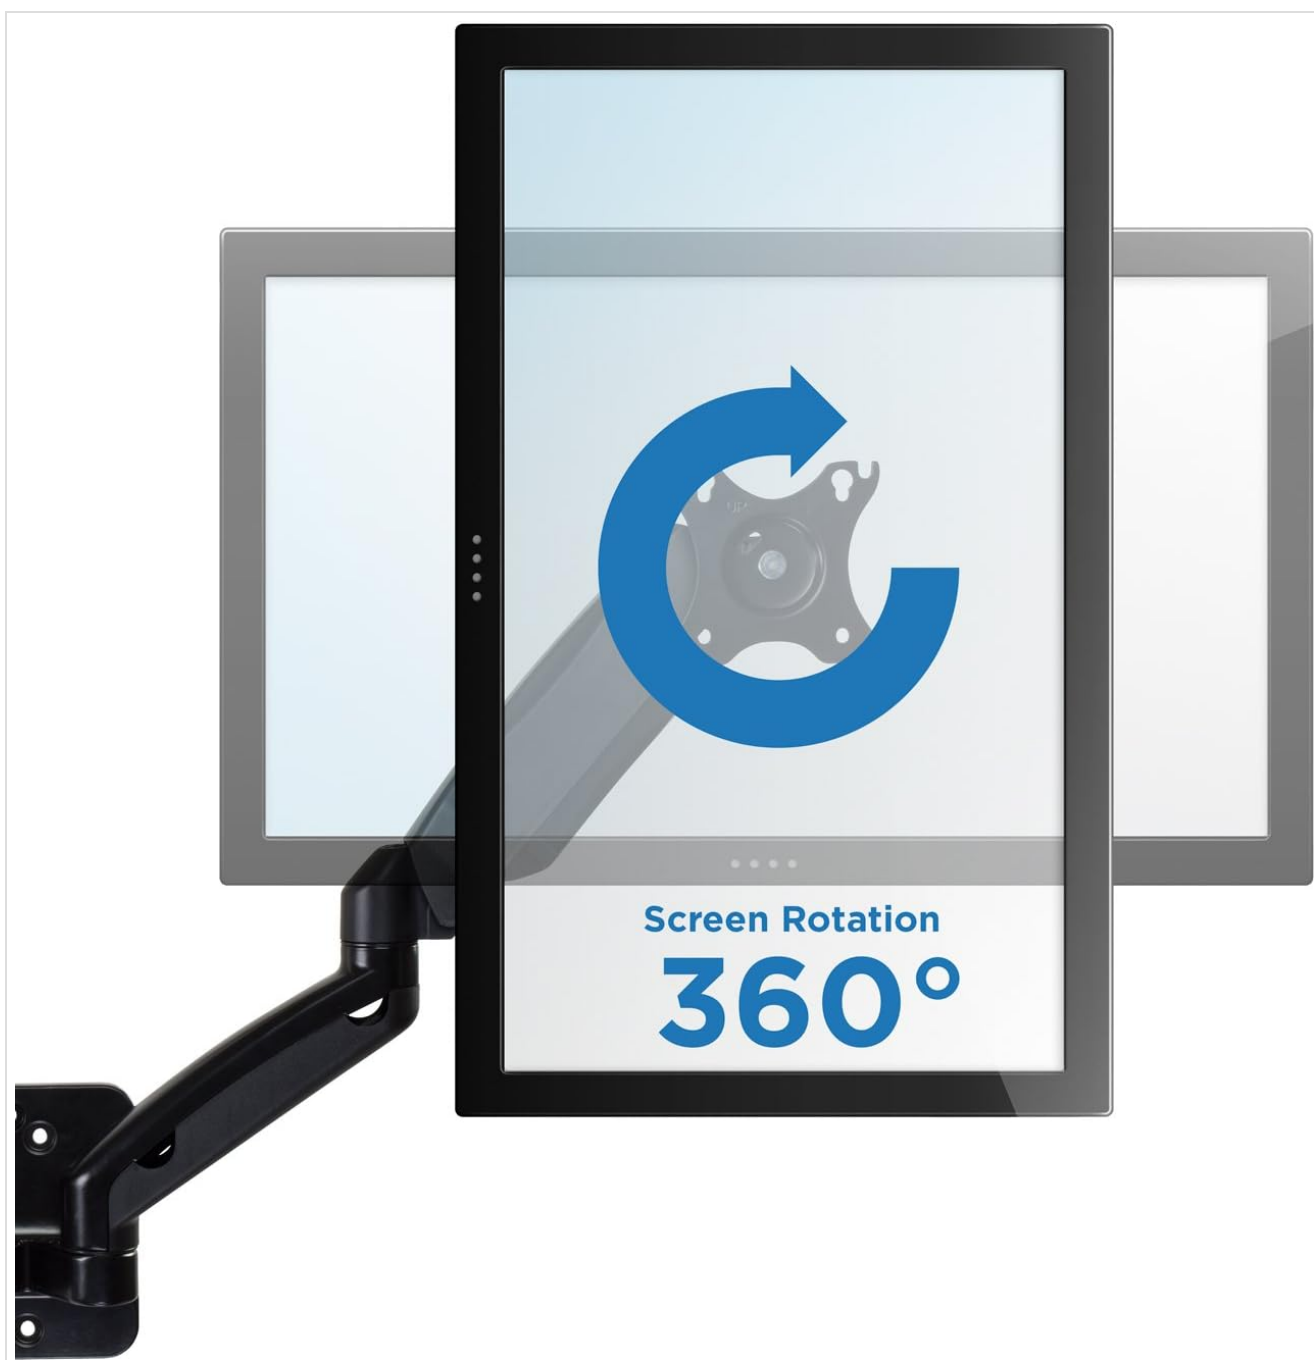


Image 2.2: The mount allows for 360-degree screen rotation.

3. SPECIFICATIONS

Specification	Detail
Model Number	MI-766
Manufacturer	Mount-It!
Mounting Type	Wall Mount
Material	Alloy Steel, Aluminum
Color	Black
Monitor Size Compatibility	13 - 27 inches
Weight Capacity (per arm)	Up to 14.3 lbs (6.5 kg)
VESA Compatibility	75x75mm, 100x100mm
Tilt Range	Up to 90 degrees
Swivel Range	Up to 90 degrees
Rotation	180 degrees (portrait/landscape)
Item Weight	8.6 pounds
Product Dimensions	28 x 6.9 x 6 inches





Image 3.1: VESA mounting compliance for 75x75mm and 100x100mm patterns.

4. PACKAGE CONTENTS

Please verify that all components are present before beginning installation:

- Dual Monitor Wall Mount Assembly
- VESA Monitor Plates (2)
- Mounting Hardware Kit (screws, anchors, washers, Allen keys)
- Instruction Manual

5. SAFETY INFORMATION

- **Weight Capacity:** Do not exceed the maximum weight capacity of 14.3 lbs (6.5 kg) per arm. Overloading can result in serious injury or product damage.
- **Wall Type:** Ensure the mounting surface can safely support the combined weight of the mount and monitors.

This mount is designed for installation into wood studs, solid concrete, or brick walls. Do not install into drywall alone.

- **Professional Installation:** If you are unsure about the installation process or the suitability of your wall, consult a qualified professional.
- **Children:** Keep small parts away from children.
- **Tools:** Use appropriate tools for installation and follow all safety precautions for tool usage.

6. SETUP AND INSTALLATION

6.1. Tools Required

- Pencil
- Drill
- Phillips Head Screwdriver
- Level
- Stud Finder (for wood stud installation)
- Measuring Tape

6.2. Wall Mounting

1. **Locate Mounting Position:** Determine the desired height and position for your monitors. Use a stud finder to locate a wood stud if applicable. Mark the drilling points on the wall.
2. **Drill Pilot Holes:** Drill pilot holes at the marked locations. The size of the drill bit will depend on your wall type and the provided mounting hardware.
3. **Attach Wall Plate:** Secure the wall plate of the monitor mount to the wall using the appropriate screws and anchors. Ensure the mount is level before tightening all fasteners.



Image 6.1: The mount provides stable support on brick, concrete, or wood walls.

6.3. Attaching VESA Plates to Monitors

4. **Identify VESA Pattern:** Locate the VESA mounting holes on the back of your monitors. These are typically 75x75mm or 100x100mm squares.
5. **Attach VESA Plate:** Secure one VESA plate to the back of each monitor using the provided screws. Ensure the screws are tightened firmly but do not overtighten.

6.4. Mounting Monitors to Arms

6. **Slide Monitors On:** Carefully lift each monitor (with VESA plate attached) and slide it onto the corresponding arm's mounting head. The slide-in design allows for easy attachment.
7. **Secure Monitors:** Ensure the monitors are securely seated on the arms. Some models may include a locking screw to prevent accidental dislodging.



Image 6.2: Example of dual monitors installed on the wall mount.

7. OPERATING INSTRUCTIONS

7.1. Adjusting Monitor Position

The gas spring arms allow for fluid movement. Gently push or pull your monitors to achieve the desired height, tilt, swivel, and rotation.

- **Height Adjustment:** Move the monitor up or down.
- **Tilt:** Angle the monitor screen up or down (up to 90 degrees).
- **Swivel:** Rotate the monitor horizontally left or right (up to 90 degrees).
- **Rotation:** Rotate the monitor 180 degrees to switch between landscape and portrait orientations.

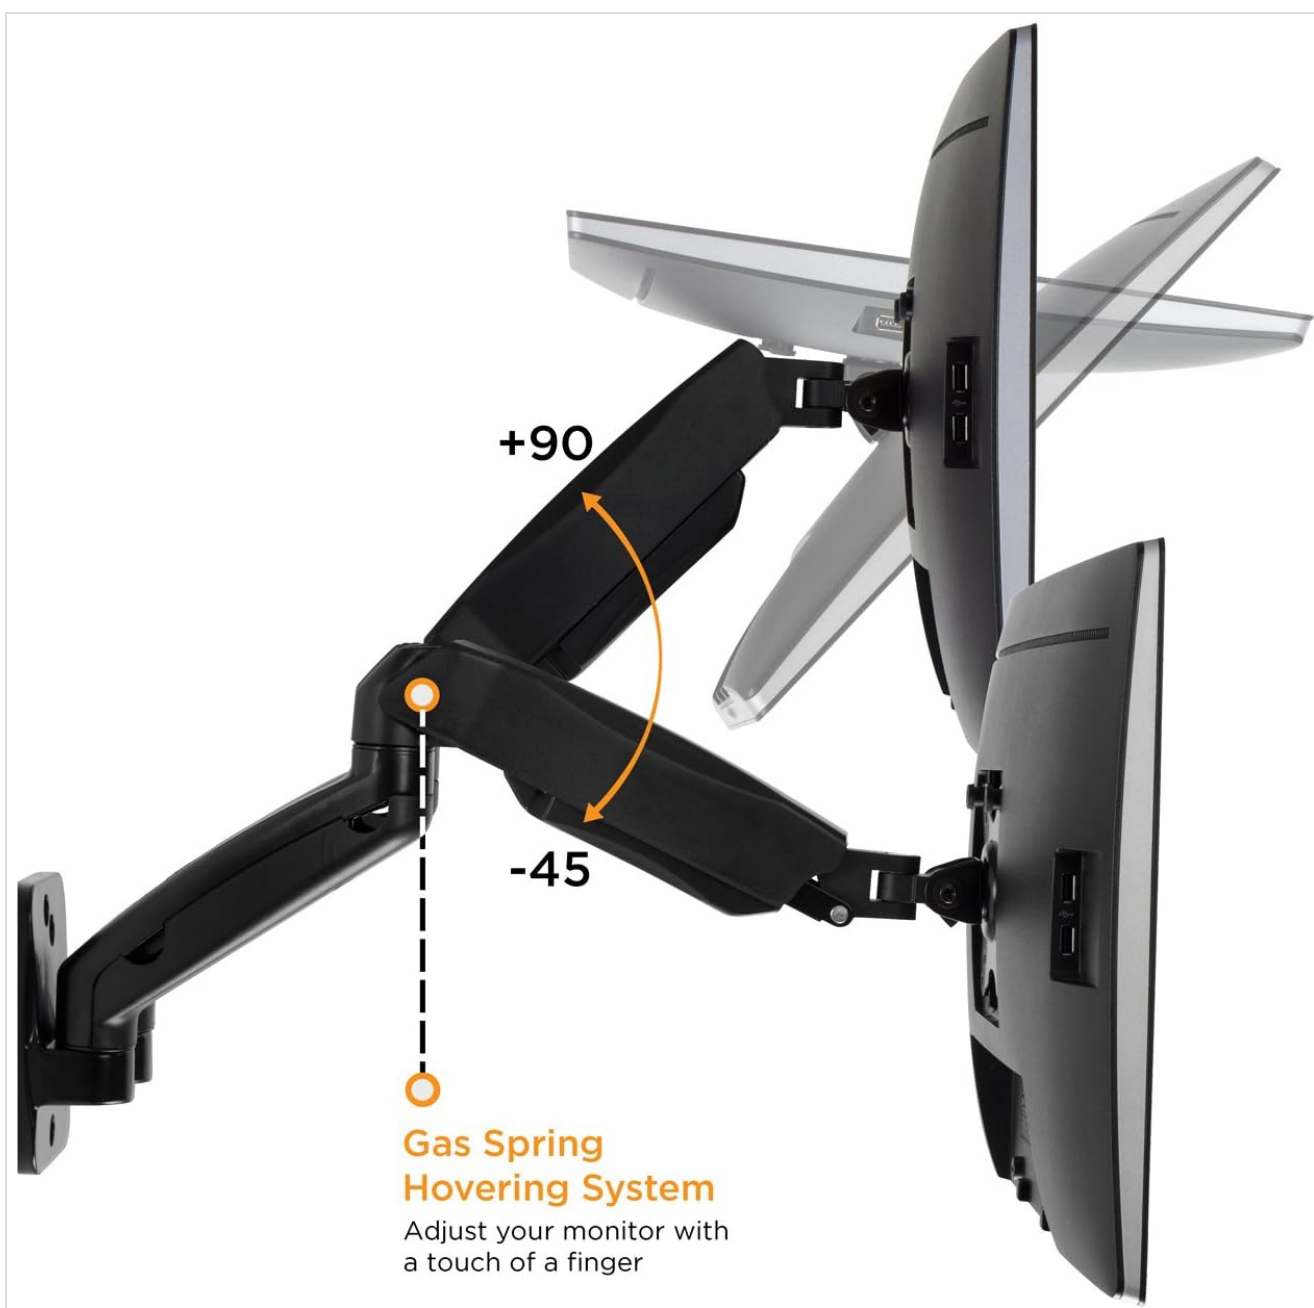


Image 7.1: Gas spring system allows for easy height and tilt adjustments.



7.2. Gas Spring Tension Adjustment

If your monitor does not stay in the desired vertical position, the gas spring tension may need adjustment. Use the provided Allen key to adjust the tension screw located on the arm.

- **For Heavier Monitors:** Turn the screw counter-clockwise to increase tension.
- **For Lighter Monitors:** Turn the screw clockwise to decrease tension.

Adjust gradually and test the monitor's movement until it holds its position securely.

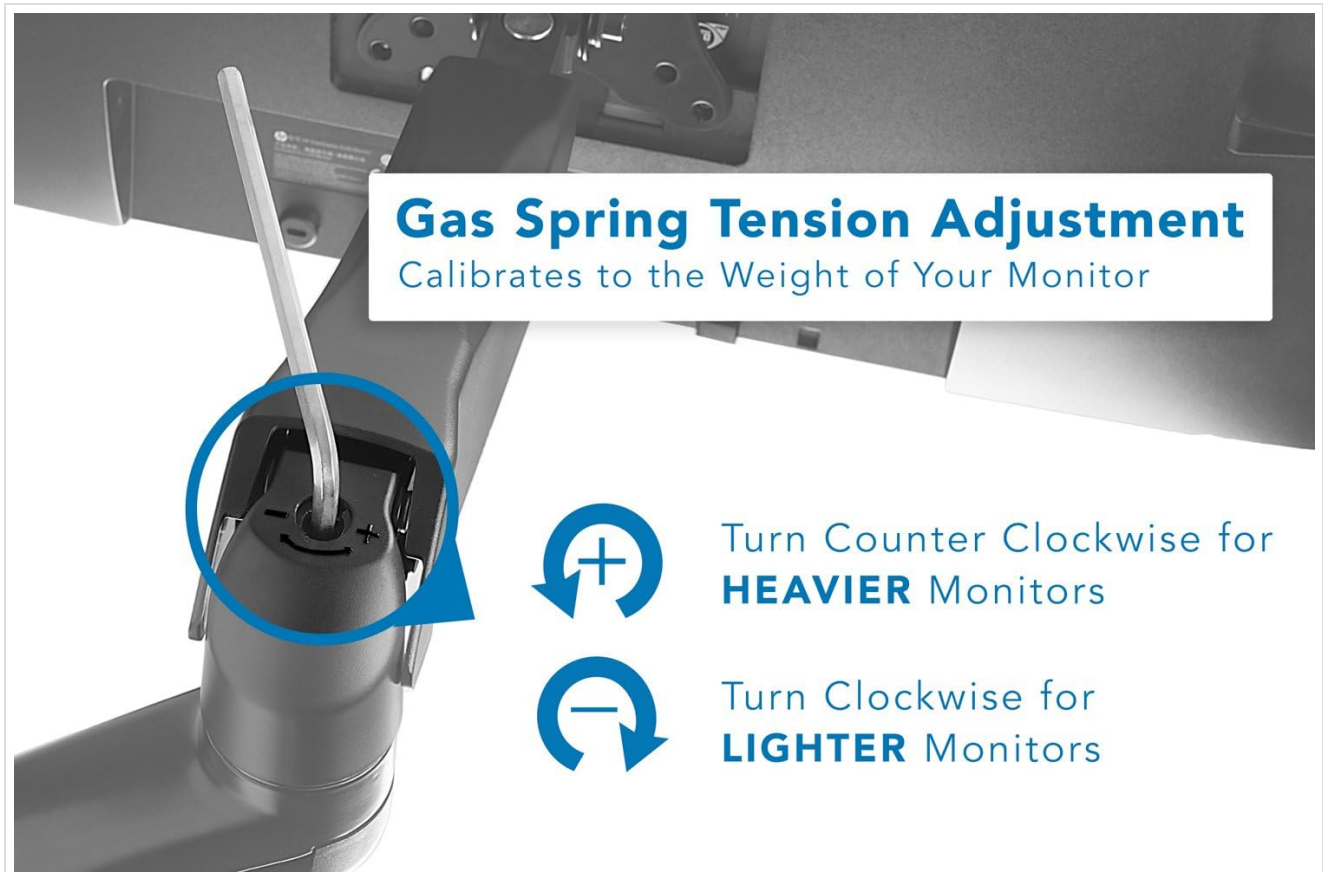


Image 7.3: Adjusting gas spring tension to match monitor weight.

7.3. Cable Management

Route your monitor cables through the integrated cable management channels on the arms to maintain a clean and organized workspace.



Image 7.4: Integrated cable management keeps cables tidy.

8. MAINTENANCE

- **Cleaning:** Wipe the mount with a soft, damp cloth. Avoid abrasive cleaners or solvents.
- **Periodic Inspection:** Regularly check all screws and connections to ensure they remain tight and secure. Retighten if necessary.
- **Lubrication:** The gas spring mechanism is maintenance-free and does not require lubrication.

9. TROUBLESHOOTING

- **Monitor Does Not Hold Position:** Adjust the gas spring tension as described in Section 7.2. Ensure your monitor's weight is within the specified capacity.
- **Mount Feels Unstable:** Verify that all wall mounting screws are securely tightened and that the mount is installed into a suitable wall structure (wood stud, concrete, or brick). Do not use drywall anchors for this type of mount.
- **Difficulty Moving Arms:** Check if the gas spring tension is too high for lighter monitors. Adjust clockwise to reduce tension. Ensure no cables are snagged.
- **Monitors Not Level:** Minor adjustments can be made at the VESA plate connection point to ensure monitors are perfectly aligned.

10. WARRANTY AND SUPPORT

The Mount-It! Dual Monitor Wall Mount MI-766 comes with a **Limited Warranty**. For specific warranty terms and conditions, please refer to the warranty card included with your product or visit the official Mount-It! website.

For technical support, replacement parts, or any questions regarding your product, please contact Mount-It! customer service through their official channels.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B074Q1M4RZ>

More documents and user manuals: <https://manuals.plus/>