

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Hansgrohe](#) /

› [Hansgrohe ShowerSelect Comfort S 15554000 Flush-Mounted Thermostat User Manual](#)

Hansgrohe 15554000

Hansgrohe ShowerSelect Comfort S 15554000 Flush-Mounted Thermostat User Manual

Model: 15554000

Brand: Hansgrohe

PRODUCT OVERVIEW

The Hansgrohe ShowerSelect Comfort S flush-mounted thermostat is designed to enhance your bathroom experience with its sleek design and intuitive functionality. This thermostat controls two water outlets, providing precise temperature and flow management for your shower or bath. Its ultra-flat construction offers more space and a modern aesthetic.

INSTALLATION INSTRUCTIONS

The ShowerSelect Comfort S thermostat requires flush-mounted installation. A basic body, specifically the Hansgrohe iBox universal 2 (#01500180), is necessary for proper installation. Ensure all plumbing connections are secure and watertight before final assembly. Professional installation is recommended to ensure correct functionality and compliance with local building codes.



Figure 1: Fast Concealed Installation. This image illustrates the process of installing the basic body for the flush-mounted thermostat.

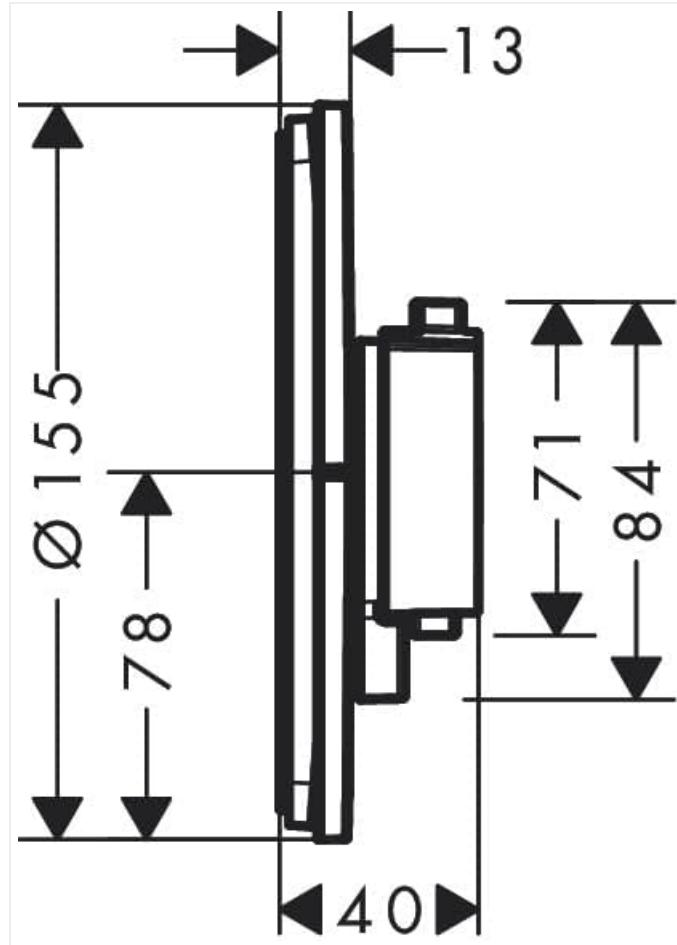


Figure 2: Product Dimensions. Refer to this diagram for precise measurements required for installation planning.

OPERATING THE THERMOSTAT

Water On/Off (Select Function)

The thermostat features large, intuitive buttons for turning water on and off. Press the upper or lower button to activate the corresponding water outlet (e.g., head shower or hand shower). Both functions can be used simultaneously if desired.



Figure 3: Easy On and Off. Simply press the designated buttons to control water flow to your desired outlet.

Temperature Control

The thermostat maintains a constant desired water temperature. To adjust the temperature, rotate the central handle. The **SafetyStop** feature prevents accidental scalding by requiring a deliberate action (usually a button press on the handle) to increase the temperature above 40°C.



Increase Temperature Safely

Figure 4: Increase Temperature Safely. The SafetyStop feature ensures water temperature is controlled to prevent scalding.

Water Flow Control

The slim lower handle allows for individual adjustment of the water flow rate, enabling water conservation if desired. This feature provides flexibility in your showering experience.



Convenient Water Control

Figure 5: Convenient Water Control. Adjust the water flow precisely using the dedicated handle.

MAINTENANCE AND CARE

To ensure the longevity and appearance of your Hansgrohe thermostat, regular cleaning is recommended. The 'Quick Clean' feature simplifies maintenance. Use mild cleaning agents and a soft cloth. Avoid abrasive cleaners, scouring pads, or harsh chemicals, as these can damage the chrome finish. The thermostat also supports thermal disinfection for hygiene purposes.



Figure 6: Easy to Clean. The smooth chrome surface allows for quick and effective cleaning.

TROUBLESHOOTING

If you experience issues with your thermostat, first check the water supply to your home. Ensure the iBox universal 2 basic body is correctly installed and accessible. Verify that the temperature and flow controls are set appropriately. For persistent problems such as inconsistent temperature, low flow, or leaks, it is recommended to consult a qualified plumber or contact Hansgrohe customer support for assistance.

TECHNICAL SPECIFICATIONS

Feature	Specification
Manufacturer	Hansgrohe
Part Number	15554000
Product Dimensions	4.2 x 15.5 x 15.5 cm
Item Weight	2.31 kg

Feature	Specification
Colour	Chrome
Style	Contemporary
Finish	Chrome
Material	Metal
Installation Method	Single Hole, Flush-Mounted
Number of Handles	2
Mounting Type	Wall Mount
Special Features	Ultra-Flat Construction, Thermostat Function, Touch-On/Touch-Off Operation (Select), Water Flow Control, SafetyStop (40°C)
Included Components	Functional block, mounting material, thermostat, assembly instructions
Recommended uses for product	Shower

WARRANTY AND CUSTOMER SUPPORT

Hansgrohe provides a 5-year voluntary manufacturer's warranty on this product, reflecting its high quality standards. Additionally, replacement parts are guaranteed to be available for up to 15 years after the product line expires, ensuring long-term usability. For technical assistance, warranty claims, or to purchase replacement parts, please refer to the contact information provided with your purchase or visit the official Hansgrohe website for your region.