

- Manuals.plus /
- > Xuanlur /
 - > Xuanlur 24-inch Bathroom Vanity with Sink (Model YSG-23) - Instruction Manual

Xuanlur YSG-23

Xuanlur 24-inch Bathroom Vanity with Sink (Model YSG-23) - Instruction Manual

Model: YSG-23 | Brand: Xuanlur

INTRODUCTION

This manual provides detailed instructions for the assembly, installation, operation, and maintenance of your Xuanlur 24-inch Bathroom Vanity with Sink, Model YSG-23. This wall-mounted vanity features two soft-close cabinet doors, a white ceramic sink, and metal legs, designed for small bathroom spaces. Please read all instructions carefully before proceeding with assembly and installation to ensure safe and correct usage.



Front view of the assembled Xuanlur 24-inch bathroom vanity, showcasing its black finish, white ceramic sink, and metal legs.

SAFETY INFORMATION

- Read all instructions thoroughly before beginning assembly or installation.
- Keep all packaging materials and small parts away from children and pets.
- Always use appropriate safety gear, such as safety glasses, during assembly.
- Do not overtighten screws, as this may damage the material.
- Ensure the vanity is securely mounted to wall studs for stability, especially for wall-mounted installations.
- If you are unsure about any step, consult a qualified professional.

PACKAGE CONTENTS

Please verify that all components listed below are present before starting assembly. If any parts are missing or damaged, contact customer support.

- Vanity Cabinet Body (1)
- Ceramic Sink Top (1)
- Metal Legs (4)
- Cabinet Doors (2)
- Soft-Close Hinges (2 pairs)
- Door Handles (2)
- Assembly Hardware (screws, wall anchors, etc.)
- Instruction Manual (1)

TOOLS REQUIRED


The following tools are recommended for assembly and installation:

- Phillips Head Screwdriver
- Adjustable Wrench
- Electric Drill
- Level
- Measuring Tape
- Pencil
- Safety Glasses
- Silicone Sealant (optional, for sink installation)

SETUP AND ASSEMBLY INSTRUCTIONS

Follow these steps carefully to assemble and install your vanity.

1. **Unpack and Inspect:** Carefully remove all components from the packaging. Lay them out on a clean, soft surface to prevent scratches. Verify all parts against the 'Package Contents' list.
2. **Attach Metal Legs:** Secure the four metal legs to the designated mounting points on the bottom of the vanity cabinet using the provided hardware. Ensure they are tightened firmly for stability.
3. **Install Hinges:** Attach the soft-close hinges to the cabinet doors and the corresponding points on the cabinet frame. Refer to the hinge instructions for proper alignment.
4. **Mount Doors:** Carefully attach the cabinet doors to the hinges on the cabinet frame. Adjust the hinges as needed to ensure the doors are level and close properly.
5. **Install Door Handles:** Attach the two door handles to the pre-drilled holes on the cabinet doors.
6. **Place Ceramic Sink Top:** Carefully place the ceramic sink top onto the vanity cabinet. Ensure it is properly aligned. For added stability and water sealing, apply a thin bead of silicone sealant around the top edge of the cabinet before placing the sink (optional, sealant not included).
7. **Wall Mounting (Recommended):** For enhanced stability and safety, especially for wall-mounted designs, secure the vanity to the wall. Locate wall studs using a stud finder. Mark the drilling points on the wall and the back of the vanity. Drill pilot holes and use appropriate wall anchors and screws to firmly attach the vanity to the wall.
8. **Connect Plumbing:** Connect your faucet and drain assembly (not included) to the ceramic sink according to their respective manufacturer's instructions. Ensure all connections are watertight.

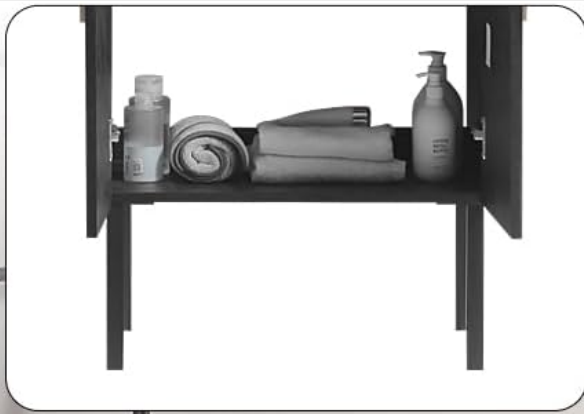

Large Storage Space

Make your bathroom tidy and organized.

Towels, shampoos, shower gels, soaps, body lotions, skin care products, tissue etc



The vanity with its two soft-close doors open, illustrating the internal storage compartment suitable for toiletries and towels.



Detailed view highlighting the round gold-colored handles, the anti-bumping design of the sink edge, and the thickening casting for durability.

Fashion design

Smooth surface is easy to clean and remove stain



The vanity cabinet top without the ceramic sink, demonstrating the structure where the sink is placed and secured.

Beautiful and atmospheric design style



Faucet mounting hole


35mm



Overflow Design



A close-up of the white ceramic sink, showing the 35mm faucet mounting hole and the integrated overflow design for preventing leaks.

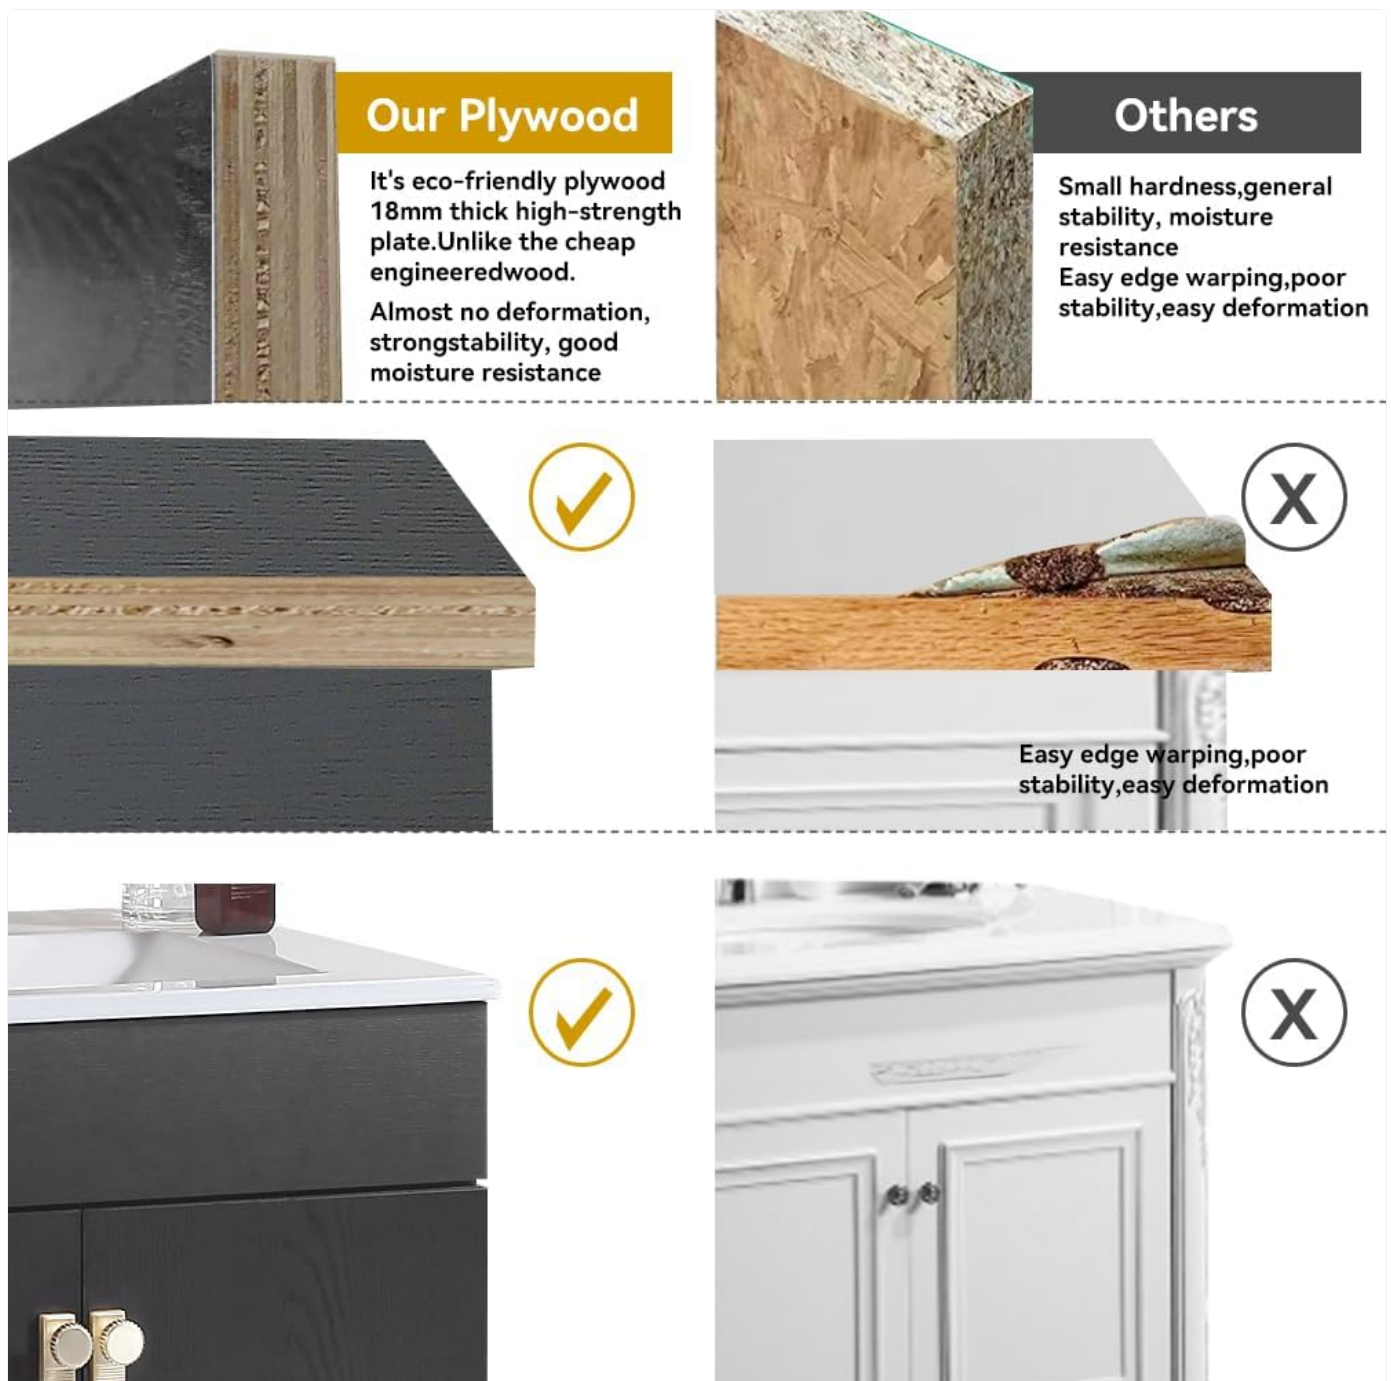

An illustration comparing the 18mm thick high-strength plywood used in the Xuanlur vanity with other engineered wood types, emphasizing its durability and moisture resistance.

OPERATING INSTRUCTIONS

- **Soft-Close Doors:** The cabinet doors are equipped with soft-close hinges. To operate, simply push the door gently to close, and the mechanism will engage to ensure a quiet and smooth closure. Avoid forcing the doors shut.
- **Sink Usage:** The ceramic sink is designed for daily bathroom use. Ensure the faucet is properly installed and functioning. The integrated overflow hole helps prevent water from spilling over the basin edge.

MAINTENANCE AND CARE

Proper care will extend the life and appearance of your vanity.

- **Cleaning the Ceramic Sink:** Wipe the ceramic sink with a damp cloth and mild, non-abrasive cleaner. Rinse thoroughly and dry with a soft cloth. Avoid harsh chemicals, abrasive pads, or acidic cleaners, as these can damage the glossy finish. The sink is stain resistant.

- **Cleaning the Cabinet:** Wipe the cabinet surfaces with a soft, damp cloth. For tougher spots, use a mild soap solution and immediately dry with a clean cloth. Avoid excessive moisture and harsh cleaning agents.
- **Regular Inspection:** Periodically check all plumbing connections for leaks and tighten if necessary. Inspect hinges and hardware for any loosening and secure them as needed.

TROUBLESHOOTING

If you encounter any issues, refer to the following common problems and solutions:

- **Doors Not Closing Softly:** Check the soft-close hinges. Ensure they are properly installed and adjusted. Refer to the hinge manufacturer's instructions for adjustment if necessary.
- **Sink Leaks:** Verify all plumbing connections (faucet, drain) are securely tightened. If silicone sealant was used, check for gaps or cracks. Consult a plumber if leaks persist.
- **Vanity Feels Wobbly:** Ensure the metal legs are firmly attached and all screws are tightened. If wall-mounted, confirm the vanity is securely fastened to wall studs.
- **Scratches or Dents:** For minor surface imperfections on the cabinet, touch-up pens or furniture repair kits matching the finish may be used.

SPECIFICATIONS

Brand	Xuanlur
Model Number	YSG-23
Product Dimensions (D x W x H)	24" x 18" x 22"
Material (Cabinet)	Wood (Plywood)
Material (Sink Top)	Ceramic
Color	Black With Metal Leg
Mounting Type	Wall Mount
Number of Doors	2
Special Feature	Stain Resistant (Sink)
Required Assembly	Yes
Item Weight	54.23 Pounds
UPC	884518778763

WARRANTY AND SUPPORT

For any questions, technical assistance, or warranty claims, please contact Xuanlur customer service. Refer to your purchase documentation or the retailer's website for specific warranty details and contact information. Please have your model number (YSG-23) and purchase date available when contacting support.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0CLR71HGX>

More documents and user manuals: **<https://manuals.plus/>**