



[Manuals.plus](#) /

> [SunCleanse](#) /

> SunCleanse 12-Inch Dual Filtered Rainfall Shower System Instruction Manual

SunCleanse ZDQ-SF12R3

SunCleanse 12-Inch Dual Filtered Rainfall Shower System Instruction Manual

Model: ZDQ-SF12R3

1. INTRODUCTION

Thank you for choosing the SunCleanse 12-Inch Dual Filtered Rainfall Shower System. This manual provides essential information for the safe installation, operation, and maintenance of your new shower system. Please read these instructions thoroughly before installation and keep them for future reference.

FREE 2 Replacement Filters

\$39.99
Value

FREE

≈\$ 39.99

	ODOR FREE WATER Removes smell of the chlorine and unpleasant odors		HAIR REPAIR Rejuvenates damaged hair, makes it softer and smoother
	PROTECT SKIN Prevents dryness and gives better feeling for sensitive skin		BABY HEALTH CARE Perfect for young children and baby's sensitive skin

Image 1.1: The SunCleanse 12-inch dual filtered rainfall shower system, featuring a large overhead shower head and a handheld sprayer, both in a matte black finish.

2. SAFETY INFORMATION

- Always turn off the main water supply before beginning any installation or maintenance.
- Professional installation is recommended to ensure proper function and compliance with local plumbing codes.
- Ensure all connections are secure to prevent leaks.
- Do not use abrasive cleaners or harsh chemicals on the finish, as this may damage the product.
- The pressure balance valve is designed to prevent scalding from sudden temperature changes. Do not tamper with this component.

3. PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- 12 Inch Rain Shower Head

- 3-Setting Handheld Shower Wand
- 71-Inch Stainless Steel Shower Hose
- Rough-in Shower Mixer Valve with Trim kit
- Shower Filter
- 16 Inch Shower Arm
- Installation Manual
- Accessories Required for Installation (e.g., mounting hardware)
- Handheld Shower Cleaning Tool



Image 3.1: An exploded view diagram illustrating all parts included in the SunCleanse shower system package, numbered for easy identification.

4. FEATURES

4.1 Advanced Filtration Technology

The SunCleanse Rain Shower Faucet System incorporates a cutting-edge filtration technology with a high-quality filter cartridge. This system is designed to effectively remove chlorine, heavy metals (such as lead, mercury, nickel, and chromium), and other harmful substances from your shower water, providing a cleaner and safer bathing experience.



Image 4.1: A detailed diagram showcasing the multi-layer filtration media within the shower filter, highlighting its effectiveness against chlorine, fluoride, heavy metals, and odors.

4.2 Unparalleled Water Pressure


Experience a high-pressure rainfall shower. The ultra-thin design of the rain shower head ensures that water achieves a strong, consistent flow, even in environments with lower water pressure, by channeling it through a small space.



Image 4.2: A visual representation of the high-pressure water flow from the 12-inch rainfall shower head, demonstrating its strong and consistent output.

4.3 Water Hammer Prevention

The integrated pressure balance valve (PBV) includes two built-in check valves to effectively eliminate water hammer noise. The PBV cartridge continuously monitors and balances water pressure, protecting users from potential scalding caused by abrupt fluctuations in hot or cold water pressure.

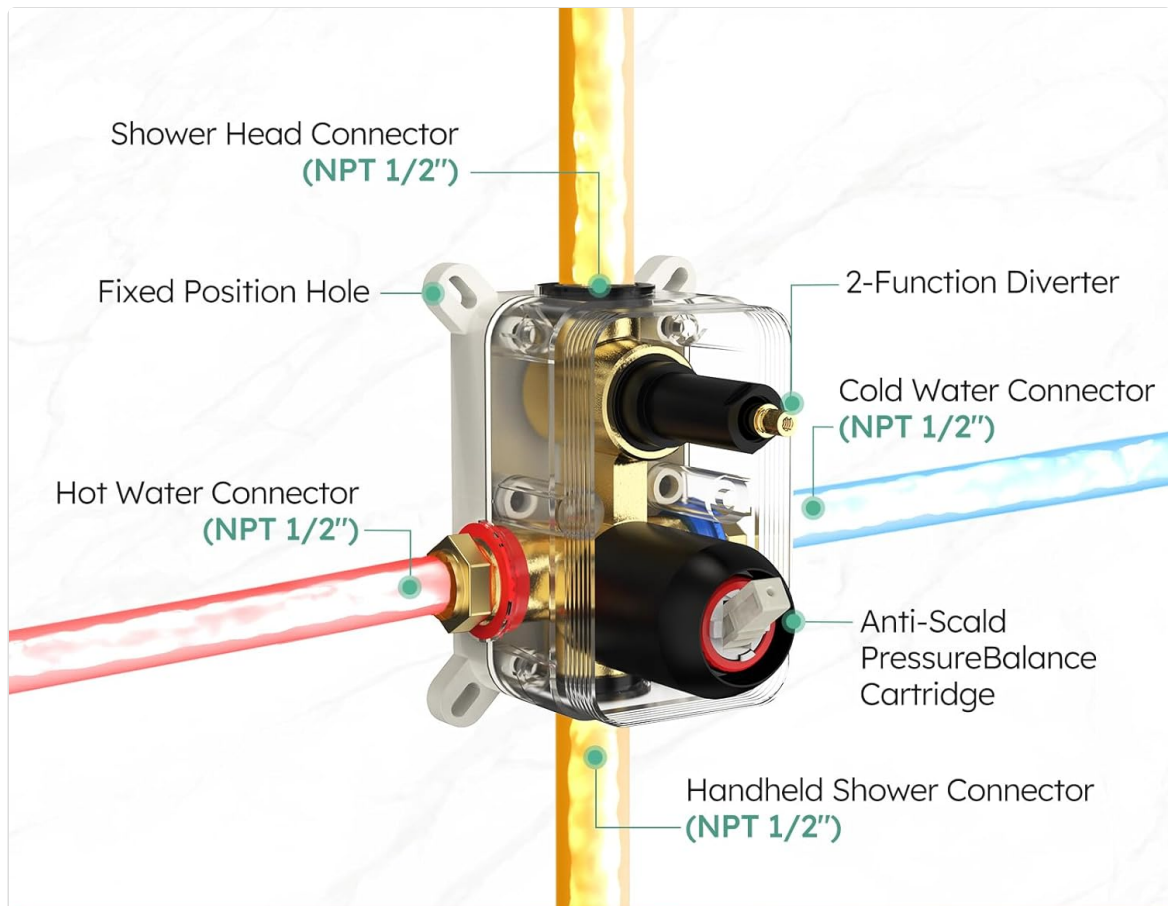

 <p>Use with Confidence</p>	 <p>Non Water Hammer Noise</p>	 <p>Solid Brass valve</p>	 <p>Protect & Help with Installation</p>
--	---	--	---


Image 4.3: A detailed diagram of the rough-in valve, highlighting the hot and cold water connectors, the 2-function diverter, and the anti-scald pressure balance cartridge.

4.4 Versatile Shower Experience


The 12-inch rain shower head delivers a luxurious rainfall experience. The 3-function handheld spray offers various modes: gentle rain, massage rain, and power rain. Soft silicone nozzles on both shower heads allow for easy removal of accumulated minerals, ensuring long-lasting performance.

4 SPRAY MODE


Enhance Your Shower Experience with 4 Adjustable Settings:
Have Fun and Refresh Yourself




Rainfall



Gentle Rain



Massage Rain



Power Rain

Image 4.4: Visual examples of the four available spray modes: Rainfall from the main head, and Gentle Rain, Massage Rain, and Power Rain from the handheld sprayer.

4.5 Adjustable Angle

Both the main shower head and the handheld shower holder feature adjustable angles for a customized shower experience. The main shower head includes an adjustable brass swivel ball joint, and the handheld holder allows for free angle adjustment, making it easy to find your ideal water flow angle.



Image 4.5: A diagram demonstrating the adjustable angle capabilities of both the main rainfall shower head and the handheld shower head, allowing for personalized positioning.

5. INSTALLATION

The SunCleanse Shower System is designed for wall-mounted installation. It is compatible with standard 1/2" US hot and cold water pipe connections. All necessary installation hardware and detailed instructions are included in the package. For optimal performance and to ensure compliance with local plumbing codes, professional installation is recommended.

5.1 Pre-Installation Checklist

- Ensure the main water supply is turned off.
- Verify all package contents are present and undamaged.
- Gather necessary tools (e.g., wrench, plumber's tape, level).

5.2 General Installation Steps (Refer to included manual for detailed steps)

1. Install the rough-in valve into the wall, ensuring it is level and at the correct depth relative to your finished wall surface.
2. Connect the hot and cold water lines to the designated inlets on the rough-in valve.
3. Connect the shower head and handheld sprayer outlets from the valve to their respective pipes.
4. Install the shower arm and attach the 12-inch rain shower head.
5. Mount the handheld shower holder and connect the 71-inch stainless steel shower hose to the handheld wand and the valve outlet.
6. Install the trim kit, including the cover plate, handle, and diverter knob.
7. Install the shower filter between the shower arm and the rain shower head, or as indicated in the detailed instructions.
8. Turn on the main water supply and check for leaks.

6. OPERATION

6.1 Water Flow and Temperature Control

The single handle on the trim kit controls both water flow and temperature. Rotate the handle to adjust temperature (typically counter-clockwise for hotter, clockwise for colder) and pull it out to increase flow, push in to decrease flow or turn off.

6.2 Shower Mode Selection

Use the diverter knob on the trim kit to switch between the 12-inch rain shower head and the handheld shower wand. The handheld shower wand features a button or lever to cycle through its three spray modes: Gentle Rain, Massage Rain, and Power Rain.

7. MAINTENANCE

7.1 Cleaning the Shower Heads

The soft silicone nozzles on both the rain shower head and handheld wand are designed for easy cleaning. To remove mineral buildup, gently rub the nozzles with your finger or a soft cloth. For stubborn deposits, use a mild descaling solution specifically designed for shower heads, following the product's instructions.

7.2 Filter Replacement

The shower filter cartridge should be replaced periodically to maintain optimal filtration performance. The frequency of replacement depends on water quality and usage. Refer to the filter's specific instructions for replacement guidelines. Ensure the water supply is turned off before replacing the filter.

7.3 Finish Care

To preserve the matte black finish, clean regularly with a soft, damp cloth. Avoid using abrasive cleaners, harsh chemicals, or scouring pads, as these can scratch or damage the finish.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Low Water Pressure	Clogged nozzles; partially closed shut-off valve; clogged filter.	Clean shower head nozzles; ensure shut-off valves are fully open; replace shower filter.
Leaks from connections	Loose connections; worn washers/O-rings; insufficient plumber's tape.	Tighten connections; replace washers/O-rings; reapply plumber's tape.
Water Temperature Fluctuations	Pressure balance valve issue; external water supply changes.	Ensure proper installation of the pressure balance valve; consult a professional plumber if issues persist.

Problem	Possible Cause	Solution
Water Hammer Noise	Rapid changes in water flow; loose pipes.	The pressure balance valve is designed to minimize this; if persistent, check pipe securing or consult a plumber.

9. SPECIFICATIONS

Specification	Detail
Brand	SunCleanse
Model Number	ZDQ-SF12R3
Color	Matte Black
Material	Acrylonitrile Butadiene Styrene (ABS), Brass, Metal, Stainless Steel
Finish Type	Matte Black
Number of Handles	2
Mounting Type	Wall Mount
Head Size	12 Inch
Item Weight	12.27 pounds (5.58 Kilograms)
Product Dimensions	16 x 13 x 18 inches
Certifications	cUPC, California Energy Commission (CEC) approved

10. WARRANTY AND SUPPORT

SunCleanse provides a **5-YEAR FREE REPLACEMENT** for any parts of the Health Care Shower System with valve. We are committed to providing 24-hour customer service support to resolve any issues related to your bathroom shower fixtures. If you require replacement parts or assistance, please contact us directly.

Customer Service: +1 877-634-3531