

Saved from manuals.plus.

Open the live page for links to other documents and user manuals.

[Manuals.plus](#) /

› [Golden Lighting](#) /

› Golden Lighting Hines Mini Pendant 6.88" Black Instruction Manual

Golden Lighting Hines 3118-M1L BLK-SD

Golden Lighting Hines Mini Pendant 6.88" Black Instruction Manual

Model: 3118-M1L BLK-SD

INTRODUCTION

Thank you for choosing the Golden Lighting Hines Mini Pendant. This fixture combines transitional style with modern finishes, featuring a black finish and seeded glass shade. Designed for indoor use, this manual provides detailed instructions for safe installation, operation, and maintenance of your new pendant light.



Image: Golden Lighting Hines Mini Pendant (6.88" Black) installed above a kitchen island.

IMPORTANT SAFETY INFORMATION

Please read and understand all instructions before beginning installation. Failure to do so may result in electric shock, fire, or other injuries that can be fatal or cause serious damage. Installation should be performed by a qualified electrician or a person with sufficient electrical knowledge.

- **WARNING:** To avoid electric shock, disconnect power at the circuit breaker or fuse box before installation.
- Ensure all electrical connections comply with local codes and ordinances, as well as the National Electric Code (NEC).
- Use only the specified bulb type and wattage to prevent overheating.
- Do not install this fixture in wet or damp locations. It is rated for dry locations only.
- Handle glass components with care to prevent breakage.

SETUP AND INSTALLATION

Package Contents

Verify that all components are present before beginning installation:

- Mounting Plate
- Canopy
- Downrods (various lengths)
- Fixture Body with Wire
- Glass Shade
- Socket Ring
- Hardware Pack (screws, wire nuts)

Tools Required

- Phillips Head Screwdriver
- Flathead Screwdriver
- Wire Strippers
- Pliers
- Electrical Tape
- Ladder

Installation Steps

1. **Turn off Power:** Locate the circuit breaker or fuse box and turn off the power to the junction box where the fixture will be installed.
2. **Prepare Mounting Plate:** Attach the mounting plate to the junction box using the provided screws. Ensure it is securely fastened.
3. **Assemble Downrods:** Determine the desired hanging height. Thread the fixture wire through the chosen downrods and connect them to the fixture body and canopy.



Image: Full view of the Golden Lighting Hines Mini Pendant, showing the downrod and fixture body.

4. Make Electrical Connections:

- Connect the fixture's black wire to the house's black (hot) wire using a wire nut.
- Connect the fixture's white wire to the house's white (neutral) wire using a wire nut.
- Connect the fixture's ground wire to the house's ground wire (or ground screw on the mounting plate) using a wire nut.
- Ensure all connections are secure and wrap them with electrical tape if necessary.

5. Mount Canopy: Carefully push the wired canopy up to the ceiling, aligning the mounting screws on the mounting plate with the holes in the canopy. Secure the canopy with the decorative nuts or screws.



Image: Close-up of the pendant's upper hardware, including the connection point to the downrod.

6. **Install Glass Shade:** Place the glass shade over the socket and secure it with the socket ring. Do not overtighten.

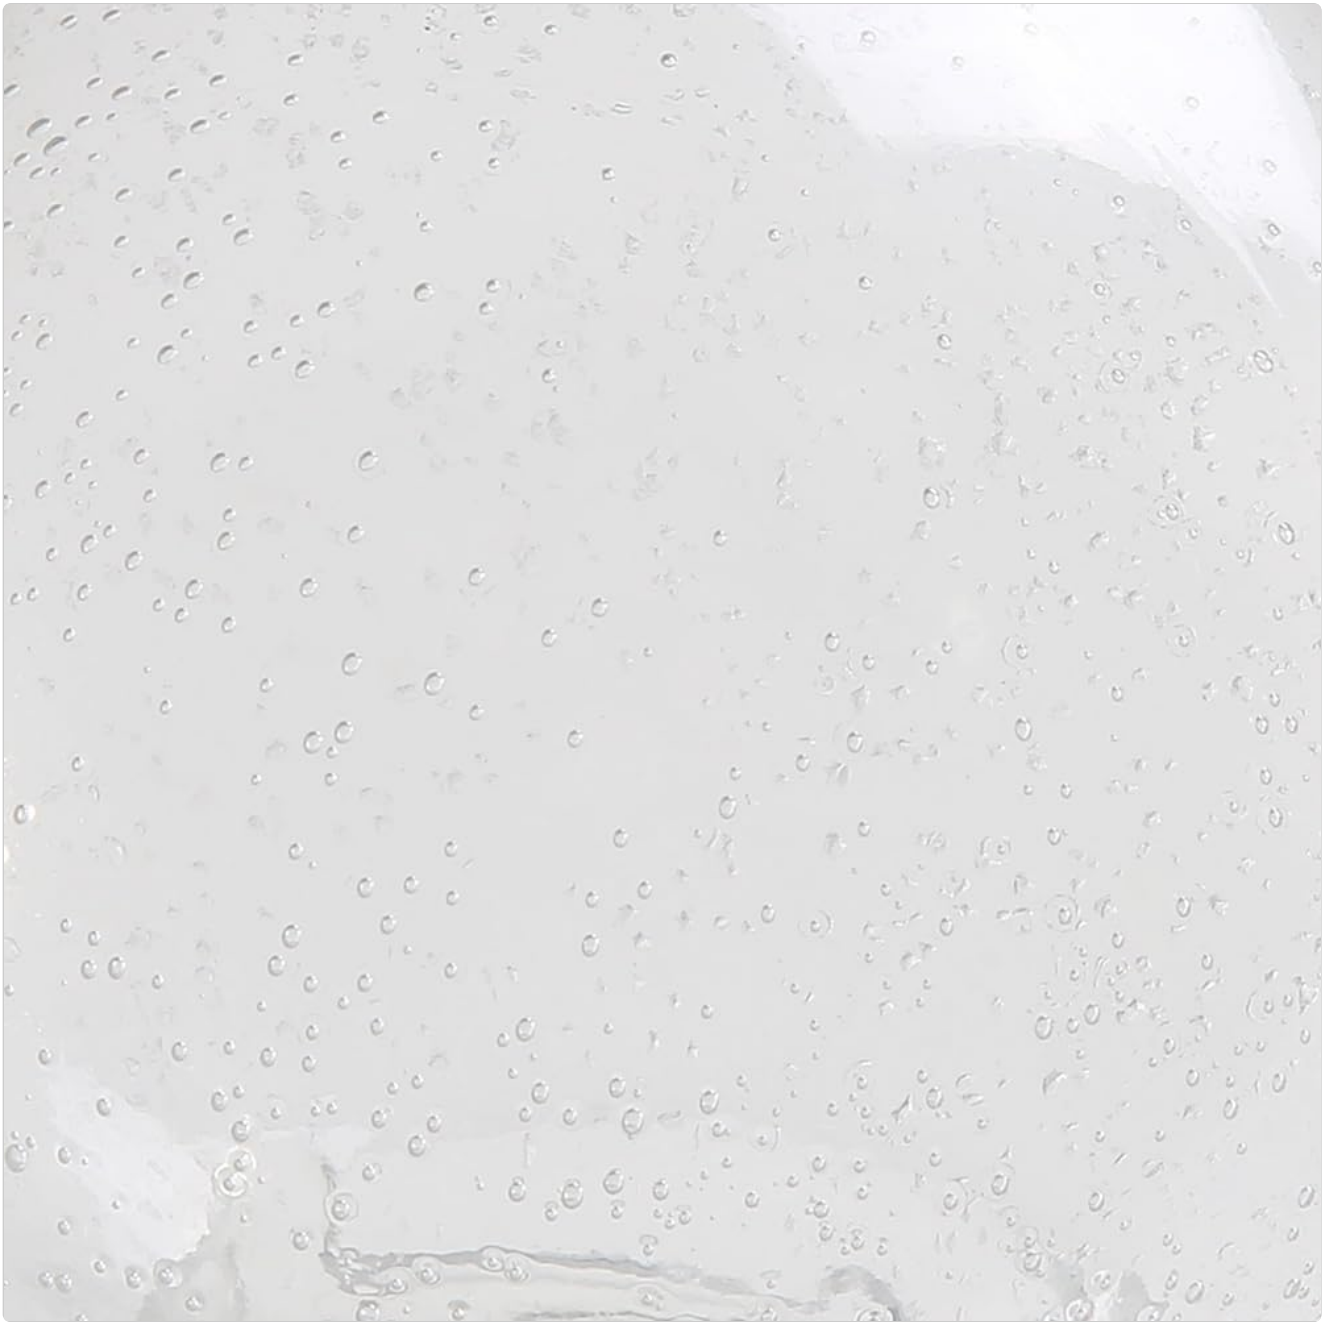


Image: Detailed view of the seeded glass shade, highlighting its texture.

7. **Install Bulb:** Screw in a Type A incandescent bulb (E26 base, maximum 100 watts) into the socket.
8. **Restore Power:** Turn the power back on at the circuit breaker.

OPERATING INSTRUCTIONS

The Golden Lighting Hines Mini Pendant operates via a standard wall switch connected to the circuit. Ensure the correct bulb is installed for optimal performance.

- **Turning On/Off:** Use the wall switch to control the light fixture.
- **Bulb Type:** This fixture requires one (1) Type A incandescent bulb with an E26 (medium) base. Do not exceed 100 watts.
- **Bulb Replacement:**
 - a. Turn off power at the circuit breaker before replacing the bulb.
 - b. Allow the old bulb to cool completely before touching.
 - c. Unscrew the old bulb and screw in the new bulb.
 - d. Restore power at the circuit breaker.

MAINTENANCE

Regular cleaning and proper care will help maintain the appearance and functionality of your pendant light.

- **Cleaning the Fixture:**

- Always disconnect power before cleaning.
- Wipe the metal finish with a soft, dry cloth. Avoid abrasive cleaners or polishes, as they may damage the finish.



Image: Detailed view of the matte black finish on the pendant's metal components.

- **Cleaning the Glass Shade:**

- Remove the glass shade carefully.
- Wash with mild soap and water, then rinse thoroughly.
- Dry completely with a soft, lint-free cloth before reattaching.

TROUBLESHOOTING

If you experience issues with your pendant light, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	- Power is off at the circuit breaker. - Bulb is loose or burned out. - Incorrect wiring connection.	- Check the circuit breaker and ensure power is on. - Tighten or replace the bulb. - Verify wiring connections (consult a qualified electrician if unsure).
Light flickers.	- Loose bulb. - Loose wiring connection. - Incompatible dimmer switch (if applicable).	- Tighten the bulb. - Check wiring connections (consult a qualified electrician). - Ensure dimmer switch is compatible with incandescent bulbs.
Glass shade is loose.	Socket ring not tightened.	Carefully tighten the socket ring until the shade is secure.

SPECIFICATIONS

Feature	Detail
Brand	Golden Lighting
Model Name	Hines
Model Number	3118-M1L BLK-SD
Color	Black
Material	Alloy Steel, Glass
Style	Contemporary, Transitional
Fixture Type	Pendant
Product Dimensions	6.88"L x 3.31"W x 9.13"H
Indoor/Outdoor Usage	Indoor (Dry Location)
Power Source	Hardwired
Installation Type	Semi Flush Mount (Pendant)
Light Source Type	Incandescent, Type A
Finish Type	Matte Black
Shade Material	Glass (Seeded Glass)
Number of Light Sources	1
Voltage	120 Volts
Wattage	100 watts (Max)

Feature	Detail
Bulb Base	E26
Brightness	1600 lumen (Max)
Assembly Required	Yes
Certifications	UL, cUL
Item Weight	0.01 Ounces
UPC	844375045705

WARRANTY INFORMATION

Golden Lighting provides the following warranty for this product:

- **Structural Defects:** 1-year warranty from the date of purchase.
- **Finish:** 6-month warranty from the date of purchase.

This warranty covers defects in materials and workmanship under normal use. It does not cover damage resulting from improper installation, accident, misuse, abuse, or unauthorized modifications. For warranty claims, please retain your proof of purchase.

CUSTOMER SUPPORT

If you have any questions, require assistance with installation, or need to report a missing part, please contact Golden Lighting customer service:

- **Website:** www.goldenlighting.com
- **Email:** Refer to the official website for contact email.
- **Phone:** Refer to the official website for customer service phone number.

Please have your model number (3118-M1L BLK-SD) and proof of purchase ready when contacting support.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B078YD3RPZ>

More documents and user manuals: <https://manuals.plus/>