

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [Gator Frameworks](#) /

› [Gator Frameworks GFW-AV-LCD-15 Adjustable Quadpod LCD/LED TV Monitor Stand User Manual](#)

## Gator Frameworks GFW-AV-LCD-15

# Gator Frameworks GFW-AV-LCD-15 Adjustable Quadpod LCD/LED TV Monitor Stand User Manual

Model: GFW-AV-LCD-15

## INTRODUCTION

Thank you for choosing the Gator Frameworks GFW-AV-LCD-15 Adjustable Quadpod LCD/LED TV Monitor Stand. This manual provides essential information for the safe and efficient setup, operation, and maintenance of your new stand. Please read these instructions thoroughly before assembly and use.

## SAFETY INFORMATION

- Ensure all components are present and undamaged before assembly.
- Do not exceed the maximum weight capacity of 100 pounds (45.36 kg).
- Ensure the stand is placed on a stable, level surface.
- Always tighten all knobs and fasteners securely after making adjustments.
- Use caution when adjusting height, especially with a display mounted. It is recommended to have assistance.
- The red rings on the feet are designed to enhance visibility and prevent tripping in low-light conditions.

## PACKAGE CONTENTS

Verify that all parts are included before proceeding with assembly:

- Quad-Leg Base Assembly
- Main Support Pole
- Universal VESA Mounting Plate
- VESA Extension Arms (if required for larger patterns)
- Mounting Hardware Kit (various screws, washers, spacers)
- Cable Organization Clip

## SETUP AND ASSEMBLY

Follow these steps to assemble your Gator Frameworks TV Monitor Stand:

1. **Unfold the Quad-Leg Base:** Carefully spread the four legs of the base until they are fully extended and stable. Ensure the central locking mechanism is engaged.
2. **Attach the Main Support Pole:** Insert the main support pole into the top of the quad-leg base. Secure it by tightening the twist knob located on the base.
3. **Assemble VESA Mounting Plate:** Attach the universal VESA mounting plate to the top of the main support pole using the provided bolts and tools. Ensure it is firmly secured.
4. **Mount VESA Extension Arms (if needed):** For larger displays, attach the VESA extension arms to the main VESA plate to match your TV's hole pattern (100x100mm to 640x400mm).
5. **Attach VESA Brackets to TV:** Secure the VESA brackets (and extension arms if used) to the back of your LCD/LED TV using the appropriate screws and spacers from the hardware kit. Ensure these are tightened securely.
6. **Mount TV to Stand:** With assistance, carefully lift your TV and align the VESA brackets on the TV with the mounting plate on the stand. Slide the TV into place and secure it using the locking screws or mechanisms provided on the mounting plate.



Figure 1: Fully assembled Gator Frameworks GFW-AV-LCD-15 stand without a display.

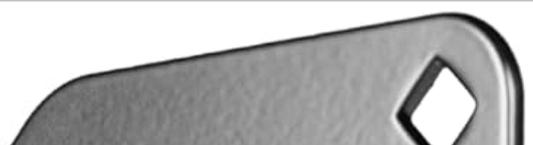




Figure 2: Detail of the universal VESA mounting plate.



*Figure 3: VESA extension arms for adapting to various display sizes.*

## OPERATING INSTRUCTIONS

Your Gator Frameworks stand offers flexible display options:

- **Height Adjustment:** Loosen the twist knob on the main support pole. Carefully raise or lower the display to the desired height (40.5" to 72"). Once at the desired height, insert the safety pin through the designated hole in the pole and retighten the twist knob securely.
- **Screen Orientation:** The VESA mount allows for both horizontal (landscape) and vertical (portrait) screen orientations. Adjust the display as needed before securing.
- **Cable Management:** Use the included cable organization clip to neatly route power and video cables along the stand's pole, ensuring a clean and professional appearance.



*Figure 4: Detail of the twist knob for height adjustment.*

*Video 1: This video demonstrates the features and usage of Gator Frameworks Quad-Pod Video Display Stands, including setup and adjustment.*

## **MAINTENANCE**

- **Cleaning:** Wipe down the stand with a soft, damp cloth. Avoid abrasive cleaners or solvents that could damage the finish.

- **Regular Inspection:** Periodically check all knobs, bolts, and connections to ensure they are tight and secure. Inspect the legs and pole for any signs of wear or damage.
- **Storage:** When not in use, the stand can be folded for compact storage. Ensure the display is removed before folding.



Figure 5: The stand can be folded for convenient storage and transport.

## TROUBLESHOOTING

- **Stand Instability:** Ensure all four legs are fully extended and resting evenly on the floor. Verify that the twist knob on the base is tightened.
- **Difficulty Adjusting Height:** Loosen the twist knob completely. Ensure the safety pin is fully removed before attempting to adjust. If the pole is stiff, check for any debris or obstructions.
- **TV Not Secure on Mount:** Double-check that all VESA screws are correctly installed and tightened. Ensure the locking mechanism on the mounting plate is engaged.

## SPECIFICATIONS

Model Number	GFW-AV-LCD-15
Brand	Gator Frameworks
Product Dimensions	40.5 x 5.8 x 5.8 inches (102.87 x 14.73 x 14.73 cm)
Item Weight	14.8 pounds (6.71 kg)

<b>Material</b>	Alloy Steel
<b>Compatible Devices</b>	Monitor, Television
<b>Max Screen Size Supported</b>	Up to 65 inches
<b>Max Weight Capacity</b>	100 pounds (45.36 kg)
<b>Adjustable Height Range</b>	40.5" to 72" (1092mm – 1854mm)
<b>VESA Compatibility</b>	100x100mm to 640x400mm

## **WARRANTY AND SUPPORT**

---

For specific warranty information regarding your Gator Frameworks GFW-AV-LCD-15 stand, please refer to the documentation provided with your purchase or visit the official Gator Frameworks website. For technical support, troubleshooting assistance, or replacement parts, please contact Gator Cases customer service directly.