

[Manuals.plus](#) /

> [UPBRIGHT](#) /

> UpBright 12V AC/DC Adapter Compatible with Cisco CS-CAM-PTZ4K= CS-CAM-PTZ4K EVI-X200C 74-126086-02 Webex PTZ 4K Color Video Conference Pan Tilt Zoom Camera PSU-12VDC-40W2 PSU-12VDC-40W2= Power Supply

UPBRIGHT PSU-12VDC-40W2

UpBright 12V AC/DC Adapter Instruction Manual

Compatible with Cisco CS-CAM-PTZ4K, EVI-X200C, Webex PTZ 4K Cameras

1. INTRODUCTION AND PRODUCT OVERVIEW

This manual provides essential information for the safe and effective use of your UpBright 12V AC/DC Adapter. This power supply is designed to provide reliable and stable power to compatible devices, including Cisco CS-CAM-PTZ4K, EVI-X200C, and Webex PTZ 4K UHD HDMI Color Video Conference Pan Tilt Zoom IPTV Cameras.

The adapter features a wide input voltage range (100-240VAC) for global compatibility and incorporates multiple safety protections, including Over Voltage Protection (OVP), Over Current Protection (OCP), and Short Circuit Protection (SCP), ensuring the safety of both the adapter and your connected equipment.

2. SAFETY INFORMATION

Please read and understand all safety instructions before using this product. Failure to follow these instructions may result in electric shock, fire, or damage to the product or connected devices.

- **FOR INDOOR USE ONLY:** This adapter is designed for indoor use in dry locations. Do not expose to rain, moisture, or extreme temperatures.
- **Proper Ventilation:** Ensure adequate ventilation around the adapter during operation. Do not cover the adapter or place it in an enclosed space that could restrict airflow.
- **Voltage Compatibility:** Connect the adapter only to power outlets within the specified input voltage range (100-240VAC).
- **Cable Integrity:** Do not use the adapter if the power cord or the adapter casing is damaged. Avoid bending, twisting, or stretching the cables excessively.
- **Disconnecting Power:** Always disconnect the adapter from the power outlet before cleaning or if it will not be used for an extended period.
- **Children and Pets:** Keep the adapter out of reach of children and pets.
- **Class 2 Power Supply:** This is a Class 2 power supply, indicating it has a low power output and is designed with safety features to prevent electric shock.

3. PACKAGE CONTENTS


Verify that all items are present and in good condition upon opening the package:

- UpBright 12V AC/DC Adapter Unit
- AC Power Cord (suitable for your region/country)



Image: The UpBright 12V AC/DC Adapter unit with its attached DC output cable and a separate AC input power cord. The adapter is black with product information printed on its top surface.

Come With A Suitable AC Power Cord (Only One) to Fit Your Country/Area

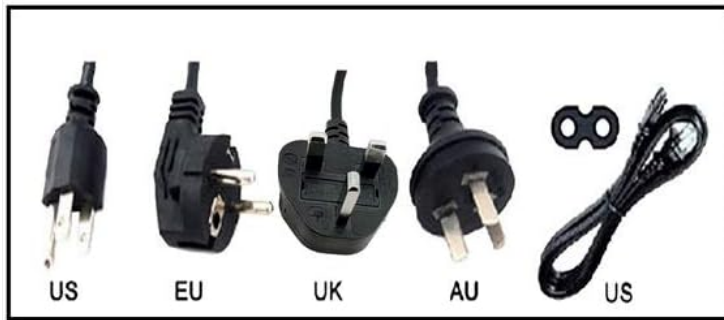

THIS PRODUCT COMES WITH A UPBRIGHT®

LIMITED WARRANTY CERTIFICATE
+ UpBright® LIMITED WARRANTY



COMES WITH A SUITABLE POWER CORD

Image: An illustration showing different types of AC power plugs (US, EU, UK, AU) that may be included with the adapter to fit various regional power outlets.

4. SETUP

Follow these steps to set up your AC/DC adapter:

1. **Connect the AC Power Cord:** Insert the appropriate end of the AC power cord into the input receptacle on the UpBright AC/DC Adapter.
2. **Connect to Device:** Plug the barrel connector of the adapter's DC output cable into the power input port of your compatible Cisco CS-CAM-PTZ4K, EVI-X200C, or Webex PTZ 4K Camera. Ensure the connection is firm and secure.
3. **Connect to Power Outlet:** Plug the other end of the AC power cord into a standard wall power outlet (100-240VAC, 50/60Hz).
4. **Verify Power:** Once connected, your device should receive power. Refer to your device's manual for specific power indicators.



Image: A side view of the UpBright AC/DC Adapter, illustrating the barrel connector for the DC output and the input port for the AC power cord. The cable is neatly secured with a hook-and-loop strap.

5. OPERATING INSTRUCTIONS

The UpBright 12V AC/DC Adapter operates automatically once connected to a power source and a compatible device. It is a "plug and play" device designed for continuous operation.

- Ensure all connections are secure before applying power.
- The adapter will provide a stable 12V DC output to your device.
- The built-in OVP, OCP, and SCP protections will automatically safeguard your device and the adapter from electrical anomalies. If a fault occurs, the adapter may temporarily cease operation to prevent damage.

6. MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your adapter.

- **Cleaning:** Disconnect the adapter from all power sources before cleaning. Use a soft, dry cloth to wipe the surface. Do not use liquid cleaners or aerosols.
- **Storage:** When not in use, store the adapter in a cool, dry place, away from direct sunlight and extreme temperatures. Coil the cables loosely to prevent damage.
- **Inspection:** Periodically inspect the adapter and cables for any signs of wear, cuts, or damage. If damage is found, discontinue use and replace the adapter.

7. TROUBLESHOOTING

If you encounter issues with your UpBright AC/DC Adapter, refer to the following common troubleshooting steps:

Problem	Possible Cause	Solution
No power to device	Adapter not properly connected to power outlet.	Ensure AC power cord is fully inserted into both the adapter and the wall outlet.
	Adapter not properly connected to device.	Ensure the barrel connector is fully inserted into the device's power port.
	Power outlet is not active.	Test the power outlet with another device.
	Device power input issue.	Verify the device's power requirements and functionality with its original power supply if available.
	Adapter protection (OVP/OCP/SCP) activated.	Disconnect the adapter from both the wall and the device for a few minutes, then reconnect.
Adapter feels warm	Normal operation under load.	A slight warmth is normal.
	Insufficient ventilation.	Ensure the adapter is in an open area with good airflow. Do not cover it. If it becomes excessively hot, disconnect immediately.

If the problem persists after following these steps, please contact UpBright customer support.

8. SPECIFICATIONS

Brand	UPBRIGHT
Model Number	PSU-12VDC-40W2 (Compatible with Cisco CS-CAM-PTZ4K Power Supply)
Input Voltage	100-240VAC, 50/60Hz
Output Voltage	12VDC
Connector Type	Barrel Round Connector
Color	Black
Product Dimensions	6 x 4 x 2 inches
Item Weight	9 ounces
Safety Features	OVP (Over Voltage Protection), OCP (Over Current Protection), SCP (Short Circuit Protection)

9. WARRANTY AND SUPPORT

UpBright stands behind the quality of its products. This AC/DC Adapter comes with a limited warranty.

- **Refund Policy:** UpBright offers a 30-day refund policy from the date of purchase.
- **Exchange Policy:** The product is eligible for a 24-month exchange policy.
- **Warranty Certificate:** This product comes with an UpBright Limited Warranty Certificate.

For warranty claims, technical support, or any inquiries, please contact UpBright customer service through their official channels or the retailer where the product was purchased.



Image: The UpBright AC/DC Adapter showing its product label with model number, input/output specifications, and safety certifications (FC, CE).

© 2023 UpBright. All rights reserved.
Product specifications are subject to change without notice.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for

conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question