

Sunrosa [48" W × 76" H] Matte Black

Sunrosa Semi-Frameless Glass Shower Door User Manual

Model: [48" W × 76" H] Matte Black

This comprehensive manual provides detailed instructions for the safe and effective installation, operation, and maintenance of your Sunrosa Semi-Frameless Glass Shower Door. Please read carefully before beginning installation.

1. IMPORTANT SAFETY INFORMATION

For your safety and to ensure proper installation, please observe the following:

- It is highly recommended that at least two people install this product due to the weight and size of the glass panels.
- Always wear appropriate personal protective equipment, including gloves and safety goggles, during installation.
- Handle glass panels with extreme care. Tempered glass is strong but can shatter if struck at the edges.
- Ensure all mounting surfaces are structurally sound and capable of supporting the weight of the shower door.
- Read all instructions thoroughly before beginning any steps.

2. PACKAGE CONTENTS

Verify that all components are present before starting installation:

- Tempered Glass Panels (Fixed and Sliding)
- Top Rail and Bottom Rail
- Wall Posts / Wall Brackets
- Rollers and Guides
- Door Handle
- Seal Strips (Side and Bottom)
- Mounting Hardware (Screws, Wall Plugs, Allen Key)
- Installation Manual (this document)

3. REQUIRED TOOLS

The following tools are necessary for installation:

- Measuring Tape
- Pencil
- Level
- Drill (with 6mm and 3.2mm bits)
- Hammer
- Screwdriver (Phillips head)
- Utility Knife
- Caulking Gun and Sealant
- Adjustable Wrench

4. SETUP AND INSTALLATION GUIDE

Follow these steps carefully for a successful installation. Refer to the provided video for visual guidance.



Official Installation Video: Sunrosa Single Sliding Tub Shower Door. This video provides a step-by-step visual guide for the installation process.

4.1. Pre-Installation Measurements

Before starting, confirm your shower opening dimensions. This model is adjustable from 47 2/8" to 48" in width and 76" in height. The walk-in width is 18 6/8".



Diagram showing the adjustable width (47 2/8" - 48"), height (76"), and walk-in width (18 6/8") of the shower door.

4.2. Wall Post Installation

1. Place the wall post against the wall, ensuring it is approximately 29.7mm from the edge of the shower opening. Use a level to ensure it is perfectly vertical.
2. Mark the drill holes on the wall using a pencil through the pre-drilled holes in the wall post.
3. Use a 6mm drill bit to drill holes at the marked locations.
4. Insert the wall plugs into the drilled holes, tapping gently with a hammer until flush with the wall surface.
5. Fasten the wall post to the wall using the provided ST4x35 screws.

4.3. Glass Panel and Rail Assembly

6. Insert the magnetic strip into the wall post.
7. Carefully slide the fixed glass panel into the wall post, leaving a 0-20mm space. Use the provided strip to push it into the gap.

8. Install the wall bracket onto the wall post using ST5x35 screws. Connect the top rail to the wall bracket and tighten with the 3mm allen key.
9. Hang the exterior fixed door panel onto the top rail from the outside of the shower. Tighten the fasteners using the allen key.
10. Place the bottom guide next to the exterior fixed door panel and mark the floor with a pencil. Drill a 6mm hole and insert a wall plug. Fasten the bottom guide with an ST4x25 screw.
11. Hang the interior door panel onto the top rail from the inside of the shower. Install the rollers using the wrench.
12. Ensure both glass panels are perpendicular to the floor. If not, adjust the rollers using the wrench until they are.
13. Install the remaining part of the pulley system.
14. Install the stopper using the ST4x12 screw.

4.4. Final Touches

15. Cut the bottom rail and shower door bottom strip according to the position of the bottom guide to the wall. Push the shower door bottom strip into the bottom rail.
16. Apply glass glue to the bottom of the bottom rail and place it in front of the glass panel.
17. Install the door handle as illustrated.
18. Cut the shower door side seal according to the top rail position and install it to the glass panel. Do not touch the top rail after cutting.
19. Apply caulking sealant to all joints and seams where water might escape. Ensure a continuous, watertight seal.

Allow the sealant to cure for at least 24 hours before using the shower to ensure a proper seal.

5. OPERATING INSTRUCTIONS

Your Sunrosa Semi-Frameless Glass Shower Door features a smooth single-sliding mechanism for easy access.

- To open the door, gently slide the movable glass panel along the top and bottom rails using the handle.
- To close the door, slide the panel back until it meets the fixed panel and the magnetic seals engage.
- The door is designed for reversible installation, allowing for opening from either the left or right side to fit your specific bathroom layout.



The shower door can be installed for either left or right-hand opening, offering flexibility for your bathroom design.


6. MAINTENANCE AND CARE

Proper care will ensure the longevity and pristine appearance of your shower door.

- **Glass Cleaning:** Clean the tempered glass regularly with a soft cloth and a non-abrasive glass cleaner. Avoid harsh chemicals or abrasive pads that can scratch the glass or damage protective coatings.
- **Frame and Hardware:** Wipe down the matte black stainless steel frame and hardware with a soft, damp cloth. Dry immediately to prevent water spots. Do not use abrasive cleaners or scouring pads.
- **Seals:** Periodically check the seal strips for wear or damage. Replace if necessary to maintain water containment.
- **Rollers and Tracks:** Keep the top and bottom tracks free of soap scum, hair, and debris to ensure smooth operation of the sliding door.

What should I do if I receive a product with an issue?

3 simple steps to resolve it

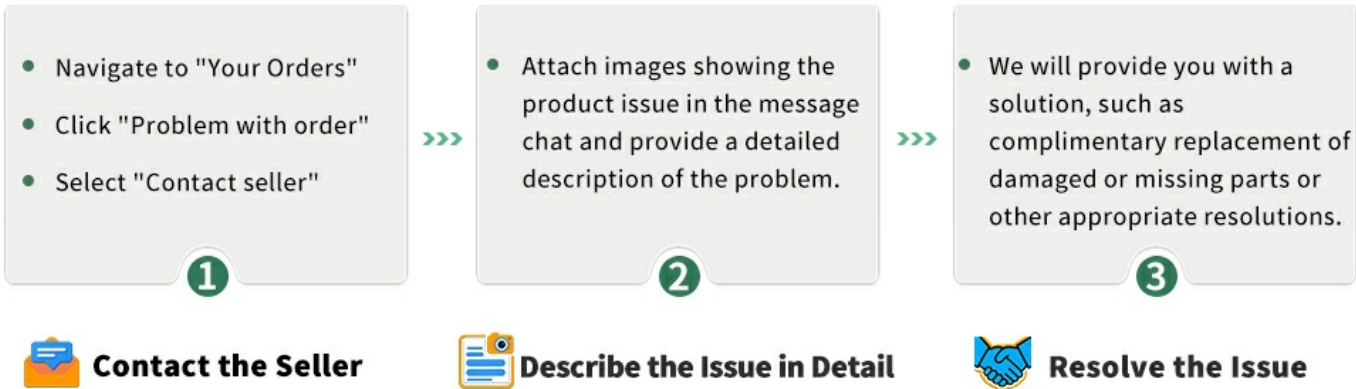

Feature	Detail
Brand	Sunrosa
Model Number	shower door
Dimensions (W x H)	47 2/8" - 48" W x 76" H
Glass Thickness	5/16" (8mm) Tempered Glass
Material	Glass, Stainless Steel Frame
Color	Matte Black
Item Weight	119 Pounds
Assembly Required	Yes

9. WARRANTY AND CUSTOMER SUPPORT

Sunrosa is committed to your satisfaction. If you are not completely satisfied with your product or receive a defective item, please contact us immediately.

9.1. How to Resolve Product Issues:

- Contact the Seller:** Navigate to "Your Orders" on Amazon, click "Problem with order," and select "Contact seller."
- Describe the Issue in Detail:** Attach images showing the product issue in the message chat and provide a detailed description of the problem.
- Resolution:** We will provide you with a solution, such as a complimentary replacement of damaged or missing parts, or other appropriate resolutions.



Visual guide for contacting customer support and resolving product issues in three simple steps.

For any questions or concerns, please do not hesitate to reach out to Sunrosa customer service.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0CPPQ54QL>

More documents and user manuals: <https://manuals.plus/>