

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [PUTORSEN](#) /

> [PUTORSEN Premium Height Adjustable Monitor Wall Mount \(Model B0CPXHP66Q\) User Manual](#)

PUTORSEN B0CPXHP66Q

PUTORSEN Premium Height Adjustable Monitor Wall Mount User Manual

Model: B0CPXHP66Q

Brand: PUTORSEN

1. INTRODUCTION

This user manual provides detailed instructions for the safe and efficient installation, operation, and maintenance of your PUTORSEN Premium Height Adjustable Monitor Wall Mount. Please read this manual thoroughly before installation and keep it for future reference. This mount is designed to securely hold monitors from 13 to 35 inches, weighing up to 22 lbs, with VESA 75x75mm or 100x100mm patterns.

2. PACKAGE CONTENTS

Verify that all components are present and undamaged before proceeding with installation. If any parts are missing or damaged, please contact customer support.

- 1 x PUTORSEN Monitor Wall Mount
- 1 x Hardware Kit (screws, anchors, washers)
- 1 x Instruction Manual (this document)
- 4 x Cable Ties for cable management



Image: Main components of the PUTORSEN Monitor Wall Mount, including the mount itself and cable ties for organization.

3. SPECIFICATIONS

Brand	PUTORSEN
Model	B0CPXHP66Q
Screen Size Compatibility	13" to 35" (standard and ultrawide screens)
Weight Capacity	Up to 22 lbs (10 kg)
VESA Compatibility	75x75mm, 100x100mm
Mounting Type	Wall Mount (Wood studs, solid wall, brick wall)
Movement Type	Articulating (Tilt, Swivel, Rotation, Height Adjustment)
Material	Acrylonitrile Butadiene Styrene (ABS), Alloy Steel, Aluminum

Color	Black
Wall Distance	Low profile, approximately 2 inches from the wall

PRODUCT DIMENSION

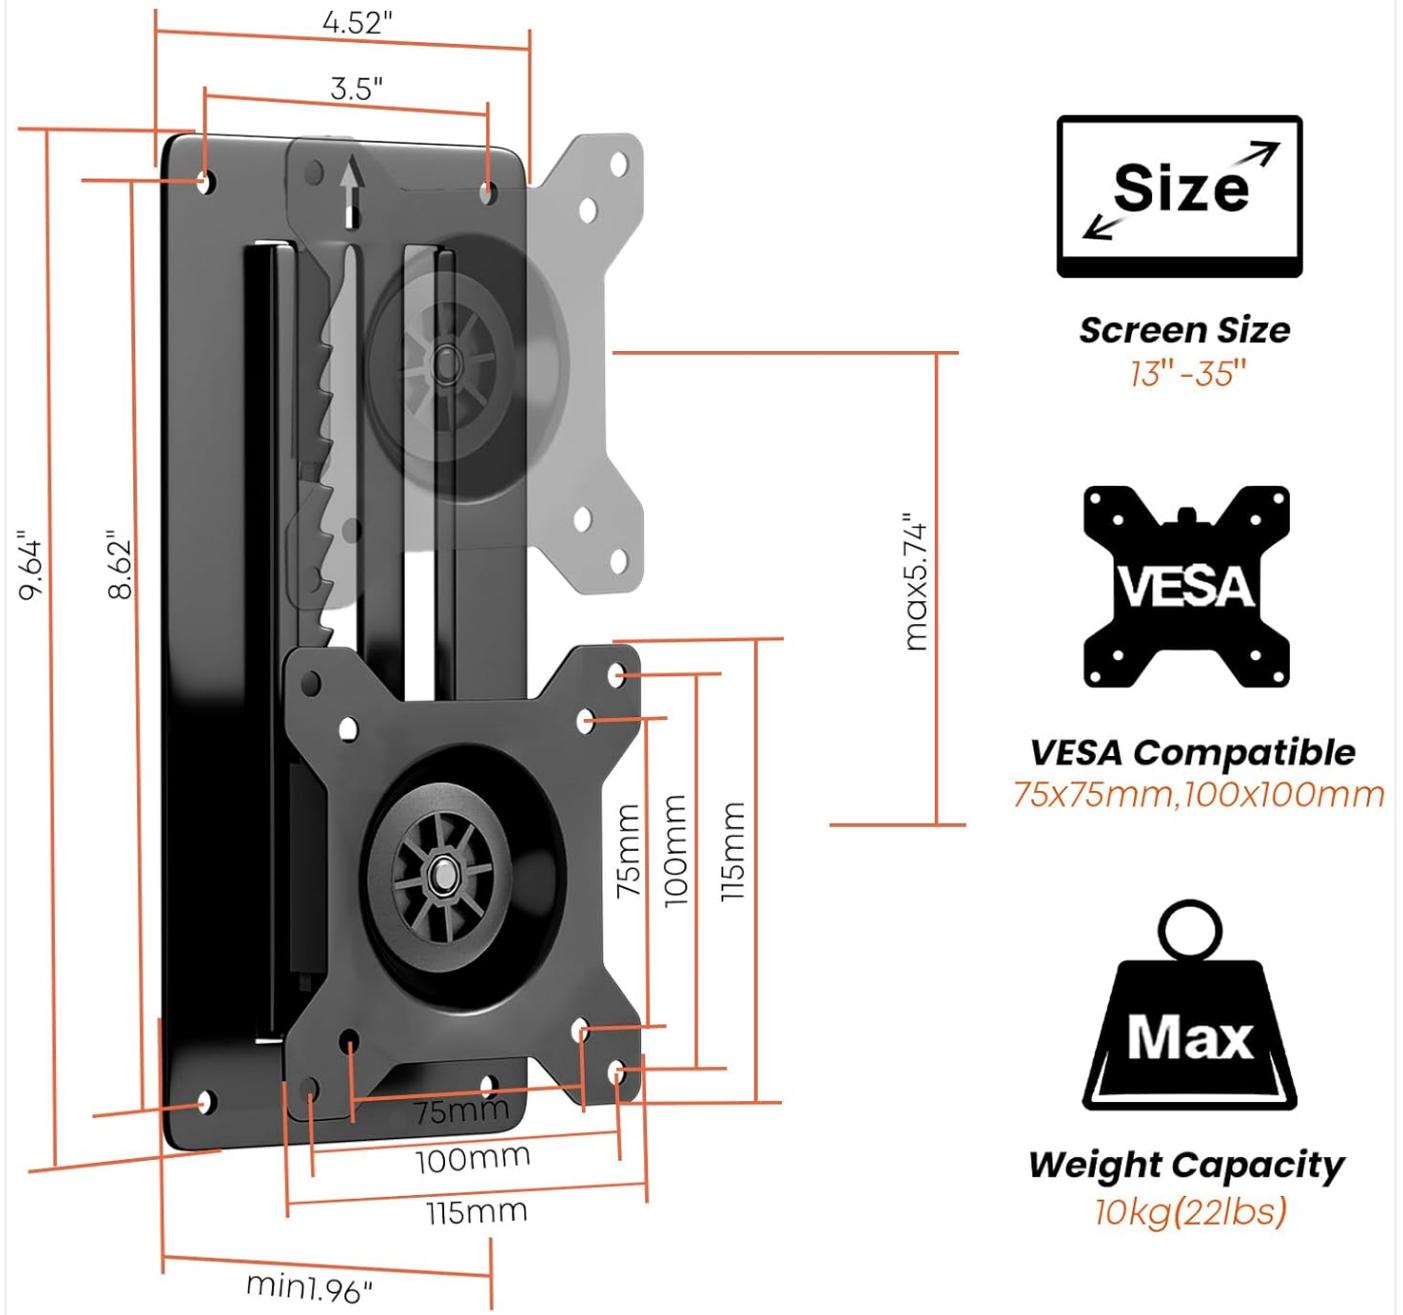


Image: Detailed product dimensions, screen size compatibility (13"-35"), VESA compatibility (75x75mm, 100x100mm), and maximum weight capacity (10kg/22lbs).

4. SETUP & INSTALLATION

Careful installation is crucial for the safety and stability of your monitor. Follow these steps precisely.

4.1 Tools Needed (Not Included)

- Phillips Screwdriver
- Drill
- Bubble Level

- Pencil

4.2 Installation Video Guide



Video: A detailed installation guide for the PUTORSEN Height Adjustable Monitor Wall Mount, demonstrating the steps for secure mounting and adjustment.

4.3 Wall Mounting Steps

1. **Select Location:** Choose a suitable wall location. Ensure it can support the weight of the mount and your monitor. This mount is compatible with wood studs, solid walls, or brick walls.
2. **Mark Drill Holes:** Position the wall plate at the desired height. Use a bubble level to ensure it is perfectly horizontal. Mark the four drill hole locations with a pencil.
3. **Drill Holes:**
 - For wood studs: Drill pilot holes.
 - For solid concrete/brick walls: Drill holes of 8mm (5/16") diameter and 55mm (2.2") depth. Insert wall anchors (W-D) into the drilled holes.
4. **Attach Wall Plate:** Align the wall plate with the drilled holes. Secure it to the wall using the appropriate screws (W-A for wood studs, W-C with W-D anchors for concrete/brick) and a Phillips screwdriver. Ensure it is firmly attached.

GETTING HEIGHTADJUSTABLE & SPACE SAVING

*Especially for limited spaces
(Only 2" from the wall)*



Image: Examples of the monitor wall mount installed in different environments such as a study, meeting room, reception, kitchen, dining room, and hospital room, showcasing its versatility.

4.4 Attaching Monitor to Mount

1. **Attach VESA Plate to Monitor:** Secure the VESA plate (the part that attaches to the monitor) to the back of your monitor using the appropriate M-A or M-B screws and M-C washers from the hardware kit. Ensure the screws are tightened securely but do not overtighten.
2. **Hang Monitor:** Carefully lift the monitor with the attached VESA plate and align it with the wall-mounted bracket. Slide the VESA plate onto the bracket until it clicks into place.
3. **Secure Monitor:** Tighten the security screw on the VESA plate to prevent accidental dislodging.

FULLY ADJUSTABLE

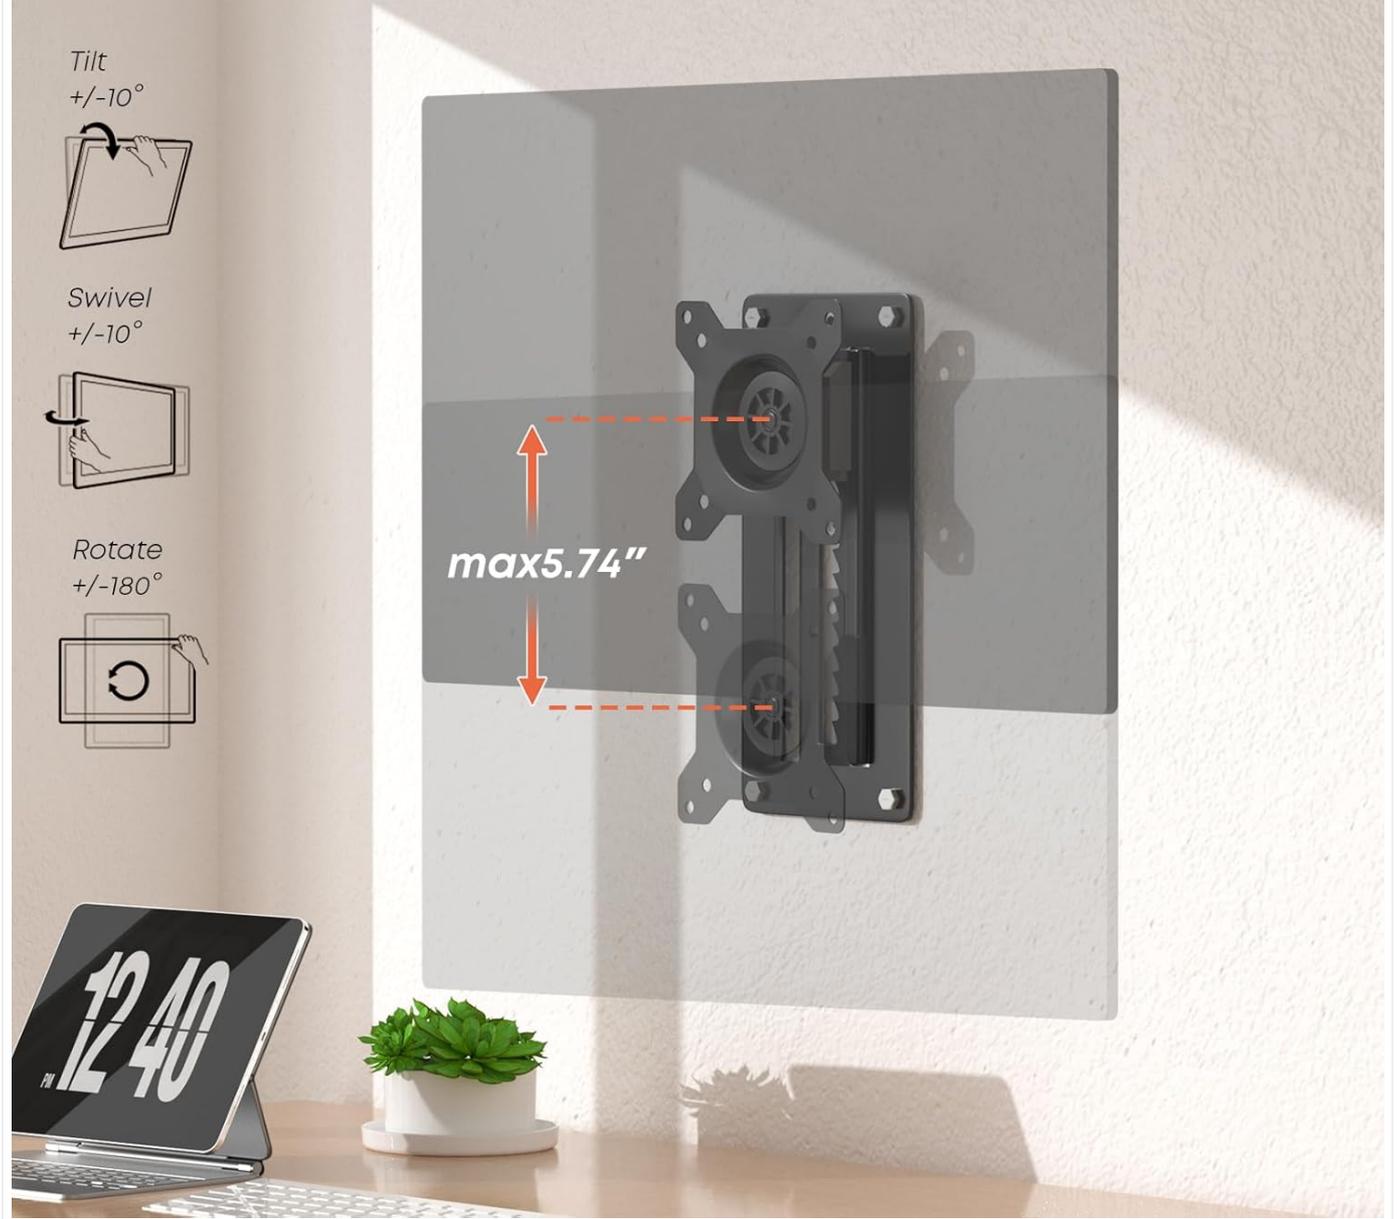


Image: The monitor mount demonstrating its full adjustability, including tilt ($\pm 10^\circ$), swivel ($\pm 10^\circ$), and rotation ($\pm 180^\circ$), along with vertical height adjustment up to 5.74 inches.

5. OPERATING INSTRUCTIONS

Your PUTORSEN monitor wall mount offers various adjustments for optimal viewing comfort.

- **Height Adjustment:** This mount features an innovative toothed track system for height adjustment.
 - To *raise* the monitor: Gently lift the monitor until the latch clicks into place at your desired level.
 - To *lower* the monitor: Lift the monitor all the way up to disengage the latch, then bring it down to the bottom and slowly slide it to the desired position. Ensure there is enough space above the mount for this operation.
- **Tilt Adjustment:** The monitor can be tilted ± 10 degrees to reduce glare and achieve a comfortable viewing angle.
- **Swivel Adjustment:** Swivel the monitor ± 10 degrees horizontally to share your screen or adjust your viewing position.
- **Rotation Adjustment:** Rotate the monitor ± 180 degrees to switch between landscape and portrait orientation.
- **Cable Management:** Use the provided zip ties to neatly route and secure cables along the mount arm and wall, maintaining a clean workspace.

CUSTOMIZED SCREENS

Combination Freely



Warm Tip:

If you install two monitors, please measuring out the distance between two monitors carefully as close to perfectly level and parallel to each other as possible;

Image: Examples of customized screen setups, including two monitors mounted side-by-side and two monitors stacked vertically, demonstrating flexible configuration options.

6. MAINTENANCE

Regular maintenance ensures the longevity and safe operation of your monitor mount.

- **Cleaning:** Wipe the mount with a soft, dry cloth. Avoid abrasive cleaners or solvents that could damage the finish.
- **Check Connections:** Periodically check all screws and connections to ensure they remain tight and secure. Retighten if necessary.
- **Inspect for Wear:** Inspect the mount for any signs of wear, damage, or loose parts. If any issues are found, discontinue use and contact customer support.

7. TROUBLESHOOTING

If you encounter issues with your monitor mount, refer to the following common problems and solutions:

- **Monitor is not holding height:**

- Ensure the monitor was lifted all the way up to disengage the latch before attempting to lower it.
- Verify that the monitor weight is within the specified capacity (up to 22 lbs).
- Check if the height adjustment mechanism is free from obstructions.
- If the issue persists, contact customer support for assistance.

- **Mount feels unstable:**

- Recheck all wall mounting screws and monitor attachment screws to ensure they are fully tightened.
- Confirm that the wall material is appropriate for the chosen anchors and screws.
- Ensure the monitor's VESA pattern is correctly aligned and secured to the mount.

- **Difficulty with tilt/swivel/rotation:**

- Check for any overtightened screws that might be restricting movement.
- Ensure no cables are snagged or preventing free movement.

8. WARRANTY & SUPPORT

PUTORSEN stands behind the quality of its products. If you require assistance, have questions, or need to report a defect, please contact our customer support team.

Contact Information: Please refer to the contact details provided with your product packaging or visit the official PUTORSEN website for support.

Warranty: Information regarding the product warranty period and terms can be found in the documentation included with your purchase or on the PUTORSEN website.

