

EaseLife 0503

EaseLife 28x80in Pocket Door Frame Kit Instruction Manual

Model: 0503

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your EaseLife 28x80in Pocket Door Frame Kit with Two-Way Soft Close Mechanism. Please read all instructions carefully before beginning installation to ensure proper function and safety. This kit is designed for 2x4 stud walls and accommodates doors between 24 and 28 inches wide.

PRODUCT FEATURES

- **Commercial Grade Construction:** Full pocket door frame kit designed for 2x4 stud walls. Features a high-precision aluminum box track for concealed, smooth, and durable sliding operation. The track and wood slot kit can be cut to fit door panels from 24 to 28 inches wide.
- **Two-Way Soft Close Mechanism:** Includes a double-sided soft closing mechanism that ensures the door slides smoothly and quietly. This mechanism has been tested for over 100,000 cycles.
- **Quick-Release Locking Tab:** Facilitates easy installation and removal of the door panel without needing to detach the entire door from the rail.

PACKAGE CONTENTS

Verify that all components listed below are present in your package. **Note: The door panel is NOT included.**

- 1 x 56-inch Aluminum Track with Wood Slot
- 4 x Square Uprights for 80-inch Door
- 1 x Double-Sided Soft Close Mechanism
- 1 x Set of Rollers
- 2 x Door Stops



Soft Close Mechanism

Soft close roller slides smoothly and quietly.
The quick-release locking tab makes it easy to install or remove the door without the need to run the door panel off the rail.



Image: All components included in the EaseLife Pocket Door Frame Kit, excluding the door itself.

SPECIFICATIONS

Model Number	0503
Kit Size	28x80 inches
Item Weight	23.9 pounds
Product Dimensions	3 x 4.3 x 80 inches
Compatible Door Width	24 to 28 inches
Compatible Door Thickness	1 to 1-3/4 inches (25mm to 45mm)
Maximum Door Weight Capacity	88 lbs
Material	Aluminum
Installation Method	Wall-Mounted

Usage	Commercial/Residential
-------	------------------------

SETUP AND INSTALLATION

Proper installation is crucial for the functionality and longevity of your pocket door frame kit. We recommend reviewing the provided video guide in conjunction with these instructions.

Pre-Installation Considerations:

- **Rough Opening Width:** Calculate the rough opening width as $2 \times \text{Door Width} + 1 \text{ inch}$
- Ensure your wall studs are 2x4 inches for compatibility.
- The kit is designed for an 80-inch high door.

Package List

Door not included,
track can be cut to fit 24"x80"-30"x80" door

Preview of the installation

Image: Diagram illustrating the required rough opening dimensions, door width, height, thickness, and weight capacity for installation.

Installation Video Guide:

For a visual step-by-step guide, please watch the official installation video:

Video: Official EaseLife installation guide for the Pocket Door Frame Kit with Soft Close mechanism. This video demonstrates the complete assembly and installation process.

General Installation Steps (Refer to video for details):

1. Prepare the wall opening according to the calculated rough opening width.
2. Assemble the aluminum track with the wood slot. The track can be cut to size if necessary to fit your door width (24-28 inches).
3. Install the square uprights into the wall structure, ensuring they are plumb and level.
4. Mount the assembled track and wood slot securely to the top of the frame.
5. Install the soft close mechanism onto the track.
6. Attach the rollers to your door panel.
7. Carefully hang the door panel onto the track, engaging the rollers with the soft close mechanism.
8. Install the door stops to prevent the door from over-traveling.
9. Test the door's operation and soft close functionality.

OPERATING INSTRUCTIONS

The EaseLife Pocket Door Frame Kit features a two-way soft close mechanism for smooth and quiet operation.

Soft Close Functionality:

- The soft close mechanism engages automatically as the door approaches its fully open or fully closed position, gently slowing it down to prevent slamming.
- To operate, simply push or pull the door. The mechanism will dampen the door's movement near the end of its travel.

Door Removal/Installation (Quick-Release Tab):

The quick-release locking tab allows for easy removal or installation of the door panel without disassembling the entire track system.

- To remove the door, locate the quick-release tabs on the rollers. Disengage these tabs according to the mechanism's design (refer to the installation video for visual guidance).
- Once disengaged, the door can be lifted off the track.
- To reinstall, align the rollers with the track and engage the quick-release tabs until they lock securely.

Rough opening width: $2 \times \text{door width} + 1''$

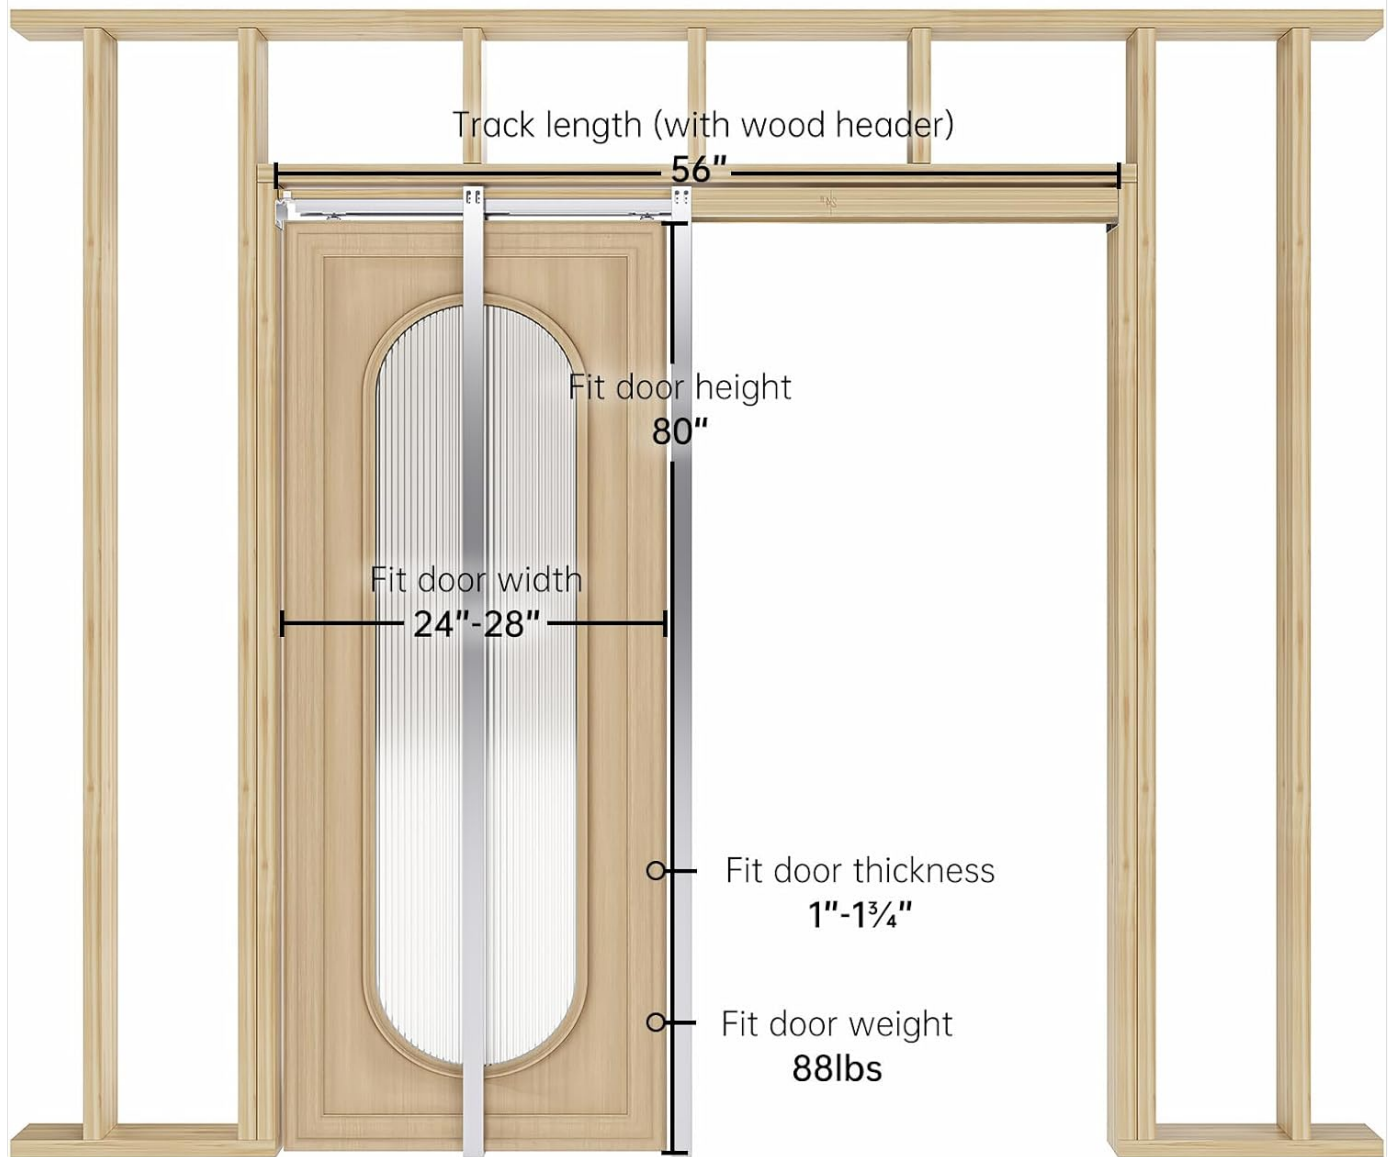


Image: Close-up of the soft close mechanism, highlighting the quick-release locking tab for easy door panel management. Ensure the mechanism is properly engaged for optimal performance.

MAINTENANCE

Regular maintenance ensures the smooth and quiet operation of your pocket door system.

- **Cleaning:** Periodically clean the aluminum track to remove dust and debris that may accumulate. Use a soft, dry cloth or a vacuum cleaner with a brush attachment.
- **Lubrication:** If the door's movement becomes less smooth over time, apply a silicone-based lubricant to the rollers and inside the track. Avoid oil-based lubricants as they can attract dust.
- **Hardware Check:** Annually inspect all screws and fasteners to ensure they are tight. Re-tighten any loose hardware to maintain stability and safety.
- **Soft Close Mechanism:** Ensure the soft close mechanism is free of obstructions and operating correctly. If it appears to be malfunctioning, refer to the troubleshooting section or contact support.

TROUBLESHOOTING

If you encounter issues with your pocket door system, try the following troubleshooting steps:

- **Door is difficult to slide:**
 - Check the track for debris or obstructions. Clean thoroughly.
 - Apply silicone lubricant to the rollers and track.
 - Verify that the door is properly aligned and not rubbing against the frame. Adjust if necessary.
- **Soft close mechanism not engaging or working properly:**
 - Ensure the quick-release locking tabs on the rollers are fully engaged.
 - Check for any physical obstructions preventing the mechanism from operating.
 - Confirm the mechanism is correctly installed and positioned on the track.
- **Door is noisy during operation:**
 - Clean and lubricate the track and rollers.
 - Inspect rollers for wear or damage; replace if necessary.
 - Ensure all mounting hardware is tight.

If these steps do not resolve the issue, please contact EaseLife customer support.

WARRANTY AND SUPPORT

EaseLife specializes in sliding door and hardware products and is committed to customer satisfaction.

- **Warranty:** Specific warranty details may vary. Please refer to your purchase documentation or contact EaseLife customer service for precise warranty information.
- **Customer Support:** If any parts are missing or broken, or if you require professional installation guidance, please contact EaseLife customer service. Our team is available online to assist you.

For assistance, please visit the [EaseLife Store on Amazon](#) or refer to the contact information provided with your product.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question