Decoraport DK-D-N031-T

Decoraport D-HYH LED Bathroom Mirror User Manual

Model: DK-D-N031-T

1. Introduction

This manual provides detailed instructions for the installation, operation, and maintenance of your Decoraport D-HYH LED Bathroom Mirror, Model DK-D-N031-T. This 55 x 36 inch wall-mounted mirror features integrated LED lighting, an anti-fog function, dimmable light control, and Bluetooth audio connectivity. Please read this manual thoroughly before installation and use to ensure proper function and safety.

2. Safety Information

Please observe the following safety precautions to prevent injury or damage to the product:

- Ensure the power supply is disconnected before installation or maintenance.
- Installation should be performed by a qualified electrician if hardwiring is chosen.
- Do not attempt to disassemble or modify the mirror.
- Avoid exposing the mirror to excessive moisture or direct water spray beyond normal bathroom use.
- Handle the mirror with care to prevent breakage.
- Keep packaging materials away from children.

3. Package Contents

Verify that all components are present before beginning installation:

- LED Bathroom Mirror (Model DK-D-N031-T)
- Installation Kit (includes mounting hardware)
- User Manual

4. Setup and Installation

The mirror can be mounted horizontally or vertically. Ensure the wall can support the mirror's weight (approximately 24.9 kg / 55 lbs).

1. **Choose Mounting Orientation:** Decide whether to mount the mirror horizontally or vertically.

2. **Mark Mounting Points:** Using the provided template or by measuring the mirror's mounting points, mark the desired locations on the wall. Ensure the marks are level.
3. **Drill Holes:** Drill pilot holes at the marked locations. Insert wall anchors if necessary.
4. **Secure Mounting Hardware:** Attach the mounting brackets or cleats securely to the wall using the screws provided in the installation kit.
5. **Electrical Connection:**
    - **Plug-in:** If using the plug-in option, ensure the outlet is within reach and properly grounded.
    - **Hardwire:** For hardwired installation, turn off power at the circuit breaker. Connect the mirror's electrical wires to the corresponding household wiring (Live, Neutral, Ground) according to local electrical codes. This step should be performed by a qualified electrician.
6. **Hang the Mirror:** Carefully lift the mirror and align its hanging mechanism with the wall-mounted hardware. Ensure it is securely seated.
7. **Restore Power:** Once the mirror is securely mounted and wired, restore power at the circuit breaker.



Figure 1: The mirror can be installed in either horizontal or vertical orientation to suit your space.

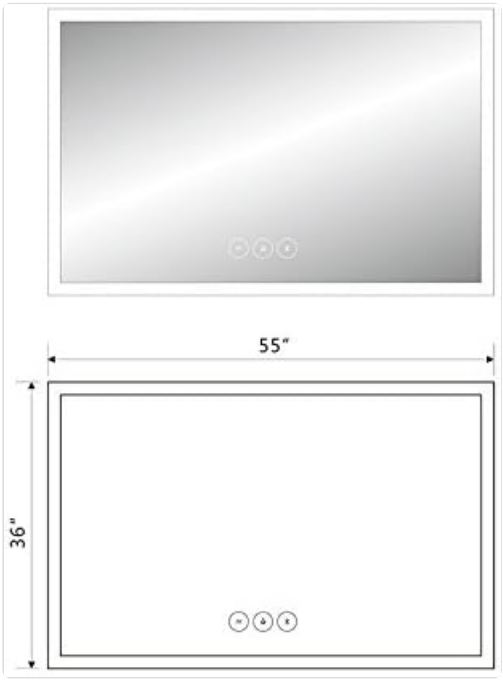


Figure 2: Dimensional diagram of the mirror, illustrating its 55-inch width and 36-inch height.

5. Operating Instructions

Your LED bathroom mirror features intuitive touch controls for its various functions.

5.1. LED Lighting Control

- **Turn On/Off:** Lightly touch the power icon on the mirror surface to turn the LED lights on or off.
- **Dimming:** When the lights are on, press and hold the power icon to adjust the brightness. The light will cycle through brightness levels (10% to 100%). Release when the desired brightness is reached. The mirror features brightness memory, retaining your last setting.



Figure 3: Touch sensor controls for adjusting LED light brightness and activating the anti-fog feature.

5.2. Anti-Fog Function

- **Activate/Deactivate:** Touch the anti-fog icon (often depicted as steam lines) on the mirror surface to turn the anti-fog heating pad on or off. This feature helps maintain a clear reflection in humid conditions.



Figure 4: Activation of the anti-fog function with a single touch, clearing condensation from the mirror surface.

5.3. Bluetooth Audio

- **Pairing:** Activate Bluetooth on your mobile phone or computer. Search for available devices and select the mirror's Bluetooth name (e.g., "Mirror Audio" or similar). Once paired, you can stream audio directly to the mirror's integrated speakers.
- **Audio Playback:** Control music playback (play, pause, skip tracks, volume) directly from your connected device. The mirror provides 360-degree surround sound.

5.4. Wall Switch Compatibility

The mirror supports connection to a wall switch. When connected to a wall switch, the mirror will retain its last brightness setting when the wall switch is toggled. However, the mirror's touch button must still be pressed to activate the light after the wall switch is turned on.



Figure 5: Overview of key features including wall switch support and brightness memory.

6. Maintenance

- **Cleaning:** Use a soft, damp cloth and a mild glass cleaner to clean the mirror surface. Avoid abrasive cleaners or harsh chemicals that could damage the mirror or its coatings.
- **LED Lifespan:** The integrated LED lights have an estimated lifespan of approximately 50,000 hours, providing long-lasting illumination.
- **Frame Care:** The aluminum frame with moisture-proof stripe requires minimal maintenance. Wipe with a soft, dry cloth as needed.



Figure 6: Details on the durable LED lighting, emphasizing its long lifespan and high brightness.

7. Troubleshooting

Problem	Possible Cause	Solution
LED lights do not turn on.	No power supply; loose connection; touch sensor malfunction.	Check power outlet/circuit breaker. Ensure all electrical connections are secure. Try touching the sensor again.
Anti-fog function not working.	Anti-fog function not activated; power issue.	Ensure the anti-fog icon is touched to activate. Check power supply.
Bluetooth cannot connect or audio is distorted.	Mirror not in pairing mode; device too far; interference.	Ensure Bluetooth is enabled on your device and the mirror. Move closer to the mirror. Disconnect and re-pair the device.

Problem	Possible Cause	Solution
Light does not turn on with wall switch.	Expected behavior; touch sensor required for activation.	The wall switch provides power, but the mirror's touch sensor must be pressed to activate the light, even if the wall switch is on. The mirror will remember the last brightness setting.

8. Specifications

Feature	Detail
Brand	Decoraport
Model Number	D-N031-T
Product Dimensions	139.7L x 91.4W Centimetres (55 x 36 inches)
Item Weight	24.9 kg (55.0 lbs)
Material	Glass, Aluminum Frame
Voltage	100-240V; 12V (50/60HZ)
Power	100W
Lumen	5670LM
Color Temperature	6000K (White Light)
Special Features	Fogless, Lighted, Touch Sensor, Dimmable, Bluetooth Audio
LED Lifespan	Approx. 50,000 hours
Mounting Type	Wall Mount (Horizontal or Vertical)

9. Warranty and Support

For warranty information or technical support, please refer to the retailer where the product was purchased or contact Decoraport customer service. Keep your purchase receipt as proof of purchase.
Contact information for Decoraport may be available on their official website or through the retailer.

© 2026 Decoraport. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question