

[manuals.plus](#) /

› [Lorex](#) /

› [Lorex 4K Analog Security Camera Instruction Manual](#)

**Lorex C882DA**

# Lorex 4K Analog Security Camera Instruction Manual

Model: C882DA

Brand: Lorex

## Sections:

[Introduction](#) [Setup](#) [Operating](#) [Maintenance](#) [Troubleshooting](#) [Specifications](#) [Warranty & Support](#)

## 1. INTRODUCTION

This manual provides comprehensive instructions for the installation, operation, and maintenance of your Lorex 4K Analog Security Camera. This camera is designed for both outdoor and indoor surveillance, offering advanced features to enhance your security system.



Figure 1: Front view of the Lorex 4K Analog Security Camera, showing the lens and integrated LED light.

## Key Features:

- **Smart Active Deterrence:** Features a motion-activated LED warning light and remote-activated siren options to deter intruders.
- **HD 4K Camera System:** Delivers 4K video resolution with realistic color representation and superior digital zoom capabilities for clear imaging in various lighting conditions.
- **Color Night Vision:** Provides enhanced nighttime clarity and better video evidence with Color Night Vision (requires ambient lighting) and a wide 111° field of view. Long-range IR night vision offers clear black and white images in darker environments.
- **Outdoor Security System:** Constructed with durable aluminum alloy housing, the camera is weatherproof rated (IP65) to withstand temperatures from -40°F to 131°F.
- **Compatibility:** Designed for use with Lorex D841, D841B, D861, LHV5100, and LHV5100W series recorders.

# Experience Sharper Video and Superior Digital Zoom Capabilities With 4K Ultra HD




Figure 2: Visual comparison demonstrating the sharper video and superior digital zoom capabilities of 4K Ultra HD.

# Night Time Clarity With Color Night Vision



Figure 3: Comparison showing enhanced nighttime clarity with Color Night Vision versus traditional infrared night vision.

**LOREX®**

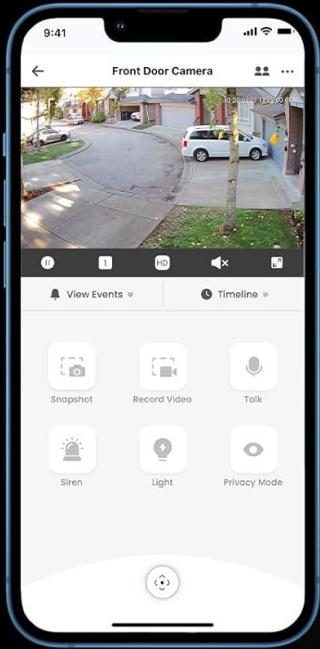

## Active Deterrence

**Motion-activated LED warning lights  
& a remotely activated siren**

Figure 4: Illustration of Active Deterrence, including motion-activated LED warning lights and remote siren activation via a mobile app.

# Robust Metal Housing Ensures Weatherproof Durability



**LOREX®**



Figure 5: Close-up of the camera's robust metal housing, highlighting its weatherproof durability (IP65 rating).

## 2. SETUP

Follow these steps to set up your Lorex 4K Analog Security Camera system:

- 1. Unpack Components:** Verify all included components are present: camera, mounting kit, power adapter, extension cable, and quick start guide.
- 2. Mounting the Camera:** Choose a suitable location for your camera, ensuring it has a clear field of view. Use the provided mounting kit to securely attach the camera to a wall or ceiling. The camera is designed for both indoor and outdoor use.
- 3. Connecting to DVR/NVR:** Connect the camera to your compatible Lorex DVR/NVR (D841 / D841B / D861 / LHV5100 / LHV5100W series) using the provided extension cable. Ensure a secure connection.
- 4. Power Connection:** Connect the camera's power adapter to a regular power outlet.
- 5. DVR/NVR Setup:** Connect your DVR/NVR to a display (e.g., TV) using an HDMI cable. Power on the DVR/NVR.
- 6. App Installation:** Download and install the Lorex mobile application on your smartphone or tablet. This app allows for remote viewing and control of your camera system.
- 7. System Configuration:** Follow the on-screen prompts on your DVR/NVR and within the Lorex app to

complete the initial system configuration, including setting up network access and user accounts.



Figure 6: The Lorex DVR/NVR hub, illustrating its connections to the camera and display via HDMI and power.

### 3. OPERATING THE CAMERA SYSTEM

---

Your Lorex security camera system offers various ways to monitor and manage your surveillance footage.

#### 3.1. Live View and Playback

- **On-Screen Display:** View live feeds from all connected cameras directly on your connected TV or monitor. Use the provided mouse to navigate the main menu, switch between individual camera views, and access playback options.
- **Mobile App:** Access live views of individual cameras from anywhere using the Lorex mobile app. The app allows you to select specific cameras to view, providing real-time monitoring.

#### 3.2. Two-Way Talk

Some Lorex camera models support two-way audio communication. If your camera has this feature, you can speak through the camera and hear audio from the camera's location directly through the mobile app. This is

useful for communicating with visitors or deterring unwanted individuals.

### 3.3. Motion Detection and Alerts

The system is equipped with advanced motion detection capabilities. You can configure detection zones and sensitivity settings to receive alerts when motion, people, or vehicles are detected. These alerts can be sent directly to your mobile device, allowing for immediate awareness of events.

### 3.4. Recording and Storage

The DVR/NVR includes a 1 terabyte hard drive for extensive video storage. The system is designed to continuously loop record, automatically overwriting the oldest footage once the storage is full. You can also search for specific events or playback recorded footage through the DVR/NVR interface or the mobile app.

## 4. MAINTENANCE

---

Regular maintenance ensures optimal performance and longevity of your Lorex security camera system.

- **Cleaning the Camera Lens:** Periodically clean the camera lens with a soft, lint-free cloth to remove dust, dirt, or smudges that may affect image clarity. Avoid abrasive cleaners.
- **Checking Connections:** Ensure all cables (power, video, network) are securely connected to prevent signal loss or power interruptions.
- **Firmware Updates:** Check the Lorex website or your mobile app for available firmware updates for your DVR/NVR and cameras. Keeping firmware updated can improve performance and add new features.
- **Environmental Considerations:** While the camera is weatherproof (IP65), ensure its mounting location minimizes direct exposure to extreme weather conditions where possible, such as prolonged standing water or direct impact from debris.
- **Hard Drive Health:** Monitor the health of your DVR/NVR's hard drive through the system settings to ensure continuous recording.

## 5. TROUBLESHOOTING

---

If you encounter issues with your Lorex security camera system, refer to the following common troubleshooting steps:

### 5.1. No Image/Signal on Display

- **Check Power:** Ensure the camera and DVR/NVR are properly powered on and connected to a working power outlet.
- **Verify Connections:** Confirm that all video cables (BNC/HDMI) are securely connected between the camera, DVR/NVR, and display.
- **Input Selection:** Ensure your TV/monitor is set to the correct input source (e.g., HDMI 1, HDMI 2).
- **Test Camera:** If possible, test the camera with a different video input or a known working channel on your DVR/NVR.

### 5.2. Recording Issues

- **Hard Drive Status:** Check the DVR/NVR settings to ensure the hard drive is detected and functioning correctly. Reformat the hard drive if necessary (this will erase all existing recordings).

- **Recording Schedule:** Verify that the recording schedule is properly configured for continuous or motion-activated recording.
- **Motion Detection Settings:** If using motion-activated recording, ensure motion detection is enabled and sensitivity levels are appropriate for the environment.

### 5.3. Remote Viewing Issues (Mobile App)

- **Network Connection:** Ensure your DVR/NVR is connected to the internet via an Ethernet cable and has a stable network connection.
- **App Login:** Confirm you are logged into the Lorex app with the correct credentials.
- **Router Settings:** Check your router's firewall settings to ensure they are not blocking the Lorex system's access to the internet. Port forwarding may be required in some cases.
- **App Updates:** Ensure your Lorex mobile app is updated to the latest version.

## 6. SPECIFICATIONS

Feature	Specification
Model Number	C882DA
Video Capture Resolution	4K (8 MP Effective Still Resolution)
Connectivity Technology	Wired
Power Source	Corded Electric (8 watts)
Mounting Type	Ceiling/Wall Mount
Indoor/Outdoor Usage	Indoor/Outdoor
International Protection Rating	IP65 (Weatherproof)
Night Vision Range	150 Feet
Low Light Technology	Color Night Vision
Alert Type	Motion Only
Material	Polycarbonate (PC)
Item Dimensions (L x W x H)	5.9 x 2.8 x 3.2 inches
Item Weight	2.31 pounds
Included Components	Camera, mounting kit, power adapter, extension cable, quick start guide
Compatible DVR/NVR Series	D841 / D841B / D861 / LHV5100 / LHV5100W

## 7. WARRANTY & SUPPORT

Lorex products typically come with a limited warranty. For specific warranty details, duration, and terms, please refer to the warranty card included with your product or visit the official Lorex website. Keep your proof of purchase for warranty claims.


For technical support, product registration, or to access additional resources such as FAQs and software



downloads, please visit the Lorex support page on their official website. You may also find contact information for customer service there.

**Important:** Always ensure you are using official Lorex support channels for assistance.

© 2024 Lorex Technology Inc. All rights reserved.

## Related Documents - C882DA

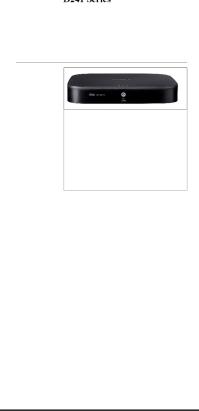	<p><a href="#"><u>Lorex 4K Ultra HD Security Systems: DVRs and Active Deterrence Cameras</u></a></p> <p>Explore Lorex 4K Ultra HD Digital Video Recorders (DVRs) and Active Deterrence Cameras. Features include advanced motion detection, smart home compatibility, local storage, and superior resolution for comprehensive security.</p>
	<p><a href="#"><u>Lorex D241 Series User Manual: Comprehensive Guide to Setup, Features, and Operation</u></a></p> <p>Explore the Lorex D241 Series 1080p HD Security DVR with this detailed user manual. Learn about installation, recording, playback, motion detection, remote access, and troubleshooting for your security system.</p>
	<p><a href="#"><u>Lorex E893AB 4K Smart Deterrence IP Camera with Smart Motion Detection Plus</u></a></p> <p>Discover the Lorex E893AB 4K Ultra HD IP camera, featuring Smart Deterrence, Smart Motion Detection Plus, Color Night Vision, and two-way talk for advanced home security. Includes detailed specifications and features.</p>
	<p><a href="#"><u>Lorex 4K Security Camera &amp; DVR System: Setup and User Guide</u></a></p> <p>Get started with your Lorex 4K Ultra HD Active Deterrence Security Camera and D871 Series DVR system. This guide provides comprehensive setup instructions, user manual details, and troubleshooting tips for your Lorex surveillance system.</p>

	<p><b>Lorex N842 Series 4K NVR Quick Setup Guide</b></p> <p>A comprehensive guide to setting up your Lorex N842 Series 4K Ultra HD NVR, covering physical connections, initial configuration via the setup wizard, and essential operational features like mouse usage, playback, backup, and motion detection settings.</p>
	<p><b>Lorex N843 Series Quick Setup Guide: Installation and Configuration</b></p> <p>Comprehensive quick setup guide for the Lorex N843 Series NVR. Learn how to physically install your system, connect cameras, configure network settings, use the setup wizard, and manage recordings. Includes detailed instructions on mouse usage, playback, backup, and advanced features like smart motion detection and active deterrence.</p>

## Documents - Lorex – C882DA



### [\[pdf\] Quick Start Guide Documentation Guide Warranty](#)

C882DA Series Quick Start Guide Cloudfront net3 giorni fa — Use your Lorex app to manually activate the camera's white light and siren features when connected to a compatible recorder PREREQUISITE Connect to C882DA QSG EN R2 webd2zri47w41ywm3 cloudfront net security cameras web webC882DA webcdn lorex |||

Package Contents 4K Ultra HD Active Deterrence Security Camera Mounting Kit\* BNC / Power ... cations and prices, without notice and without incurring any obligation. E OE. All rights reserved. **C882DA\_QSG\_EN\_R2 C882DA SERIES** www.lorex.com Installing the Camera ATTENTION: Test your camera p... lang:en **score:46** filesize: 1 M page\_count: 2 document date: 2019-04-17



### [\[pdf\] User Manual Quick Start Guide Installation Guide Instructions Documentation Guide Warranty](#)

C882DA Series Quick Start Guide 4K Active Deterrence Security Camera Lorex Use your app to manually activate the camera's white light and siren features when connected to a compatible recorder PREREQUISITE Connect QSG EN R2 web lorextechnology security cameras Package Contents Resources instructions refer manual on product page at lorex A B Cloud Home To install 1 Set in desired mounting position mark holes for screws through base 2 Drill then feed cable DVR documentation full Ensure active areas schedule deterrence are set properly The default warning is night times between 5PM 7AM not switching automatically cannot switch Copyright 2019 Corporation As our products subject 868B0A10 9341 4A09 AAAB 0F642EFACDD5 files bbystatic db42CZnPwmZFPy7zNFKNbQ


Package Contents 4K Ultra HD Active Deterrence Security Camera Mounting Kit\* BNC / Power Extensio ... cations and prices, without notice and without incurring any obligation. E OE. All rights reserved. **C882DA\_QSG\_EN\_R2 C882DA SERIES** www.lorex.com Installing the Camera ATTENTION: Test your camera p... lang:en **score:43** filesize: 1 M page\_count: 2 document date: 2019-04-17



### [\[pdf\] Quick Start Guide Documentation Guide](#)

SÉRIES C882DA Guide de démarrage rapide QSG FR R2 web lorextechnology security cameras

Contenu de l'emballage Camra de securit 4K Ultra Active dissuasion Trousse d assemblage\* BNC/cble ... uit, les spcifications et les prix sans pravis et sans aucune obligation. E OE. Tous droits rservs. **C882DA\_QSG\_FR\_R2 SRIES C882DA** www.lorex.com Installation de la camra ATTENTION: Tester la camra a... lang:fr score:41 filesize: 1 M page\_count: 2 document date: 2019-04-17

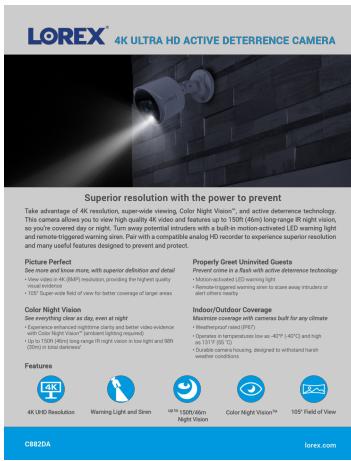

### [\[pdf\] Quick Start Guide Specifications Guide](#)

C882DA designed by Uma Radhakrishnan 4K ULTRA HD ACTIVE DETERRENCE CAMERA Lorex 5

This camera should only be used with the supplied cable and power adapter or an extension meeting specifications listed in Quick Start Guide Installation The use of any other cabling will adversely affect performance Series Specs R4 lorextechnology security cameras

4K ULTRA HD ACTIVE DETERRENCE CAMERA Superior resolution with the power to prevent Take advantage o ... ion Warning Light and Siren up to 150ft/46m Night Vision Color Night VisionTM 105 Field of View **C882DA** lorex.com 4K ULTRA HD ACTIVE DETERRENCE CAMERA Product Specifications General Video Tran... lang:en score:41 filesize: 343.49 K page\_count: 2 document date: 2020-04-16



### [\[pdf\] Quick Start Guide Documentation Guide](#)

SÉRIES C882DA Guide de démarrage rapide 29 ott 2025 — Pour consulter la liste complète des enregistreurs compatibles visitez le site lorex compatibility vous assurer que visionnez vidéo deC882DA QSG FR R2 webcdn security cameras web |||

Contenu de l'emballage Cam ra de s curit 4K Ultra Active dissuasion Trousse d ass ... sp cifications et les prix sans pr avis et sans aucune obligation. E OE. Tous droits r serv s. **C882DA\_QSG\_FR\_R2 SRIES C882DA** www.lorex.com Installation de la camra ATTENTION: Tester la cam...

lang:fr score:38 filesize: 1 M page\_count: 2 document date: 2019-04-17



### [\[pdf\] Quick Start Guide Documentation Guide](#)

SÉRIES C882DA Guide de démarrage rapide C883DA QSG FR R1 web lorextechnology security cameras

Contenu de l'emballage Camra de securit 4K Ultra Active dissuasion Trousse d assemblage\* BNC/cble de rallonge\* Bloc d alimentation\*\* \* Par camra dans les emballages multi-camras. \*\* Un bloc d alimentation qui alimente plusieurs camras ou des blocs d alimentation individuels peuvent aussi tre fou...

lang:fr score:32 filesize: 1.34 M page\_count: 2 document date: 2020-04-15



## [pdf] Quick Start Guide Documentation Guide Warranty


C882DA Series Quick Start Guide C883DA QSG EN R1 webd2zri47w41ywm3 cloudfont net security cameras web |||

Package Contents 4K Ultra HD Active Deterrence Security Camera Mounting Kit\*

BNC / Power Extension Cable\* Power Adapter\*\* \* Per camera in multi-camera packs.

\*\* A multi-camera power adapter that provides power to multiple cameras or individual power adapters may be provided depending on product ...

lang:en score:32 filesize: 1.33 M page\_count: 2 document date: 2020-04-15

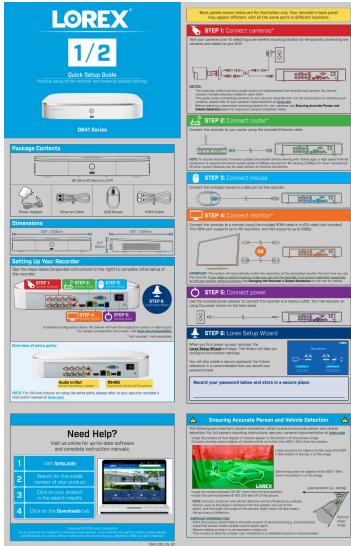

## [pdf] Quick Start Guide Instructions Documentation Guide

Icecream Split Merge Lorex 4K Security Camera System Ultra HD Indoor Outdoor Bullet Cameras with Motion Detection Color Night Vision Smart Home Compatibility 2TB 8 Channel Wired DVR Bundle D841A82 8DA8 E User Guide LOREX B0BQ8CP5Y8 B09W9XP8F8 B0868W356Z B1GEx2Z KS m media amazon images | |||

1 / 2 Quick Setup Guide Physical setup of the recorder and essential system settings

Package Content ... cations and prices, without notice and without incurring any obligation. E OE. All rights reserved. **C882DA\_QSG\_EN\_R2 C882DA SERIES**

www.lorex.com Installing the Camera ATTENTION: Test your camera p...

lang:en score:31 filesize: 3.21 M page\_count: 4 document date: 2021-04-30



## [pdf] Quick Start Guide

Serie C882DA Guía de inicio rápido Lorex CorporationMueva la cámara hacia una ubicación diferente La luz advertencia no se enciende automáticamente Asegúrese haber activado y C882DA QSG SP R2 weblorextechnology security cameras web |||

Contenidos del paquete C mara de seguridad 4 K con sistema de disuasi n activo Kit de mont ... y sin incurrir en ninguna obligaci n. Excepto errores y omisiones. Todos los derechos reservados. **C882DA\_QSG\_SP\_R2 SERIE C882DA** www.lorex.com Instalaci n de la c mara ATENCI N: Pruebe la c m...

lang:es score:30 filesize: 1 M page\_count: 2 document date: 2019-04-17



## [pdf] Specifications

C882DA designed by Uma Radhakrishnan 4K ULTRA HD ACTIVE DETERRENCE CAMERA Lorex Take advantage of resolution super wide viewing Color Night Vision™ and active deterrence technology This camera allows you to view the highest quality video up to 150ft/46m long range IR night vision, no you're covered day or night. Turn potential intruders with a built-in motion-activated LED warning light and remote-triggered warning siren. Pair with a compatible HD recorder to experience superior resolution and active deterrence features designed to prevent and protect.

### Picture Perfect

Take advantage of 4K resolution, super-wide viewing, Color Night Vision™, and active deterrence technology.

This camera allows you to view the highest quality video up to 150ft/46m long range IR night vision, no you're covered day or night.

Turn potential intruders with a built-in motion-activated LED warning light and remote-triggered warning siren.

Pair with a compatible HD recorder to experience superior resolution and active deterrence features designed to prevent and protect.

### Picture Perfect

See more and know more, with superior definition and detail.

• View video in 4K (8MP) resolution, providing the highest quality resolution and detail.

• 111° Super-wide field of view to better coverage of larger areas.

Color Night Vision

See everything day or night, even in the dark.

• Color Night Vision™ provides clear and better video evidence with Color Night Vision™ (ambient lighting required).

• 150ft/46m long range IR night vision in low light and 98ft/30m in total darkness.

### Features

• 4K UHD Resolution

• Warning Light and Siren

• 150ft/46m Night Vision

• Color Night Vision™

• 111° Field of View

Property Green Unleashed Guests

• Prevent crime in a flash with active deterrence technology

• Motion-activated LED warning light

• Remote-triggered warning siren to scare away intruders or alert owners nearby

### Indoor/Outdoor Coverage

• Maximize coverage with cameras built for any climate

• Operates in temperatures low as -40°F (-40°C) and high as 122°F (50°C)

• Durable camera housing designed to withstand harsh weather conditions

4K ULTRA HD ACTIVE DETERRENCE CAMERA Superior resolution with the power to prevent

Take advantage of 4K resolution, super-wide viewing Color Night Vision™ and active deterrence technology This

camera allows you to view high quality video features up to 150ft/46m long range IR night vision Series

Specs R2 lorextechnology security cameras


4K ULTRA HD ACTIVE DETERRENCE CAMERA Superior resolution with the power to prevent

Take advantage of 4K resolution, super-wide viewing Color Night Vision™ and active deterrence technology This

camera allows you to view high quality video features up to 150ft/46m long range IR night vision Series

Specs R2 lorextechnology security cameras

lang:en score:30 filesize: 173.65 K page\_count: 2 document date: 2019-05-14

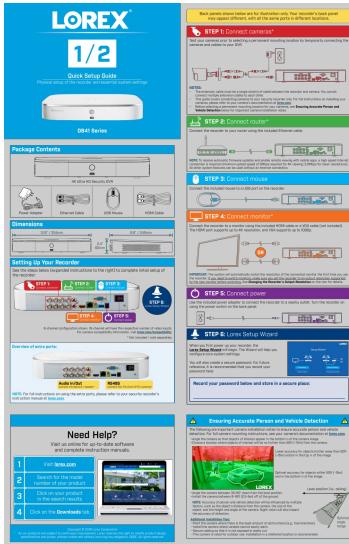

### [\[pdf\] Quick Start Guide Instructions Documentation Guide](#)

Icecream Split Merge Lorex 4K Security Camera System Ultra HD 16 Channel Wired w 10 8MP Active Deterrence Smart Home Compatibility Advanced Motion Detection Cameras 2 TB D841A62 8DAA E R User Guide B1VZLR6b0SS m media amazon images | |||


1 / 2 Quick Setup Guide Physical setup of the recorder and essential system settings Package Content ... cations and prices, without notice and without incurring any obligation. E OE. All rights reserved. **C882DA\_QSG\_EN\_R2 C882DA SERIES** www.lorex.com Installing the Camera ATTENTION: Test your camera p... lang:en **score:30** filesize: 3.21 M page\_count: 4 document date: 2021-04-30



### [Lorex C883DA Series 4K Ultra HD Active Deterrence Security Camera Quick Start Guide](#)

Quick start guide for the Lorex C883DA Series 4K Ultra HD Active Deterrence Security Camera, covering package contents, installation, connection, and troubleshooting.

lang:en **score:29** filesize: 1.33 M page\_count: 2 document date: 2020-04-15




### [\[pdf\] Quick Start Guide Instructions Documentation Guide Warranty](#)

C882DA Series Quick Start Guide Package Contents Resources DVR s documentation for full instructions Ensure the active areas and schedule white light deterrence are set properly The default warning is night times between 5PM 7AM camera siren not switching on automatically 12V DC Power cannot switch original content syndigo asset 5a036b07-f95f-43bd-a5ac-fe17d912fe86 Webcollage net For a list of compatible recorders visit lorex compatibility To ensure that you viewing video in 4K resolution e4407be437e146919658881a3f95773b smedia webcollage rwvfp wc cp 1596114493400 61238824-6a7e-4a8e-88ce-c6a1d314b57d module fctzfewrrhsbhfpkumhdzjnau products 1592583790587 tab-f3963c73-5ab7-21e2-3313-456ec591aeff

Package Contents 4K Ultra HD Active Deterrence Security Camera Mounting Kit\* BNC / Power Extension Cable\* Power Adapter\*\* \* Per camera in multi-camera packs. \*\* A multi-camera power adapter that provides power to multiple cameras or individual power adapters may be provided depending on product ...

lang:en **score:28** filesize: 1.42 M page\_count: 2 document date: 2020-04-15

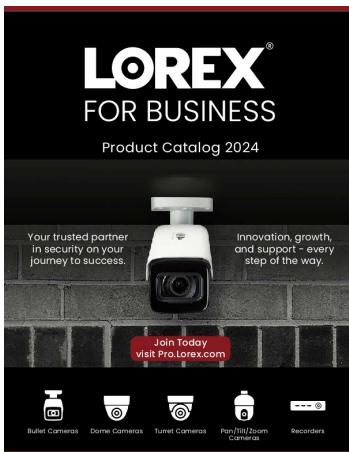


### [\[pdf\] Accessories Catalog](#)

Lorex For Business Product Catalog 2024 Technology for R9 cdn lorex business catalog | |||

Lorex for Business Product Catalog 2024 Your trusted partner in security on your journey to success ... Fixed White No IP67 131F / 55C -40F / -40C 430mA / 5.2W CNV, IR 135ft 41m 90ft 28m Yes Yes 98 **C882DA** Analog Bullet 4K 8MP Bullet 4K - 15fps Fixed White No IP67 131F / 55C -40F / -40C 430mA / 5.2...

lang:en **score:25** filesize: 18.83 M page\_count: 36 document date: 2024-05-23

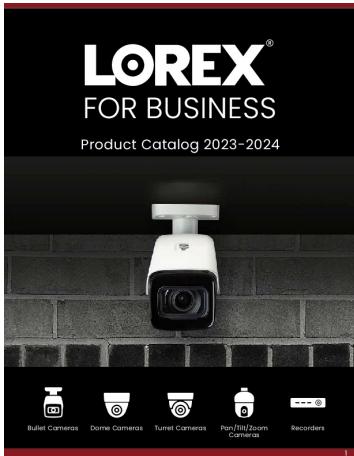

### [\[pdf\] Accessories Catalog](#)

Lorex For Business Product Catalog 2023 Vincent Spensieri for R5 d2zri47w41ywm3 cloudfont net business catalog |||

Lorex for Business Product Catalog 2023-2024 Bullet Cameras Dome Cameras Turret Cameras Pan/Tilt/ ... Fixed White No IP67 131F / 55C -40F / -40C 430mA / 5.2W CNV, IR 135ft 41m 90ft 28m Yes Yes 98 **C882DA** Analog Bullet 4K 8MP Bullet 4K - 15fps Fixed White No IP67 131F / 55C -40F / -40C 430mA / 5.2...

lang:en score:24 filesize: 17.69 M page\_count: 30 document date: 2023-11-16




### [\[pdf\] Troubleshooting Guide Specifications Warranty Accessories Catalog](#)

Lorex For Business Product Catalog 2024 Technology Cloudfont net Get help setting up configuring or troubleshooting your product as well any warranty related inquiries Option 1 English 2 Spanish 3 French Accessories d2zri47w41ywm3 cloudfont business catalog series 20240523 |||

Accessories Accessories Ethernet Cables SKU Length ft Technology UL Certified CMR Riser Rated Ou ... 861CH ACCJ7R3W/ ACJNCD3B White Junction Box with 3 Screw Base E894AB E896AB E896DD E892DD C881DA **C882DA** C883DA C884DA E893DD E896DD E8910DD E841CD LNB9292B LNE9252B LNE9292B E841CD ACJNCD4...

lang:en score:24 filesize: 628.21 K page\_count: 9 document date: 2024-05-23

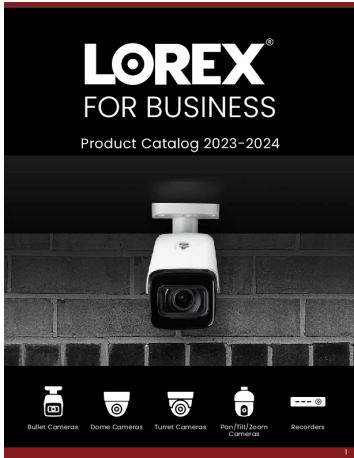


### [\[pdf\] Accessories Catalog](#)

Lorex For Business Product Catalog 2023 Vincent Spensieri Cloudfont net Nov 7 · Plug and play security to monitor your outdoors These cameras connect a wireless network in minutes record an on board microSD card for R4 d2zri47w41ywm3 cloudfont business catalog |||

Lorex for Business Product Catalog 2023-2024 Bullet Cameras Dome Cameras Turret Cameras Pan/Tilt/ ... Fixed White No IP67 131F / 55C -40F / -40C 430mA / 5.2W CNV, IR 135ft 41m 90ft 28m Yes Yes 98 **C882DA** Analog Bullet 4K 8MP Bullet 4K - 15fps Fixed White No IP67 131F / 55C -40F / -40C 430mA / 5.2...

lang:en score:23 filesize: 17.41 M page\_count: 30 document date: 2023-11-06

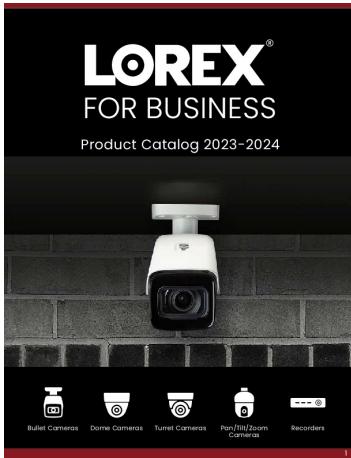


### [\[pdf\] Accessories Catalog](#)

Lorex For Business Product Catalog 2023 Vincent Spensieri Cloudfront netN882 N883 N884 Name Elite Series Color Black Smart Motion Detection Person Yes YesLorex for R3d2zri47w41ywm3 cloudfront net business catalog R3 |||

Lorex for Business Product Catalog 2023-2024 Bullet Cameras Dome Cameras Turret Cameras Pan/Tilt/... xed White No IP67 131F / 55C -40F / -40C 430mA / 5.2W CNV, IR 135ft 41m 90ft 28m Yes Yes No 98 **C882DA** Analog Bullet 4K 8MP Bullet 4K - 15fps Fixed White No IP67 131F / 55C -40F / -40C 430mA / 5.2...

lang:en score:23 filesize: 17.55 M page\_count: 30 document date: 2023-10-30

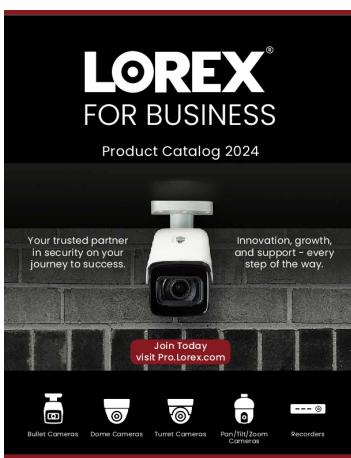

### [\[pdf\] Accessories Catalog](#)

Lorex For Business Product Catalog 2023 Vincent Spensieri Cloudfront net Apr 10 2024 · the life cycle of your camera so you can count on years With Smart Security Lighting customize s LED band for R7 d2zri47w41ywm3 cloudfront business catalog |||

Lorex for Business Product Catalog 2024 Your trusted partner in security on your journey to succes ... Fixed White No IP67 131F / 55C -40F / -40C 430mA / 5.2W CNV, IR 135ft 41m 90ft 28m Yes Yes 98 **C882DA** Analog Bullet 4K 8MP Bullet 4K - 15fps Fixed White No IP67 131F / 55C -40F / -40C 430mA / 5.2...

lang:en score:22 filesize: 18.69 M page\_count: 35 document date: 2024-04-08



### [\[pdf\] Specifications](#)

Icecream PDF Split&Merge 4K ULTRA HD DIGITAL VIDEO RECORDER Power Adapter Mounting Kit Quick< b> Start< Guides or an extension cable meeting the specifications listed in Guide< Installation The use of any other power adapter cabling will adversely affect performance Author: 4 30 2021< 1:14:19 PM A1zjaNu8srL m media-amazon images |

4K ULTRA HD DIGITAL VIDEO RECORDER 4K recording with advanced motion detection technology Record an ... ion Warning Light and Siren up to 150ft/46m Night Vision Color Night VisionTM 105 Field of View **C882DA** lorex.com 4K ULTRA HD ACTIVE DETERRENCE CAMERA Product Specifications General Video Tran...

lang:en score:21 filesize: 1.14 M page\_count: 5 document date: 2021-04-30



## [Lorex 4K Ultra HD Security Systems: DVRs and Active Deterrence Cameras](#)

Explore Lorex 4K Ultra HD Digital Video Recorders (DVRs) and Active Deterrence Cameras. Features include advanced motion detection, smart home compatibility, local storage, and superior resolution for comprehensive security.

lang:en score:21 filesize: 1.14 M page\_count: 5 document date: 2021-04-30



## [\[pdf\] Quick Start Guide](#)

Serie C882DA Guía de inicio rápido C883DA QSG SP R1 web lorextechnology security cameras

Contenidos del paquete Cmara de seguridad 4 K con sistema de disuasin activo Kit de montaje\* Cable extensin de corriente elctrica/BNC\* Adaptador de corriente\*\* \* Por cmara en los paquetes con varias cmaras. \*\* Se puede proporcionar un adaptador de corriente que alimenta varias cmaras o adaptador...

lang:es score:17 filesize: 1.34 M page\_count: 2 document date: 2020-04-15