

[Manuals.plus](#) /

› [WOODBIDGE](#) /

› WOODBRIDGE GT090 Smart Bidet Toilet User Manual

WOODBIDGE GT090

WOODBIDGE GT090 Smart Bidet Toilet User Manual

Model: GT090

[Introduction](#) [Features](#) [Installation](#) [Operation](#) [Maintenance](#) [Troubleshooting](#) [Specifications](#) [Support](#)

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your WOODBRIDGE GT090 Smart Bidet Toilet. Please read this manual thoroughly before installation and use to ensure proper function and safety. Retain this manual for future reference.



Figure 1: WOODBRIDGE GT090 Smart Bidet Toilet.

2. PRODUCT FEATURES

The WOODBRIDGE GT090 Smart Bidet Toilet is equipped with advanced features designed for enhanced hygiene and comfort:

- **Auto Open & Close:** The lid automatically opens upon approach and closes after use. It also flushes automatically. A foot sensor provides touch-free lid operation and flushing.
- **Adjustable Sensor Distance:** Customize the lid's sensor range to 20, 40, 60, 80, or 100 cm. This function can also be deactivated.
- **Built-in Fragrance System:** An integrated tablet releases a continuous scent for a fresh bathroom environment.
- **Pulse Wash:** Rhythmic, alternating water pressure provides a massage effect for thorough cleaning.
- **Foam Shield System:** Creates a foam layer to minimize splashing, stains, and odors, and reduce flushing noise. One bottle of foam solution is included.
- **Self-Cleaning Curved Stainless Steel Nozzle:** The spray wand self-cleans before and after each use. Its rust-resistant, arc design ensures hygienic and precise cleaning.

- **Emergency Power-Off Flush:** A backup battery box (10 AA batteries not included) allows flushing during power outages.
- **Smart Bidet System:** Includes rear and front moving wash, bowl pre-moistening, adjustable water temperature and pressure, a heated seat, and a digital display for water temperature.
- **ADA Comfort Height:** The toilet features an ADA compliant chair height of 17.4 inches for easier sitting and standing.

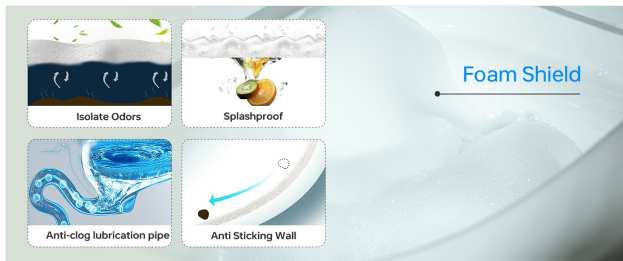


Figure 2: Foam Shield System benefits.



Figure 3: Adjustable Sensing Distance for Auto Open.



Figure 4: Fragrance Insert mechanism.



Figure 5: ADA Comfort Height.

3. INSTALLATION

Professional installation is recommended for this product. Ensure all local plumbing and electrical codes are followed. The unit is heavy and may require assistance for positioning.

3.1 Pre-Installation Checklist

- Verify all components are present and undamaged.
- Ensure water supply and electrical outlet are within reach of the installation area.
- Confirm floor mounting surface is level and stable.
- Review the dimensions diagram to ensure proper fit and rough-in measurements.

3.2 Dimensions and Technical Data

Refer to the diagram below for critical dimensions and technical specifications necessary for installation planning. Dimensions may

vary slightly; it is recommended to measure the actual unit for precise installation.



Figure 6: Product Dimensions and Technical Data.

3.3 Power Outage Flush

In case of a power outage, the toilet can still be flushed using the backup battery box. This requires 10 AA batteries (not included). Short press the side button or use the foot kick button to activate the flush.



Figure 7: Emergency Power-Off Flush.

4. OPERATING INSTRUCTIONS

4.1 Auto Open/Close and Flushing

- **Automatic Lid:** The lid will automatically open when a user approaches the toilet within the set sensor range. It will close and flush automatically after use.
- **Foot Sensor:** A foot sensor allows for touch-free lid opening and flushing.
- **Adjusting Sensor Distance:** The sensor range can be adjusted to 20, 40, 60, 80, or 100 cm. Refer to the product's control panel or remote for specific adjustment steps. This feature can also be turned off.




Figure 8: Auto Open/Close and Flushing for Sitting and Standing Use.

4.2 Bidet Functions

- **Rear and Front Wash:** Select the desired wash function for posterior or feminine cleansing.
- **Movement Wash:** Activates oscillating nozzle movement for a wider cleaning area.
- **Pulse Wash:** Provides a rhythmic, alternating water pressure for a massaging effect.
- **Water Temperature Adjustment:** Adjust water temperature to your preference (e.g., Room Temp, 93°F, 98°F, 104°F). The current temperature is displayed digitally.
- **Water Pressure Adjustment:** Adjust the water pressure to one of four levels.
- **Nozzle Position Adjustment:** Adjust the nozzle's position for optimal cleaning.

SPA-STYLE BIDET CLEANING

- 1: 4 Adjustable Water Pressure Levels
- 2: Alternating Warm & Cool Water Massage

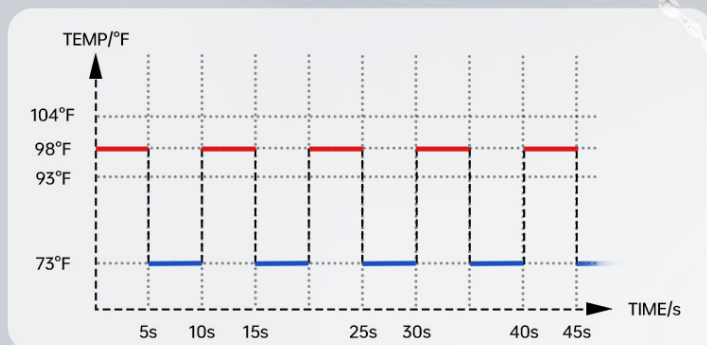

5s of hot water

+

5s of cold water

Figure 9: Spa-Style Bidet Cleaning.

VERSITILE NOZZLE WASHING

Movement Wash

4 - Levels Water TEMP Adjustment

OFF

93°F

98°F

104°F

4 - Levels Water Pressure Adjustment

4 - Levels Nozzle Positioncan Adjustment

Figure 10: Versatile Nozzle Washing Controls.

4.3 Heated Seat and Hot Air Drying

- **Heated Seat:** The seat temperature can be adjusted to four levels (e.g., Room Temp, 91.4°F, 99.6°F, 105.8°F) for comfort.
- **Hot Air Drying:** After washing, use the hot air dryer with four adjustable wind temperatures (e.g., Room Temp, 122°F, 131°F, 140°F) for fast drying.

HEATED SEAT

4-Level Adjustable Temperature

Customize your comfort with 4 temperature settings for the perfect seat warmth, all year round.



4-LEVEL ADJUSTABLE TEMPERATURE

room temperature 91.4°F 99.6°F 105.8°F



Overheat Protection
Ensures safe and reliable use.

Figure 11: Heated Seat and Hot Air Drying.

4.4 Motion-Activated Night Light

The toilet features a motion-activated night light for visibility in low light conditions. The light automatically turns off when the lid is closed to conserve energy.



Figure 12: Motion-Activated Night Light.

4.5 Smart Control Knob and Display Screen

The toilet features a smart control knob for easy access to main functions and an acrylic panel display screen. The display shows water temperature, seat temperature, and ambient temperature for precise control.

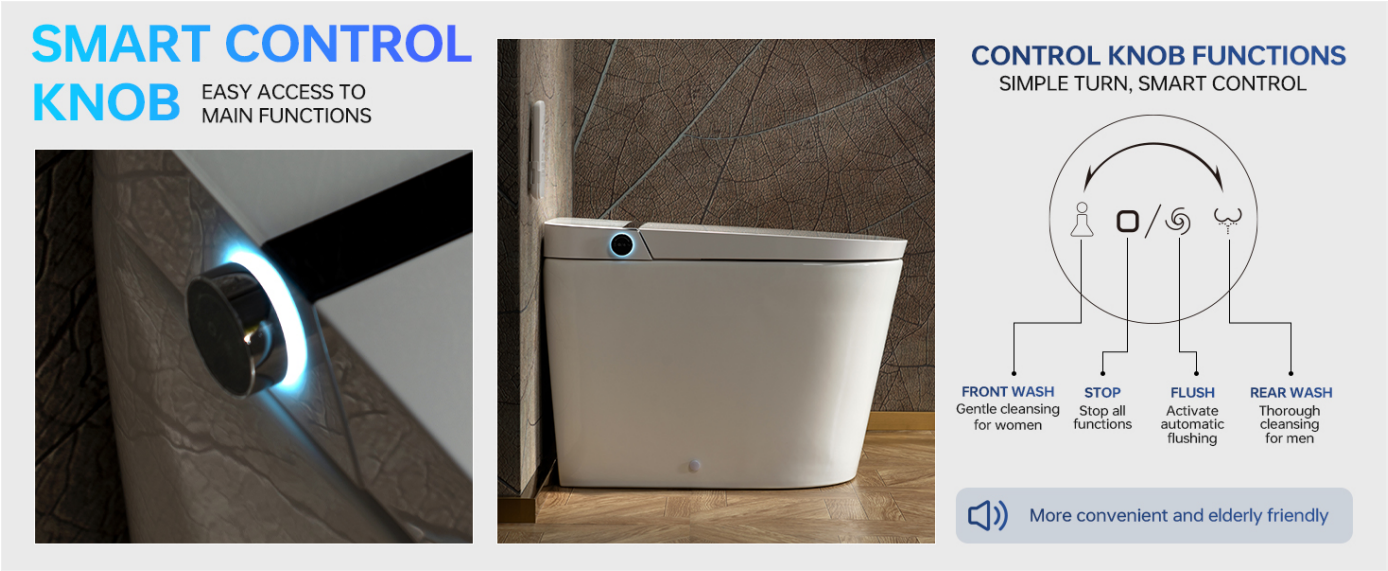


Figure 13: Smart Control Knob Functions.

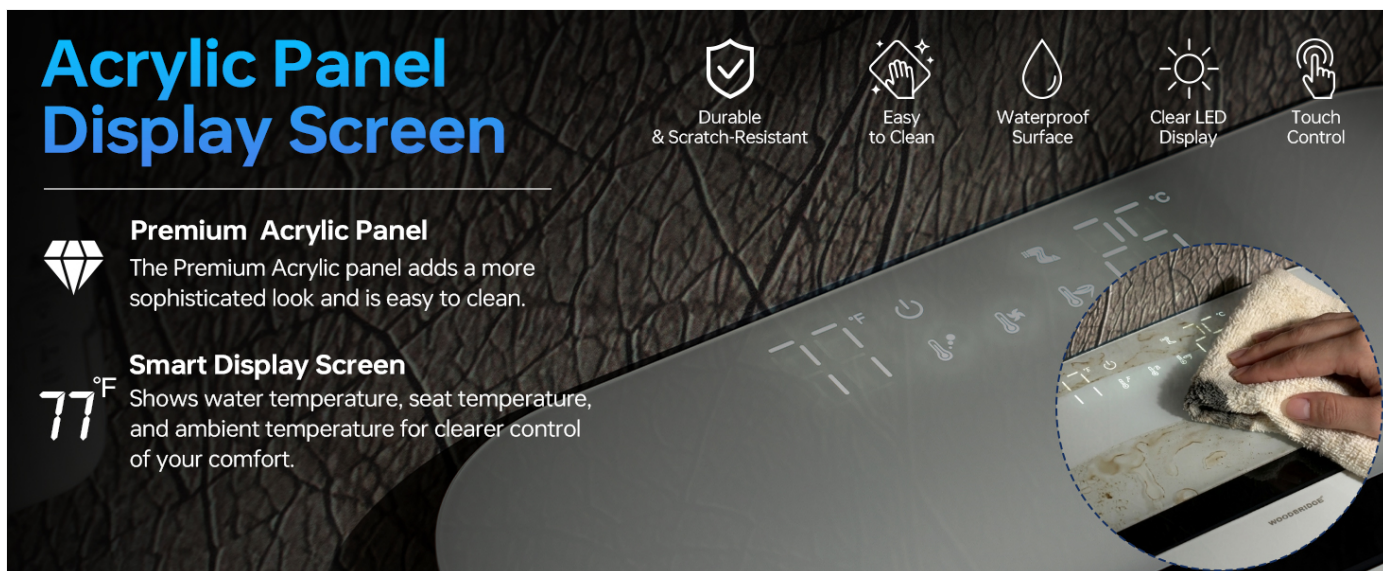


Figure 14: Acrylic Panel Display Screen.

5. MAINTENANCE

5.1 Nozzle Cleaning

The curved stainless steel nozzle features an automatic self-cleaning function before and after each use. For additional cleaning, consult the remote control or side panel for manual nozzle cleaning options.



Figure 15: Self-Cleaning Nozzle.

5.2 Foam Shield Solution

The Foam Shield System requires a foam solution. Replace the foam solution bottle as needed to maintain optimal performance. One bottle is included with the product.

5.3 General Cleaning

Clean the exterior surfaces of the toilet with a soft, damp cloth and mild, non-abrasive cleaner. Avoid harsh chemicals that may damage the finish or electronic components. The acrylic panel display screen is designed to be easy to clean.

6. TROUBLESHOOTING

This section addresses common issues you might encounter. For problems not listed here, please contact customer support.

Problem	Possible Cause	Solution
Lid does not open automatically.	Sensor distance set too short or sensor function is off. Obstruction in sensor path.	Adjust sensor distance settings. Ensure no objects are blocking the sensor. Verify sensor function is enabled.
No water from bidet nozzle.	Water supply valve closed. Water pressure too low. Nozzle clogged.	Ensure water supply valve is fully open. Check household water pressure. Perform manual nozzle cleaning cycle.
Heated seat not warming.	Heated seat function is off or temperature set too low.	Activate heated seat function and adjust temperature settings via remote or control panel.
Toilet does not flush during power outage.	Backup batteries are dead or not installed.	Install 10 new AA batteries in the backup battery box.

7. SPECIFICATIONS

Feature	Detail
Model Number	GT090
Color	White
Product Dimensions (D x W x H)	27"D x 15.4"W x 19.1"H
Material	Ceramic (Toilet), Porcelain (Seat)
Item Weight	77 pounds
Installation Method	Floor Mounted
Shape	Oval
ADA Compliant Height	17.4 inches
Included Components	Toilet, 1 bottle of foam solution
Backup Power	Requires 10 AA batteries (not included) for emergency flush

8. WARRANTY AND SUPPORT

8.1 Customer Support

For product advice, installation assistance, after-sales service, or free warranty replacement parts, please contact our U.S.-based support team.

Email: help@woodbridgebath.com

Phone: (Refer to product packaging or official website for phone number)

With East and West Coast warehouses, our team aims to provide fast and reliable assistance.

8.2 Warranty Information

It is recommended to register your product to upgrade to a 2-year warranty. Please refer to the product registration card or the official WOODBRIDGE website for detailed warranty terms and conditions.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question