

Airfrex SEHD

Airfrex SEHD Bluetooth Receiver User Manual

For Sennheiser HD598 / HD598Cs / HD598SE / HD595 / HD599 / HD559 / HD569 / HD579 / HD518 / HD558
Headphones

1. INTRODUCTION

The Airfrex SEHD is a compact Bluetooth receiver designed to transform your compatible Sennheiser HD series wired headphones into wireless headphones. This adapter provides a stable Bluetooth connection with a range of over 10 meters, ensuring clear audio transmission without electrical or static noise. Its metal aluminum casing makes it durable and portable, an ideal accessory for enhancing your listening experience.

This manual provides detailed instructions on how to set up, operate, and maintain your Airfrex SEHD Bluetooth Receiver.

Turn Your Wired Headphones into Wireless

Meanwhile No Sound Quality Compromise

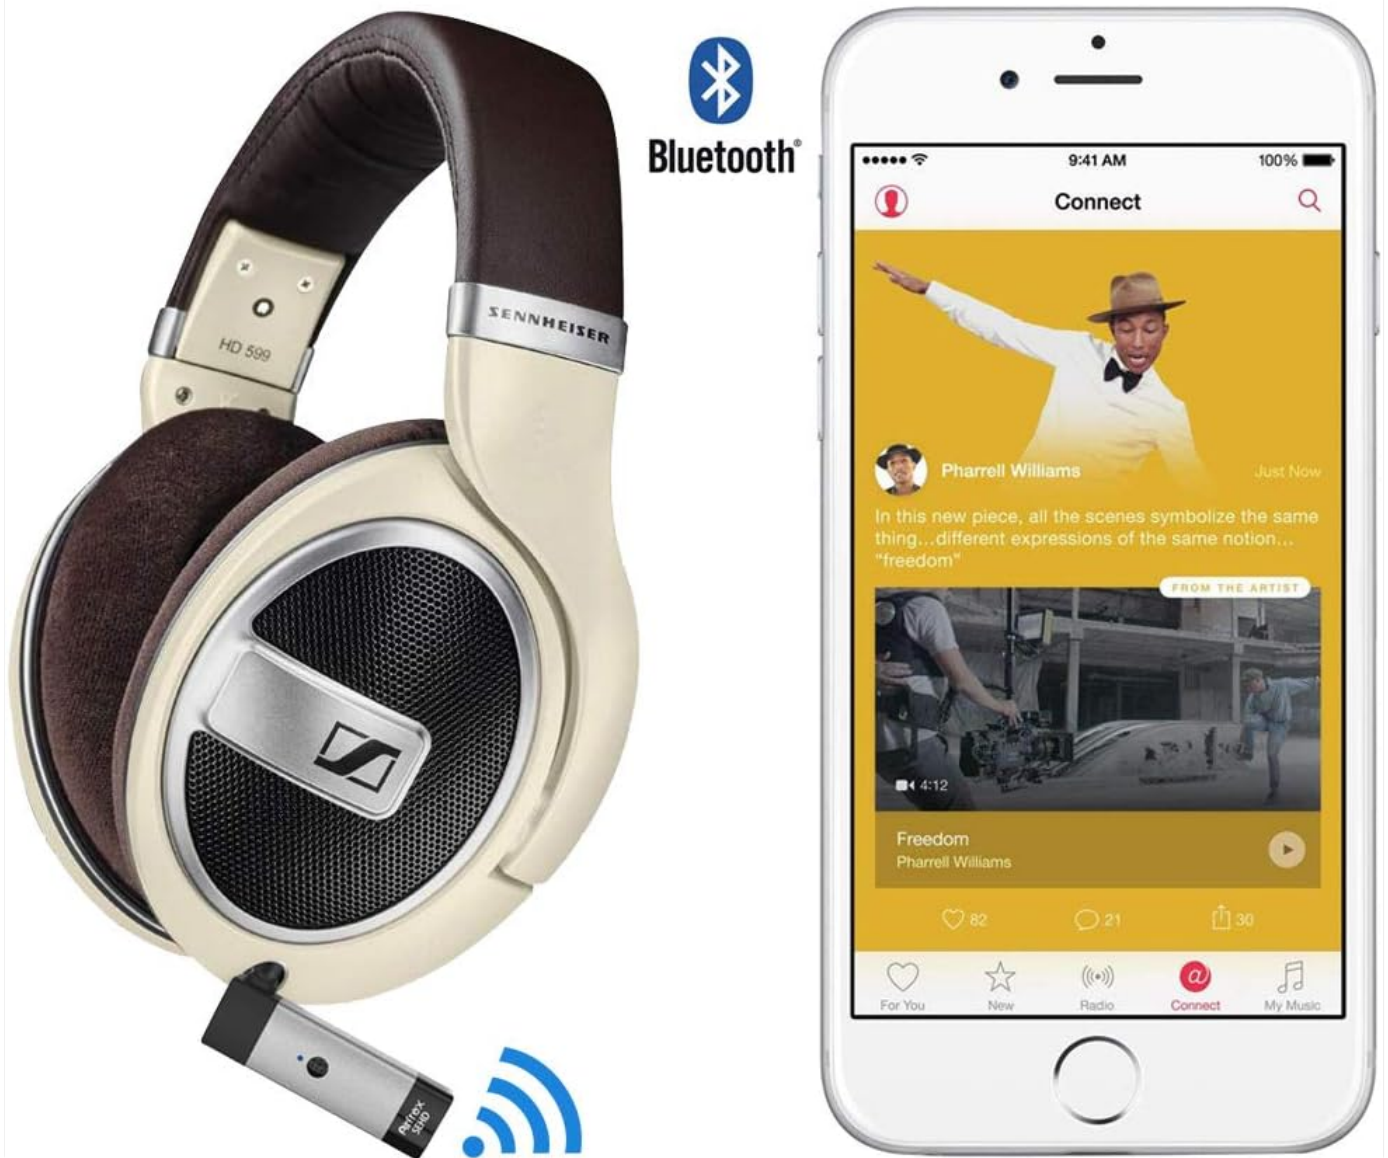


Figure 1: Airfrex SEHD Bluetooth Receiver in use with Sennheiser HD599 headphones and a smartphone.


2. PACKAGE CONTENTS

Please check the package for the following items:

- Airfrex SEHD Bluetooth Receiver
- USB Charging Cable
- User Manual (this document)

High Performance Bluetooth Adapter for Sennheiser HD Series Headphones

Gift-box Packaging with USB charging Cable and User Manual Inside

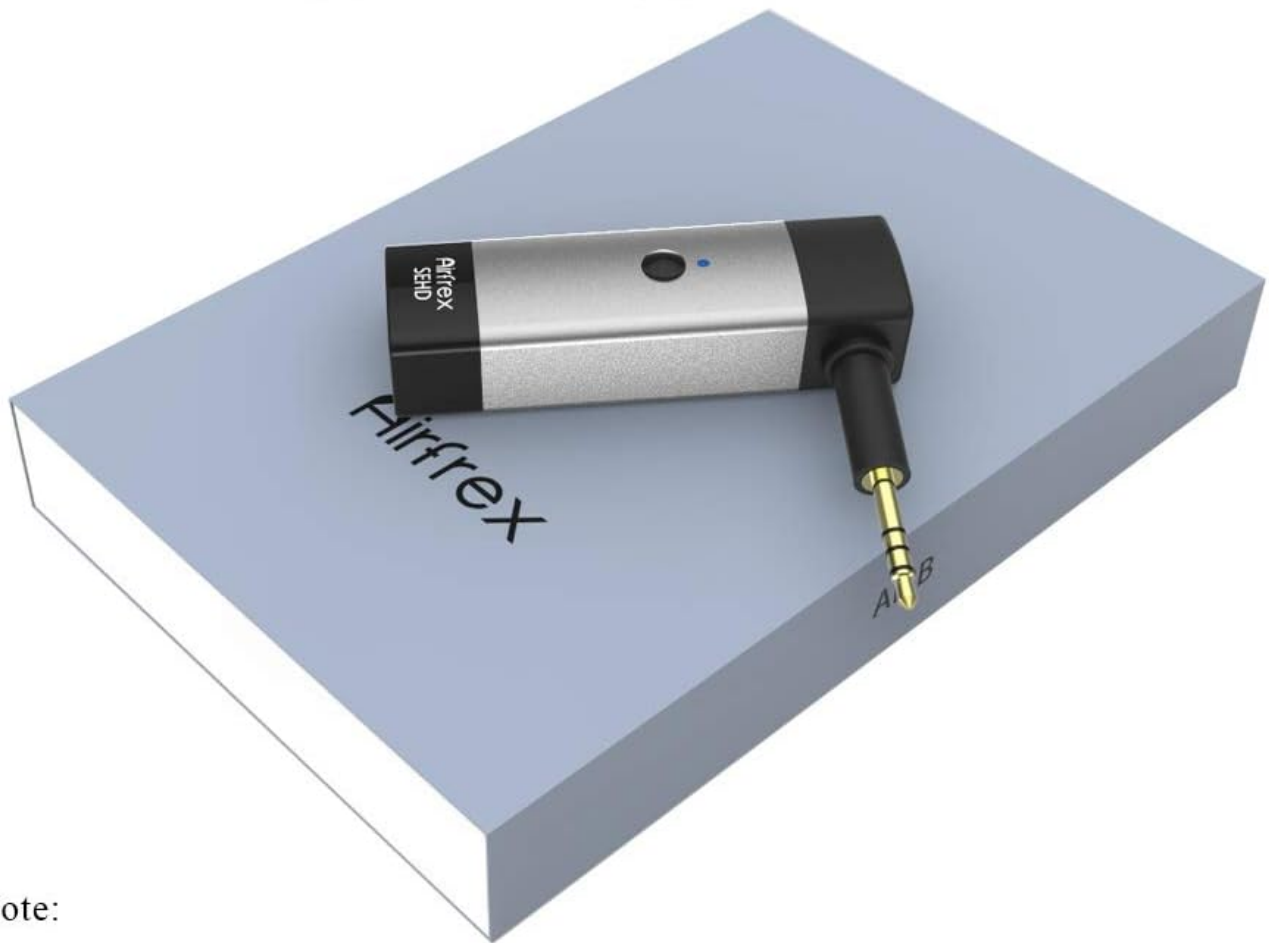

Note:

- Custom Made for Sennheiser HD598/ HD598SE/ HD598Cs/ HD595/ HD599
HD558/ HD579/ HD518/ HD559/ HD569
- This Adapter is Only Compatible with the Above Sennheiser Headphones
- Don't Purchase This Adapter for Any Other Headphones or Devices

Figure 2: Airfrex SEHD Bluetooth Receiver and its packaging contents.

3. SETUP AND PAIRING

3.1. Connecting to Headphones

1. Identify the 2.5mm audio input port on your compatible Sennheiser HD series headphones.
2. Insert the 2.5mm jack of the Airfrex SEHD Bluetooth Receiver firmly into the headphone's audio input port. Ensure a secure connection.

3.2. Powering On/Off

- **To Power On:** Press and hold the multi-function button (located on the adapter) for approximately 3 seconds until the LED indicator lights up.
- **To Power Off:** Press and hold the multi-function button for approximately 3 seconds until the LED indicator turns off.

3.3. Bluetooth Pairing

The Airfrefx SEHD is designed for quick and automatic pairing.

1. Ensure the Airfrefx SEHD is powered on and in pairing mode (the LED indicator will typically flash).
2. On your audio source device (e.g., smartphone, tablet, computer), enable Bluetooth and search for available devices.
3. Select "Airfrefx SEHD" from the list of found devices.
4. Once connected, the LED indicator on the Airfrefx SEHD will typically show a solid light or a slow flash. The device will automatically re-pair with the last connected device when powered on.



Figure 3: Airfrefx SEHD compatibility with Sennheiser HD598, HD598Cs, HD598SE, HD595, HD599 headphones.



Figure 4: Airfrex SEHD compatibility with Sennheiser HD559, HD569, HD579, HD518, HD558 headphones.

4. OPERATING INSTRUCTIONS

4.1. Multi-function Button Controls

The single multi-function button on the Airfrex SEHD controls various functions:

- **Single Press:** Play/Pause audio, Answer/End a phone call.
- **Double Press:** Activate Bass Boost feature. Double press again to cancel Bass Boost.
- **Long Press (approx. 3 seconds):** Power On/Off.

4.2. LED Indicator

The LED indicator provides status information:

- **Flashing LED:** Pairing mode.

- **Solid LED (or slow flash):** Connected.
- **Red LED:** Low battery.
- **Solid Red LED (while charging):** Charging.
- **LED Off (while charging):** Fully charged.

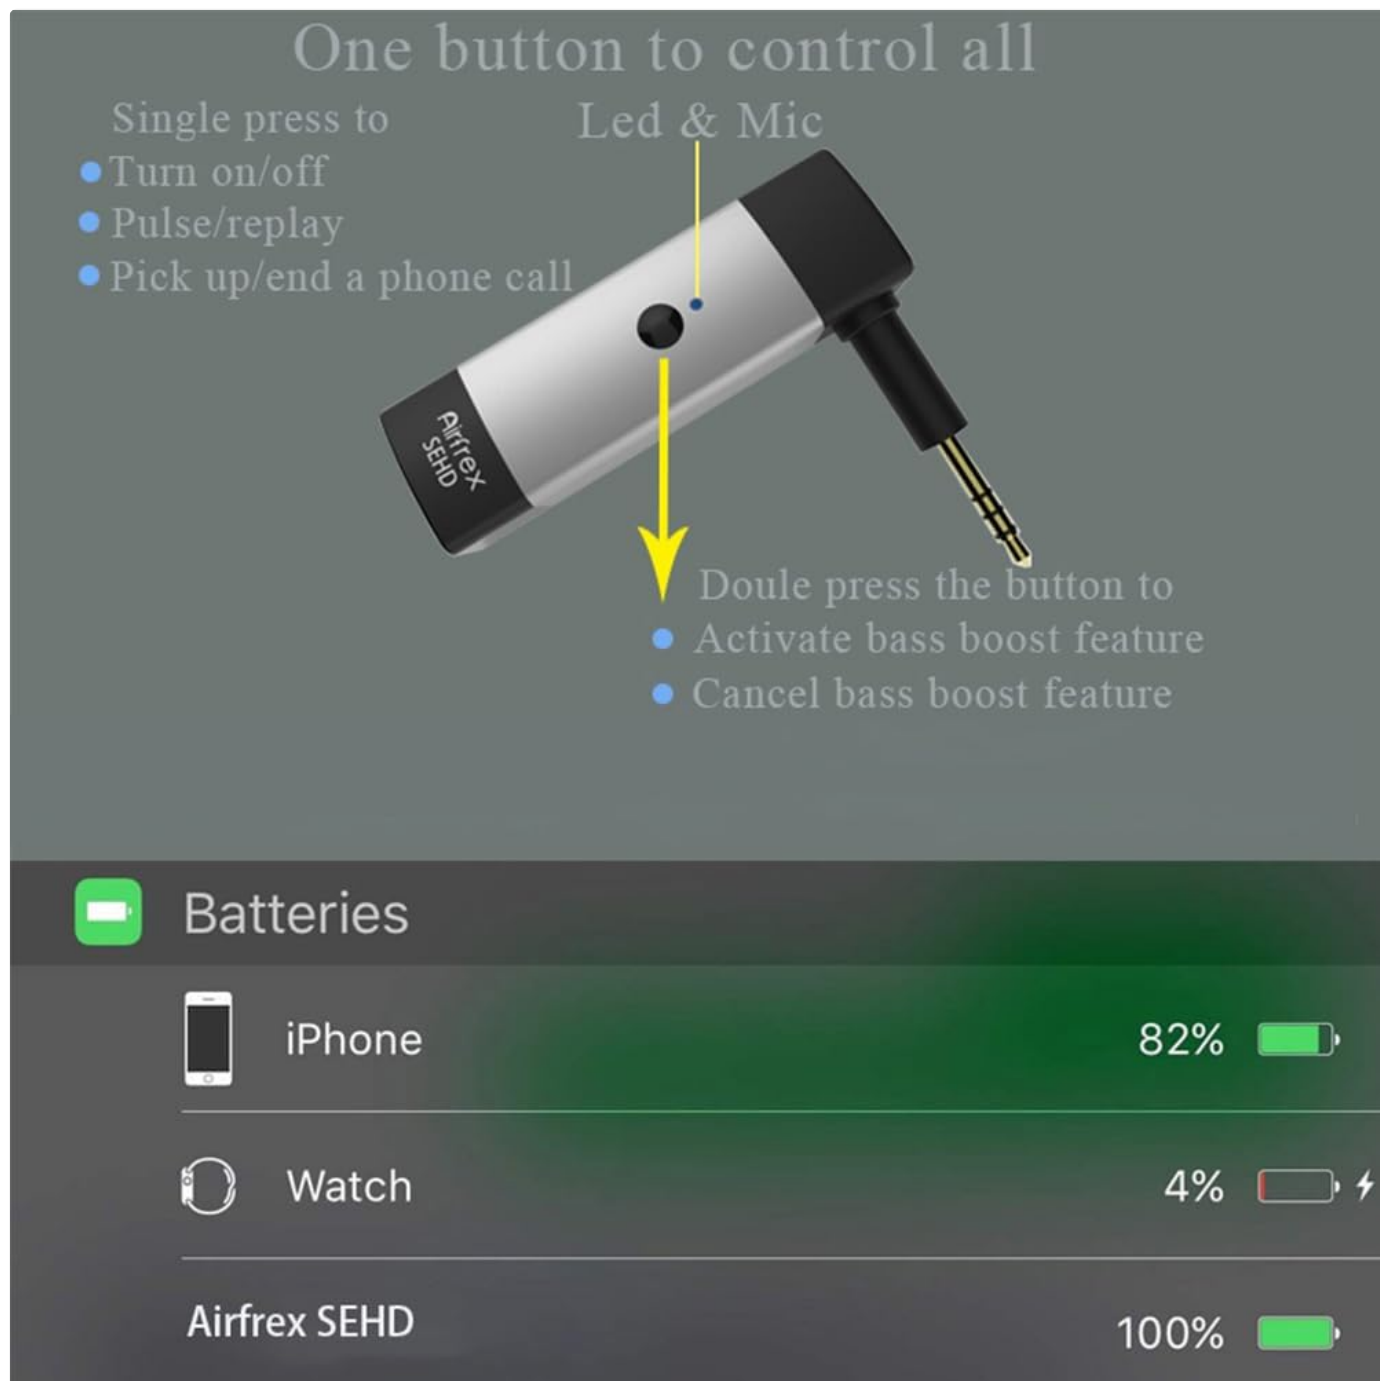


Figure 5: Airfex SEHD button controls and LED indicator functions.

5. CHARGING THE BATTERY

The Airfex SEHD has a built-in rechargeable battery. When the battery is low, the LED indicator will turn red.

1. Connect the small end of the provided USB charging cable to the charging port on the Airfex SEHD.
2. Connect the larger end of the USB cable to a USB power source (e.g., computer USB port, USB wall adapter).
3. The LED indicator will show a solid red light during charging.
4. Once fully charged, the LED indicator will turn off.

A full charge typically provides up to 6 hours of playback time.

6. MAINTENANCE

To ensure the longevity and optimal performance of your Airfrex SEHD Bluetooth Receiver, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to clean the device. Avoid using harsh chemicals or abrasive materials.
- **Storage:** Store the device in a cool, dry place away from direct sunlight and extreme temperatures.
- **Water Exposure:** This device is not waterproof. Avoid exposure to water or excessive moisture.
- **Handling:** Handle the device with care. Avoid dropping or subjecting it to strong impacts.

7. TROUBLESHOOTING

If you encounter issues with your Airfrex SEHD, please refer to the following troubleshooting steps:

Problem	Possible Cause	Solution
Device does not power on.	Low battery.	Charge the device using the provided USB cable.
Cannot pair with a device.	Bluetooth not enabled on source device; device not in pairing mode; too many devices connected.	Ensure Bluetooth is on and the SEHD is flashing (pairing mode). Forget previous connections on your source device and try again.
No sound or poor sound quality.	Volume too low; loose connection; out of range; interference.	Check volume on both the source device and headphones. Ensure the SEHD is securely connected to headphones. Move closer to the source device (within 10m). Avoid obstacles.
Bass Boost not working.	Feature not activated.	Double press the multi-function button to activate Bass Boost.
Short battery life.	Battery not fully charged; aging battery.	Ensure the device is fully charged. Battery performance may degrade over time.

8. SPECIFICATIONS

Feature	Detail
Model	SEHD
Brand	Airfrex
Weight	15 grams
Compatible Headphones	Sennheiser HD598, HD598Cs, HD598SE, HD595, HD599, HD559, HD569, HD579, HD518, HD558
Compatible Devices	iPhone, iPod, iPad, iMac (any Bluetooth audio source)
Bluetooth Range	Over 10 meters (33 feet)

Feature	Detail
Battery Capacity	120 mAh
Battery Life	Up to 6 hours
Audio Features	CSR Chipset, CD Grade Sound Quality, DSP, Bass Boost (24bit/192K), CVC Noise Cancelling Technology
Additional Features	Automatic Shutdown
Origin	China
UPC	708210350419



Figure 6: Key features of the Airfrex SEHD Bluetooth Receiver.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question