

[Manuals.plus](#) /

› [SODSEA](#) /

› SODSEA 72 Inch Outdoor Ceiling Fan with Lights and Remote - Instruction Manual

SODSEA 72-1203-BK-LIGHT

SODSEA 72 Inch Outdoor Ceiling Fan with Lights and Remote

Model: 72-1203-BK-LIGHT

SAFETY INFORMATION

Read all instructions carefully before beginning installation. Failure to follow these instructions may result in electric shock, fire, or personal injury.

- Ensure the power is disconnected at the circuit breaker before installation or servicing.
- All wiring must be in accordance with national and local electrical codes. If you are unfamiliar with wiring, consult a qualified electrician.
- The mounting structure must be capable of supporting a minimum of 35 lbs (15.9 kg).
- Do not operate the fan with damaged blades or housing.
- Keep hands, hair, and clothing clear of the fan blades during operation.
- This fan is suitable for indoor and outdoor use in covered areas. Do not expose to direct water spray.

PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Motor Housing Assembly
- Fan Blades (9 pieces, reversible black/dark wood)
- LED Light Kit
- Remote Control with Wall Mount
- Downrods (5-inch and 10-inch options)
- Mounting Bracket and Hardware
- Receiver Unit
- Instruction Manual

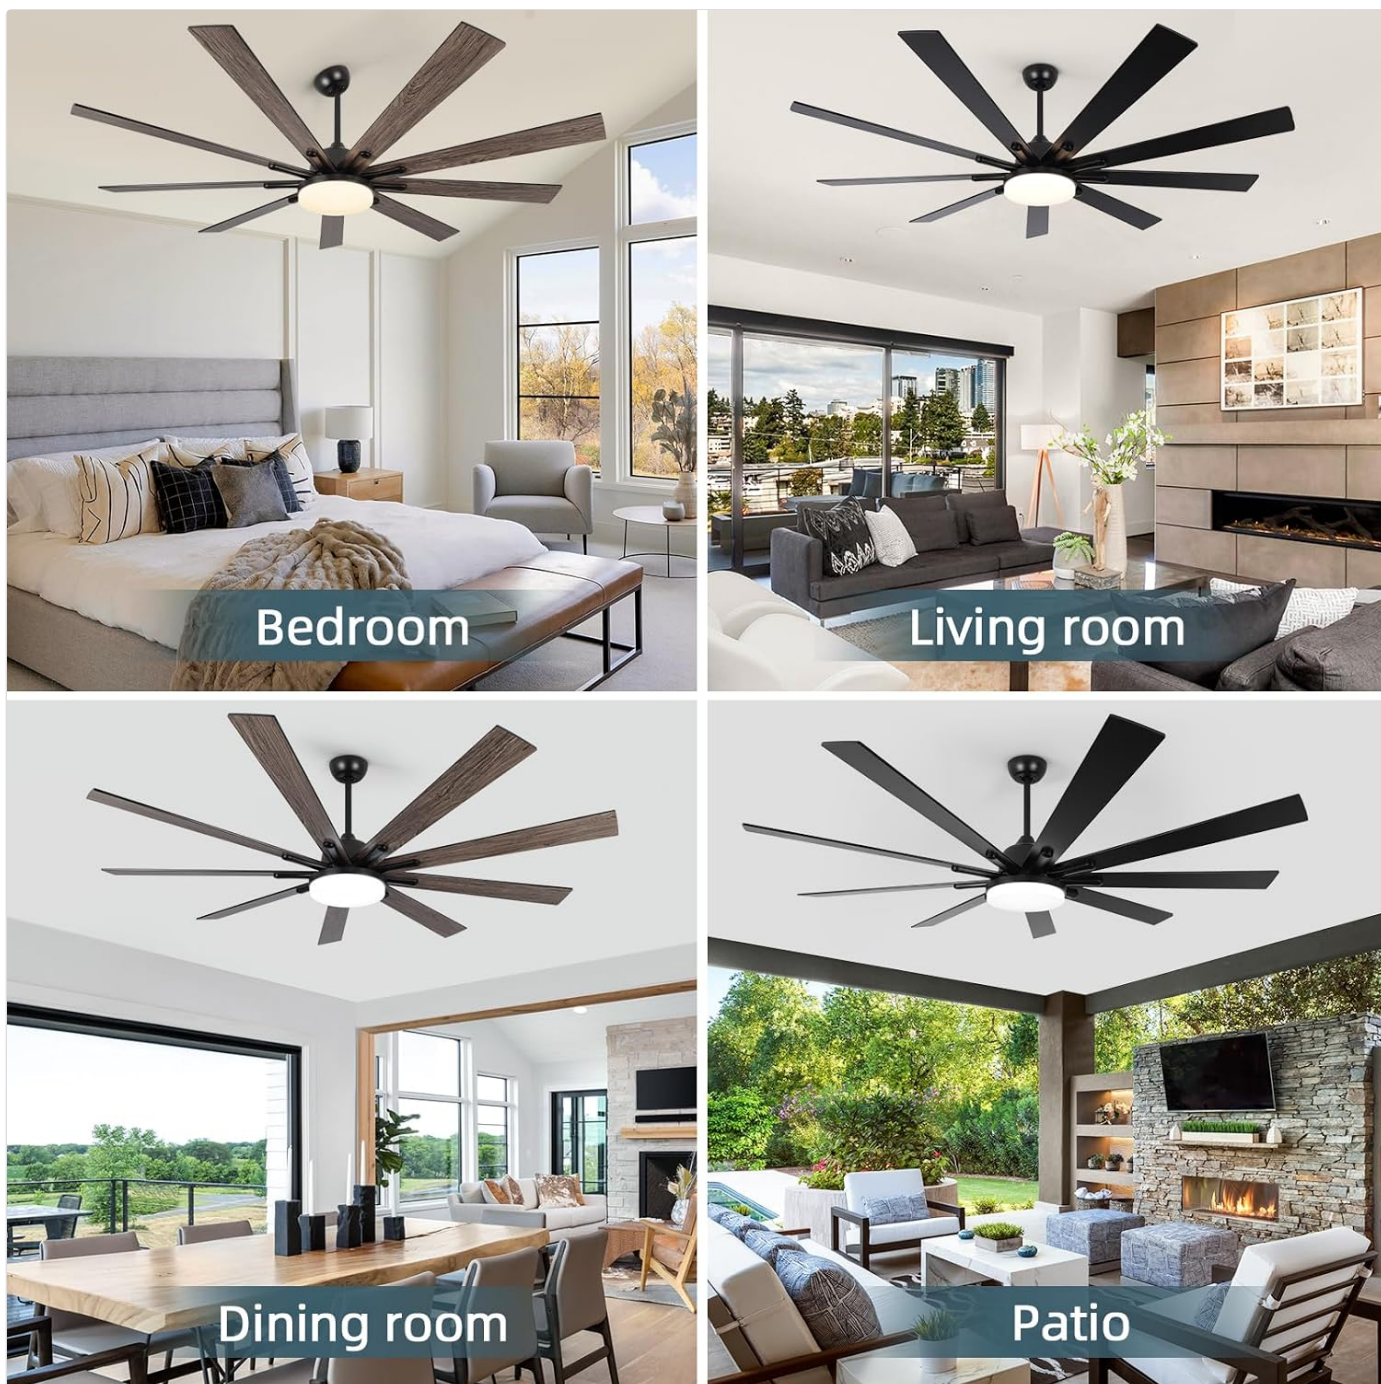


Figure 1: Product components and dimensions. Includes 72-inch fan diameter, 30-inch height, 6-inch and 12-inch downrods, and two-sided blades (black and dark wood). Compatible with flat roofs and slanted ceilings up to 15 degrees.

INSTALLATION INSTRUCTIONS

Professional installation is recommended. Ensure all electrical connections are secure and comply with local codes.

1. Mounting the Fan

1. Turn off power at the circuit breaker.
2. Secure the mounting bracket to the ceiling junction box. The junction box must be listed for fan support.
3. Attach the chosen downrod (5-inch or 10-inch) to the motor housing.
4. Carefully lift the fan assembly and hang it from the mounting bracket.

2. Wiring Connections

1. Connect the fan's electrical wires to the household supply wires according to the wiring diagram provided in the full manual. Typically, this involves connecting live, neutral, and ground wires.

2. Install the receiver unit into the mounting bracket canopy, ensuring all wires are properly connected and secured with wire nuts.
3. Ensure no loose strands of wire are exposed.

3. Attaching Fan Blades and Light Kit

1. Attach each of the nine fan blades to the motor housing using the provided screws. Ensure they are securely fastened. You can choose between the black or dark wood side of the blades.
2. Connect the LED light kit wires to the fan's light wires.
3. Secure the light kit to the bottom of the fan assembly.

Double Finish Blades

For your home to provide more collocation ways to meet more needs



• Side A
Black



• Side B
Dark Wood

Figure 2: The 72-inch ceiling fan installed in various indoor and outdoor covered environments.

Your browser does not support the video tag.

Video 1: This video demonstrates the various functions of the SODSEA 72-inch black ceiling fan, including fan speed adjustments, light settings, and reversible motor operation.

The fan is controlled using the included remote control.

Remote Control Functions

- **Power On/Off:** Press the power button to turn the fan and light on or off.
- **Fan Speed (1-6):** Select desired fan speed from 1 (lowest) to 6 (highest).
- **Light On/Off:** Press the light button to toggle the light.
- **Brightness Adjustment:** Use the '+' and '-' buttons to adjust light brightness from 0% to 100%.
- **Color Temperature:** Cycle through 3000K (Warm White), 4000K (Natural White), and 6500K (Cool White) light temperatures.
- **Reverse Fan Direction:** Press the reverse button to change the blade rotation direction for summer or winter mode.
- **Timer:** Set the fan to turn off automatically after 1, 3, or 6 hours.

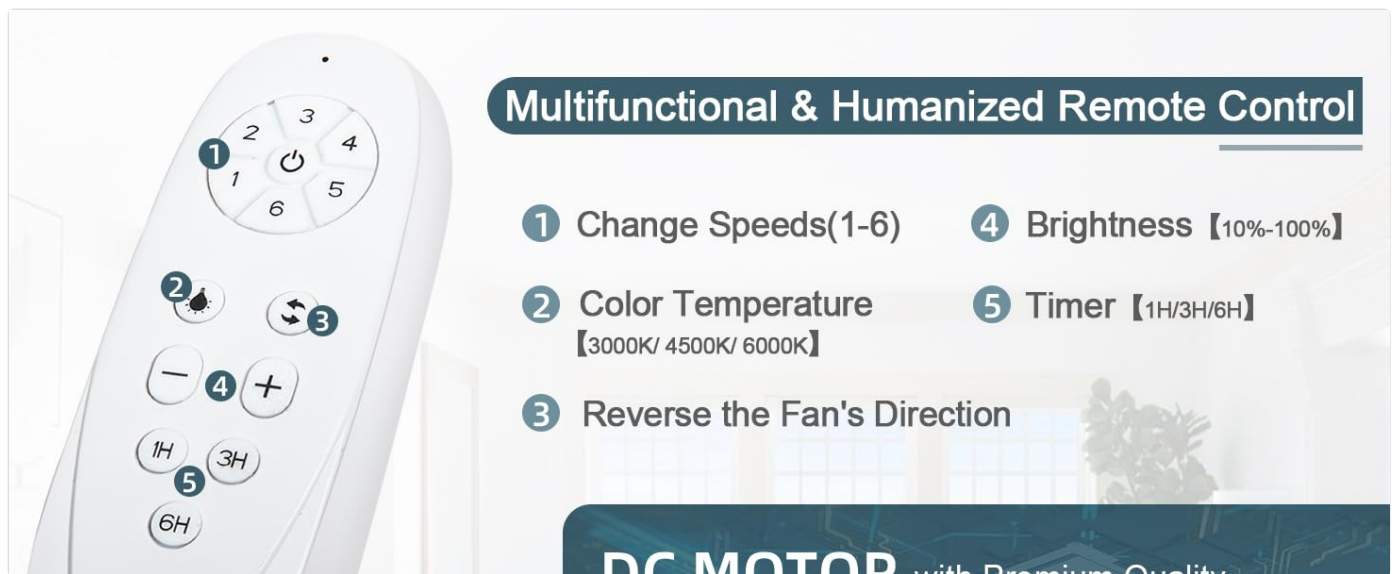


Figure 3: Remote control layout and functions.

Fan Speed Control

The fan offers 6 distinct speeds to suit various comfort levels and activities:

- **Speed 1-2:** Ideal for sleeping or gentle air circulation.
- **Speed 3-4:** Suitable for work or general entertainment.
- **Speed 5-6:** Provides strong airflow for cooling during physical activity or hot conditions.



Figure 4: Recommended fan speeds for different activities.

Light Control

The integrated 24W LED light offers adjustable brightness and three color temperature options:

- **Brightness:** Dimmable from 0% to 100% using the remote control.
- **Color Temperatures:** Choose between 3000K (Warm Light), 4000K (Natural Light), and 6500K (Cold White Light) to match your preference or room ambiance.



Figure 5: LED light with 3 color temperatures and dimmable functionality.

Reversible Motor Function

The fan features a reversible DC motor to optimize air circulation for different seasons:

- **Summer Mode (Downward Airflow):** Blades rotate counter-clockwise, pushing cool air down to create a refreshing breeze.
- **Winter Mode (Upward Airflow):** Blades rotate clockwise, drawing cool air up and distributing warm air evenly throughout the room.



CEILING FAN WITH LIGHT

3 COLOR TEMPERATURES AND DIMMABLE LIGHT



Figure 6: Reversible design for year-round comfort.



Figure 7: Visual representation of summer and winter airflow modes.

Timer Function

The fan includes a timer function allowing you to set it to automatically turn off after 1, 3, or 6 hours. This is useful for energy saving, especially during sleep.

Memory Function

The fan's memory function retains your last used fan speed and light settings (brightness and color temperature) when turned off and on again, eliminating the need to reset preferences.

Your browser does not support the video tag.

Video 2: A showcase of the SODSEA 72-inch black ceiling fan's key features, such as its dimmable LED light, multiple fan speeds, and remote control capabilities.

MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** Use a soft, damp cloth to clean the fan blades and motor housing. Do not use abrasive cleaners or solvents. Ensure power is off before cleaning.
- **Blade Inspection:** Periodically check that all blade screws are tight. Loose blades can cause wobbling and noise.
- **Light Cover:** Clean the light cover gently with a soft cloth to maintain light output.
- **Annual Check:** Annually inspect all connections and mounting hardware for tightness.

TROUBLESHOOTING

Refer to the table below for common issues and their solutions.

Problem	Possible Cause	Solution
Fan does not start	No power supply; Loose wiring; Remote control not paired or faulty.	Check circuit breaker; Verify all wiring connections; Re-pair remote control (refer to full manual for pairing instructions); Replace remote batteries.
Fan wobbles	Loose blade screws; Unbalanced blades; Loose mounting bracket.	Tighten all blade screws; Use balancing kit (not included) if necessary; Ensure mounting bracket is securely fastened to the ceiling.
Light does not work	Loose wiring to light kit; Faulty LED module; Remote control issue.	Check light kit wiring connections; Contact customer support for LED module replacement; Verify remote control functionality.
Remote control not responding	Low or dead batteries; Remote not paired; Obstruction between remote and receiver.	Replace batteries; Re-pair remote control; Ensure clear line of sight to the fan's receiver.
Fan is noisy	Loose screws; Motor issue; Blades hitting an obstruction.	Tighten all screws; Ensure no obstructions are near blades; If motor noise persists, contact customer support.

SPECIFICATIONS

Feature	Detail
Model Number	72-1203-BK-LIGHT
Size	72 Inch
Color	Black
Number of Blades	9
Blade Material	Engineered Wood (Reversible Black/Dark Wood)
Motor Type	DC Reversible Motor
Number of Speeds	6
Noise Level	Less than 35 dB
Light Source	24W LED

Feature	Detail
Light Features	Dimmable (0-100%), 3 Color Temperatures (3000K/4000K/6500K)
Control Method	Remote Control
Special Features	Memory Function, Timer (1/3/6 hours)
Included Downrods	5 inch, 10 inch
Ceiling Compatibility	Flat Roof, Slanted Ceiling (up to 15 degrees)
Recommended Room Size	400-550 square feet
Minimum Ceiling Height	9 feet
Indoor/Outdoor Usage	Outdoor (covered areas)

WARRANTY AND SUPPORT

SODSEA is committed to providing quality products and customer service.

- **Warranty:** This product comes with a 12-month free warranty from the date of purchase.
- **Customer Support:** For any questions, technical assistance, or warranty claims, please contact SODSEA customer service. We aim to respond to all inquiries within 24 hours.
- **Contact Information:** Refer to the product packaging or the official SODSEA website for the most current customer support contact details.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

