

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

- › [Feit Electric](#) /
- › [Feit Electric OM60/SW/HK A19 Smart LED Light Bulb User Manual](#)

Feit Electric OM60/SW/HK

Feit Electric OM60/SW/HK A19 Smart LED Light Bulb User Manual

Model: OM60/SW/HK

INTRODUCTION

This manual provides instructions for the installation, setup, operation, and maintenance of your Feit Electric OM60/SW/HK A19 Smart LED Light Bulb. This smart bulb is designed to work with Apple HomeKit and Siri Voice Control, offering convenient lighting management without requiring a separate smart home hub for direct control. For remote access and advanced automations, an Apple Home Hub (Apple TV, iPad, or HomePod) is required.





Image: The Feit Electric A19 Smart LED Light Bulb illuminated, showcasing its soft white light output.

SAFETY INFORMATION

- **Risk of Electric Shock:** Always turn off power to the fixture before installing or removing the bulb.
- **Indoor/Outdoor Use:** This bulb is rated for outdoor use. Ensure the fixture is suitable for the environment.
- **Dimmer Compatibility:** This smart bulb is dimmable via the Apple Home app or Siri. Do not use with standard incandescent dimmer switches, as this may damage the bulb.
- **Operating Temperature:** Do not install in enclosed fixtures that restrict airflow, as this can shorten bulb life.
- **Disposal:** Dispose of LED bulbs according to local regulations. Do not dispose of with general household waste.

PACKAGE CONTENTS

Your package should contain the following item:

- 1 x Feit Electric OM60/SW/HK A19 Smart LED Light Bulb

SETUP INSTRUCTIONS

1. Physical Installation

1. Ensure the power to the light fixture is turned off at the switch before installation.
2. Carefully screw the Feit Electric Smart LED Light Bulb into a standard E26 medium base socket.
3. Turn on the power to the light fixture. The bulb should illuminate.

2. Apple HomeKit Pairing

The bulb connects directly to your Apple device via Bluetooth. No separate hub is required for basic control.

1. Open the **Apple Home app** on your iPhone, iPad, or iPod touch (iOS 10.0.1 or later required).
2. Tap the "+" icon in the upper right corner and select "**Add Accessory**".
3. Scan the **HomeKit setup code** located on the bulb or its packaging. Follow the on-screen prompts to add the bulb to your Home app and assign it to a room.

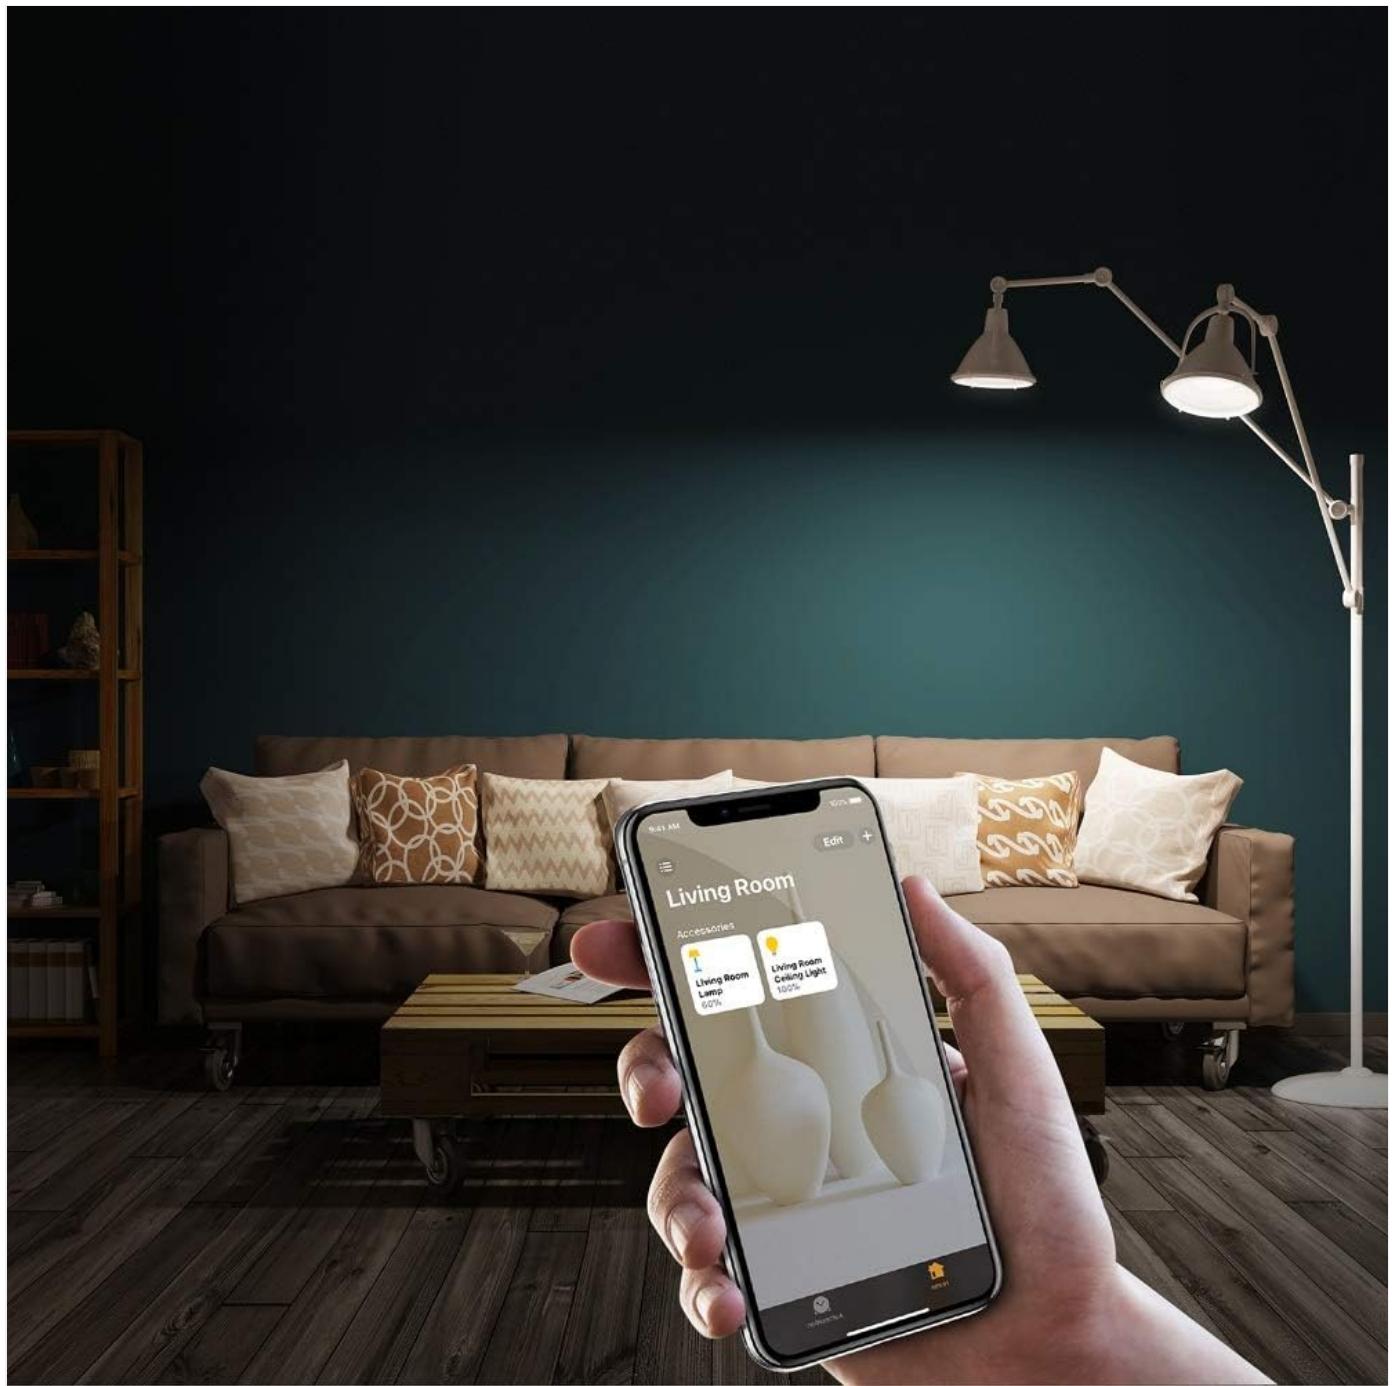


Image: A smartphone screen showing the Apple Home app interface, used to control smart lighting in a living room setting.

3. Firmware Update (Important)

To ensure optimal performance and compatibility with the latest iOS versions, it is recommended to update the bulb's firmware using the Feit OTA app.

1. Download the "**Feit OTA**" app from the Apple App Store.
2. Ensure the smart bulb is powered on.
3. Open the Feit OTA app. Grant Bluetooth access permissions if prompted.
4. Navigate to "**More**" (bottom right corner) and select "**EQUIPMENT UPGRADE GATT**".
5. Select the desired light bulb from the list.
6. If a firmware update is available, select "**UPDATE RIGHT NOW**". Keep your phone screen active and do not leave the app during the update process to prevent interruption.
7. After the update is complete, you may need to repeat steps 3-6 if multiple updates are required. The app will

indicate when no further updates are needed.

- Once updated, return to the Apple Home app to confirm functionality. If issues persist, try resetting the bulb to factory settings (see Troubleshooting) and re-pairing.

4. Home Hub Setup for Remote Access

For control of your smart bulb when away from home, or for advanced automations and scheduling, an Apple Home Hub is required.

- Set up an Apple TV (4th generation or later), HomePod, or an iPad (running iOS 10 or later) as your Home Hub.
- Ensure your Home Hub device is connected to your home Wi-Fi network and signed in with the same Apple ID as your other HomeKit devices.
- Keep the Home Hub device powered on and connected to power to maintain remote access.

OPERATING INSTRUCTIONS

1. Control with Apple Home App

Once paired, you can control your smart bulb directly from the Apple Home app:

- Turn On/Off:** Tap the bulb icon in the Home app.
- Dimming:** Press and hold the bulb icon to access controls for brightness adjustment.
- Schedules & Automations:** Use the Home app to create custom schedules for turning lights on/off or to set up automations based on time, location, or other HomeKit accessories.
- Grouping:** Group multiple bulbs together to control them simultaneously.

2. Siri Voice Control

Use Siri on your iPhone, iPad, HomePod, or Apple Watch to control your smart bulb with voice commands:

- "Hey Siri, turn on the [Room Name] light."
- "Hey Siri, dim the [Light Name] to 50%."
- "Hey Siri, turn off all the lights."

Note: Direct control via Bluetooth has a limited range (approximately 75 feet) and may experience slight delays compared to Wi-Fi based smart devices. For consistent remote control and faster response times, ensure a Home Hub is properly configured.

MAINTENANCE

- Cleaning:** Ensure the bulb is cool and the power is off before cleaning. Wipe with a soft, dry cloth. Do not use liquid or abrasive cleaners.
- Storage:** If storing the bulb, keep it in its original packaging in a cool, dry place.
- No user-serviceable parts are inside. Do not attempt to disassemble the bulb.

TROUBLESHOOTING

Bulb Not Responding or Connecting

- Check Power:** Ensure the light fixture switch is on and the bulb is receiving power.

- **Bluetooth Range:** If controlling directly, ensure your Apple device is within Bluetooth range of the bulb.
- **Power Cycle:** Turn the light switch off for 10 seconds, then turn it back on. This can often resolve minor connectivity issues.
- **Firmware Update:** Verify that the bulb's firmware is up to date using the Feit OTA app (refer to Setup Instructions). Outdated firmware can cause connectivity problems.
- **Reset Bulb:** To factory reset the bulb, turn it off for 1 second, then on for 1 second, repeating this cycle 5 times. The bulb will flash to indicate a successful reset. Then, attempt to re-pair with the Apple Home app.
- **Home Hub Check:** If using remote access, ensure your Apple Home Hub (Apple TV, iPad, or HomePod) is online, powered, and connected to the same network.

Delay in Response

- This bulb uses Bluetooth for direct control, which can sometimes introduce a slight delay compared to Wi-Fi devices. Ensure your controlling device is close to the bulb.
- A properly configured Apple Home Hub can improve response times, especially for automations and remote control.

Bulb Turns Soft White After Power Outage

- The bulb is designed to return to a default soft white state after a power interruption. This behavior cannot be changed.

SPECIFICATIONS

Feature	Detail
Model Number	OM60/SW/HK
Light Type	LED
Bulb Shape Size	A19
Bulb Base	E26 Medium
Wattage	10 Watts
Incandescent Equivalent	60 Watts
Brightness	800 Lumens
Light Color	2700K Soft White
Color Rendering Index (CRI)	90
Voltage	120 Volts
Average Life	15,000 Hours
Control Method	App (Apple Home), Voice (Siri)
Connectivity	Bluetooth (for direct control)
Product Dimensions	2.4" W x 4.4" H

Feature	Detail
Material	Glass, Metal, Plastic, Powdered Metal Steel, Rubber
Indoor/Outdoor Usage	Outdoor





Image: Dimensional drawing of the A19 light bulb, indicating a height of 4.4 inches and a diameter of 2.4 inches.

WARRANTY AND SUPPORT

Warranty Information

This Feit Electric smart LED light bulb comes with a **one-year warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use.

For warranty claims or further assistance, please contact Feit Electric customer service.

Customer Support

If you encounter any issues or have questions regarding your Feit Electric Smart LED Light Bulb, please contact:

- **Email:** info@feit.com
- **Toll-Free Phone:** 1-866-326-BULB (1-866-326-2852)

Please have your model number (OM60/SW/HK) and proof of purchase ready when contacting support.