

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [Mount-It!](#) /

› [Mount-It! MI-2754 Quad Monitor Desk Mount Instruction Manual](#)

## Mount-It! MI-2754

# Mount-It! MI-2754 Quad Monitor Desk Mount Instruction Manual

Model: MI-2754 | Brand: Mount-It!

## 1. INTRODUCTION


This manual provides detailed instructions for the assembly, installation, operation, and maintenance of your Mount-It! MI-2754 Quad Monitor Desk Mount. This mount is designed to support four monitors ranging from 13 to 32 inches, with VESA 75x75mm or 100x100mm mounting patterns. Please read all instructions carefully before installation to ensure safe and correct usage.

## 2. SAFETY INFORMATION

- **Weight Capacity:** Do not exceed the maximum weight capacity of **17.6 lbs (8 kg) per monitor**. Exceeding this limit may result in instability and potential injury.
- **Monitor Size:** This mount is suitable for monitors between **13 and 32 inches**.
- **VESA Compatibility:** Ensure your monitors have VESA mounting patterns of **75x75mm or 100x100mm**.
- **Desk Thickness:** The desk must be capable of supporting the combined weight of the mount and all attached monitors. For C-clamp installation, the desk thickness should be between **0.4 inches (1 cm) and 3.5 inches (8.9 cm)**. For grommet installation, the desk thickness should be between **0.4 inches (1 cm) and 3 inches (7.6 cm)**.
- **Assembly:** Assemble the product according to the instructions. Improper assembly may cause damage or serious injury.
- **Moving Parts:** Keep hands and fingers clear of moving parts during adjustment.
- **Children:** Keep small parts away from children as they may pose a choking hazard.

## 3. PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning assembly. If any parts are missing or defective, contact Mount-It! customer support.

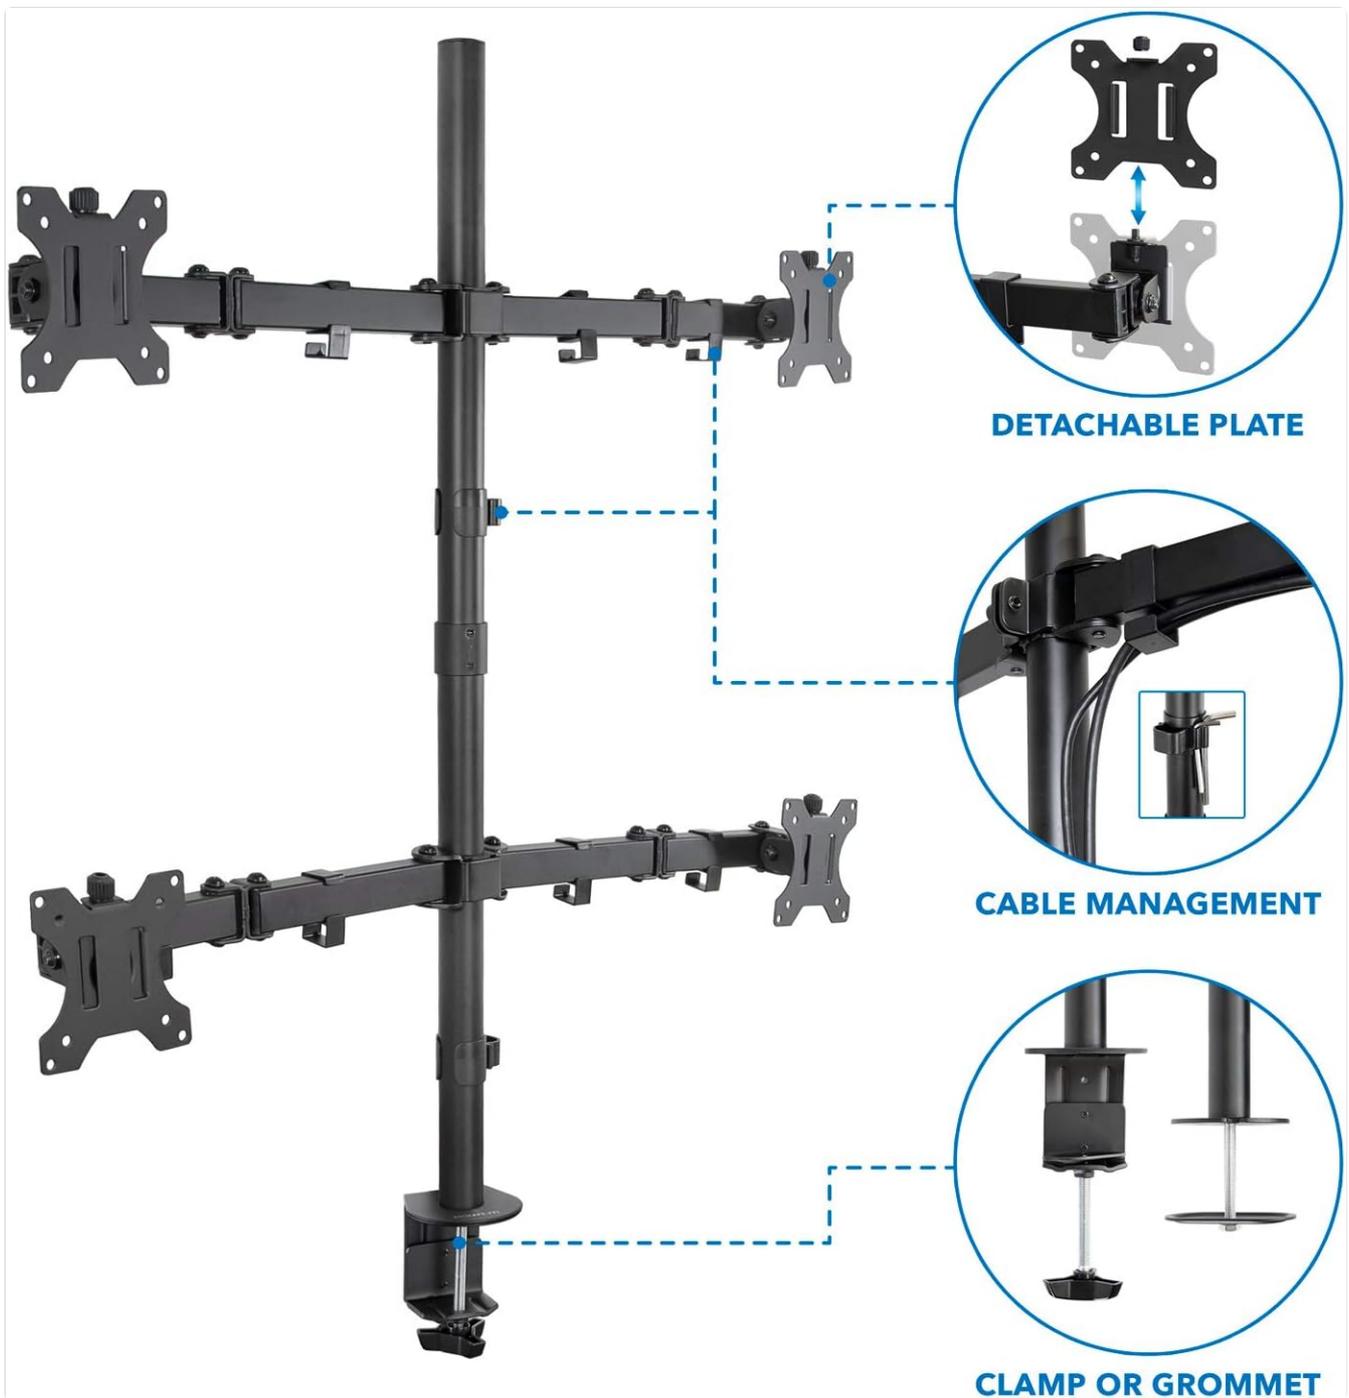

*Image: Overview of the Mount-It! MI-2754 Quad Monitor Desk Mount components.*

- Central Pole Assembly
- Monitor Arms (4 units)
- VESA Plates (4 units)
- C-Clamp Base
- Grommet Base
- Cable Management Clips
- Hardware Kit (screws, washers, spacers, Allen wrenches)

## 4. SETUP AND INSTALLATION

Before installation, ensure your desk is sturdy enough to support the mount and four monitors. Clear the installation area of any obstructions.

## 4.1 Desk Mount Installation (C-Clamp or Grommet)

# EASY TO INSTALL



*Image: C-Clamp and Grommet installation options.*

### 4.1.1 C-Clamp Installation

1. Attach the C-clamp bracket to the central pole.
2. Position the C-clamp on the edge of your desk.
3. Tighten the C-clamp screw until the mount is securely fastened to the desk. Ensure the desk thickness is between 0.4" and 3.5".

### 4.1.2 Grommet Installation

1. If your desk has a grommet hole, remove the grommet cover.
2. Insert the central pole through the grommet hole.
3. Attach the grommet base plate and tighten the nut from underneath the desk. Ensure the desk thickness is between 0.4" and 3".


## 4.2 Monitor Arm and VESA Plate Assembly

1. Attach the VESA plates to the back of each monitor using the provided screws. Select the correct screw length for your

monitor.

2. Slide the monitor arms onto the central pole at your desired height. Secure them with the locking collars.
3. Carefully slide each monitor (with VESA plate attached) onto the corresponding monitor arm. Ensure the VESA plate clicks securely into place.
4. Tighten any security screws on the VESA plate to prevent accidental dislodging.


# FITS SCREEN SIZES UP TO 32"

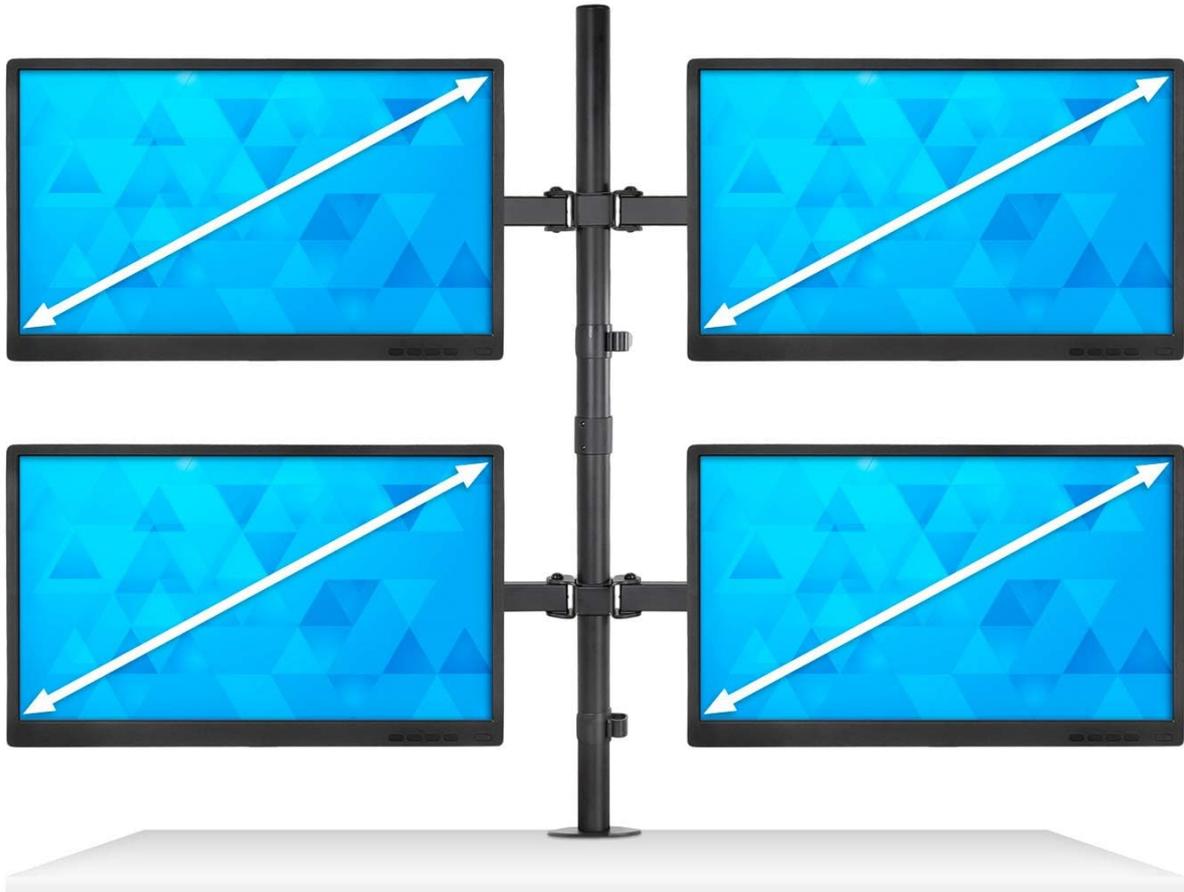

VESA COMPATIBLE:

**75x75**

**100x100**



*Image: Monitor size and VESA compatibility.*


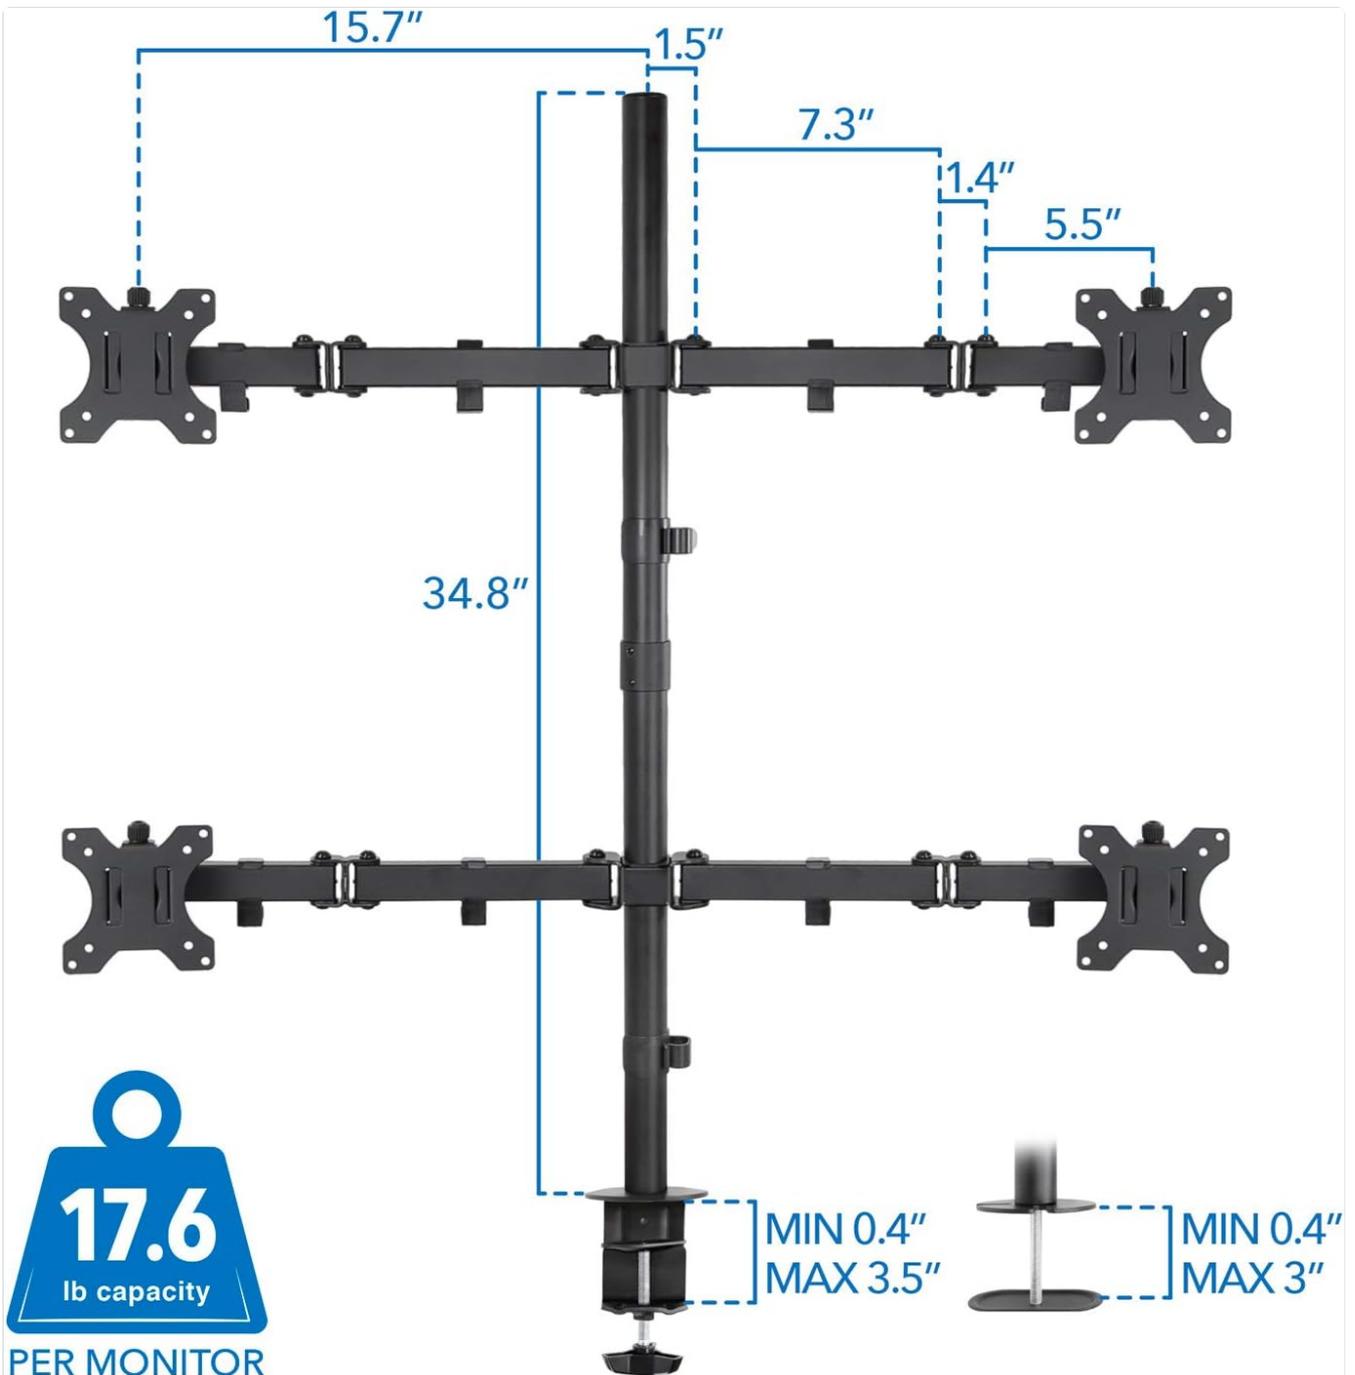


Image: Mount dimensions and weight capacity per monitor.

## 5. OPERATING AND ADJUSTMENTS

Once your monitors are installed, you can adjust them for optimal viewing comfort.

### 5.1 Height Adjustment

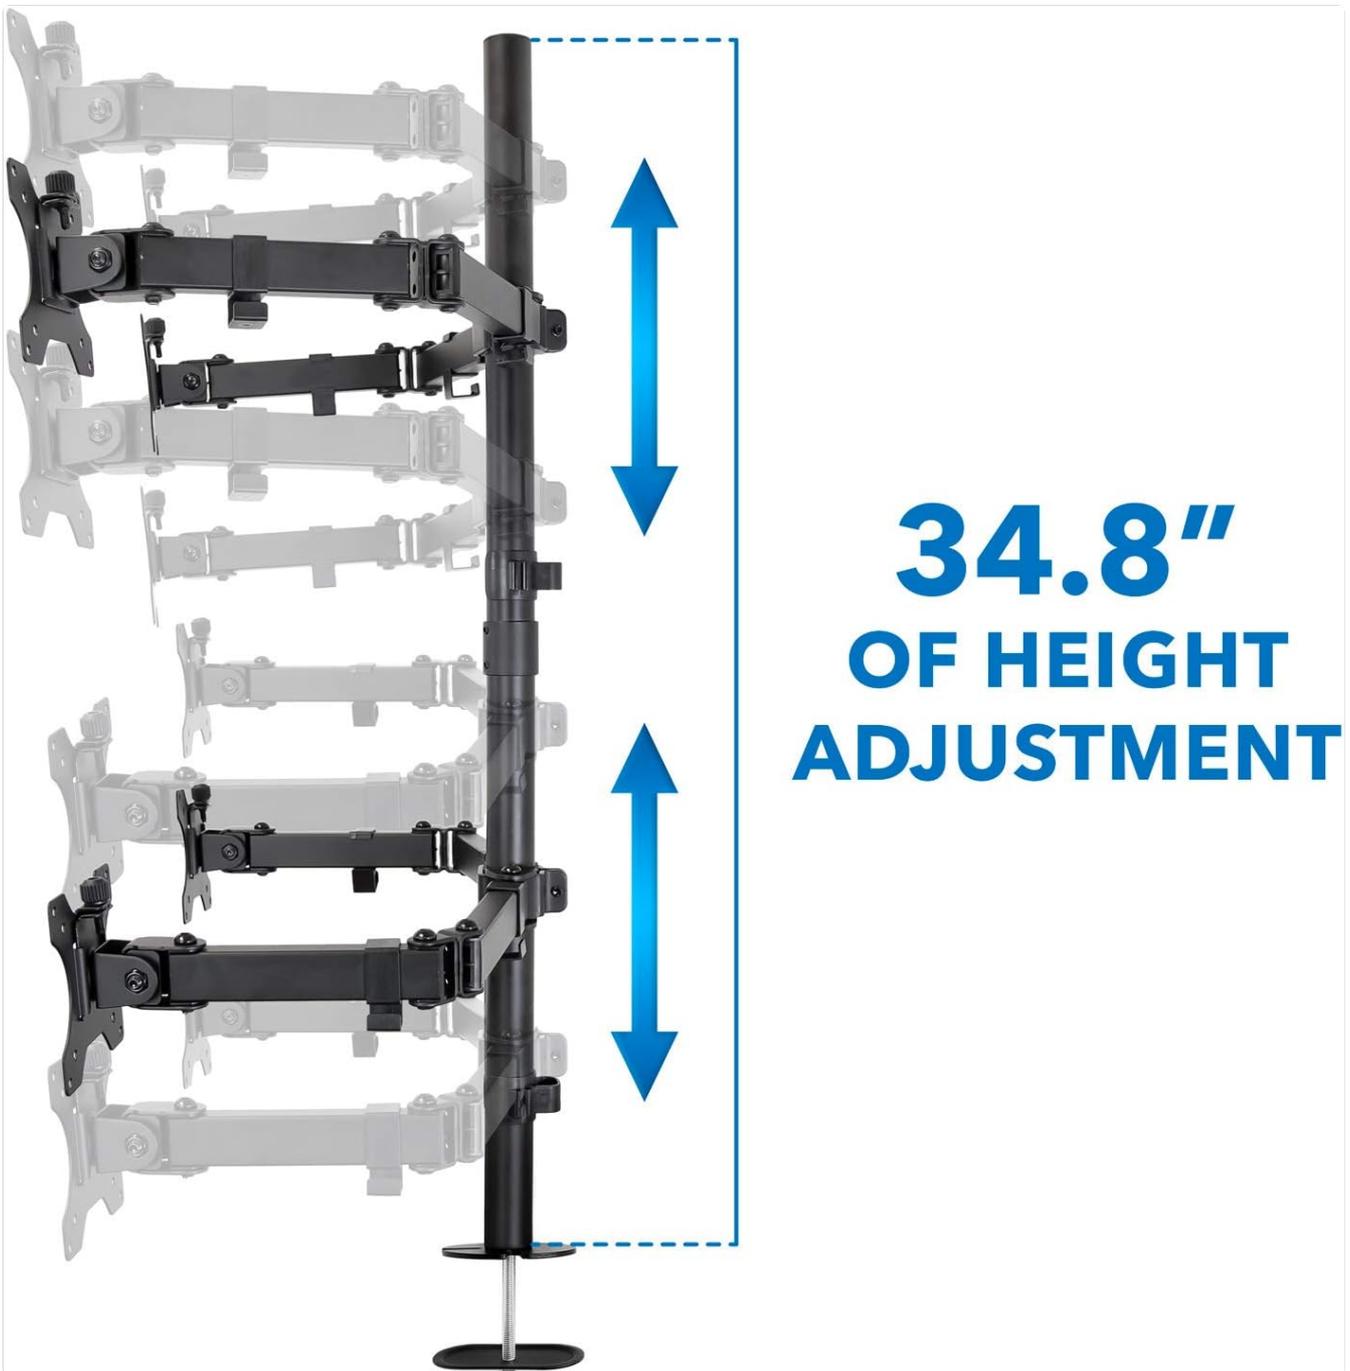

*Image: Height adjustment range.*

The monitor arms can be moved vertically along the central pole. Loosen the locking collar on each arm, slide the arm to the desired height, and then re-tighten the collar to secure it. The mount offers approximately 34.8 inches of height adjustment.

## **5.2 Tilt, Swivel, and Rotate**

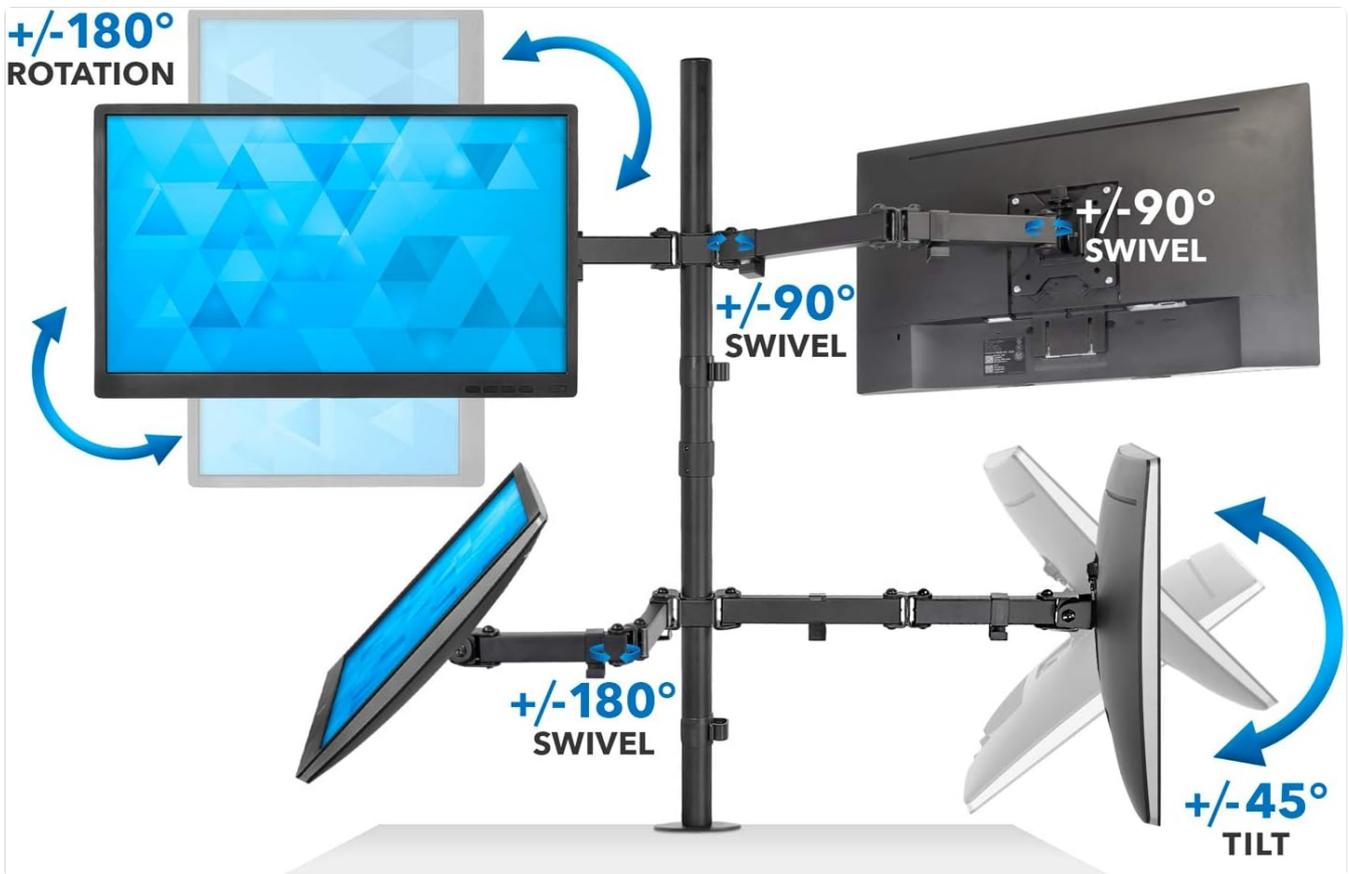


Image: Tilt, Swivel, and Rotate adjustments.

- **Tilt:** Each monitor can be tilted up to **+/- 45 degrees** to reduce glare and optimize viewing angles. Adjust the tilt mechanism on the VESA plate.
- **Swivel:** Monitors can swivel up to **+/- 90 degrees** at the arm joint and **+/- 180 degrees** at the VESA plate connection, allowing for flexible screen positioning.
- **Rotate:** Rotate your monitors **+/- 180 degrees** from landscape to portrait orientation as needed.

*Note: Use the provided Allen wrenches to adjust the tension of the tilt and swivel joints if they are too loose or too stiff.*

### 5.3 Cable Management

Utilize the integrated cable management clips along the monitor arms and central pole to route and conceal your monitor cables. This helps maintain a tidy workspace and prevents cable damage.

## 6. MAINTENANCE

- **Regular Checks:** Periodically check all screws and connections to ensure they remain tight and secure. Re-tighten if necessary.
- **Cleaning:** Clean the mount with a soft, damp cloth. Avoid abrasive cleaners or solvents that could damage the finish.
- **Lubrication:** No lubrication is required for the moving parts.

## 7. TROUBLESHOOTING

- **Monitors are sagging or not holding position:**
  - Ensure the tension screws on the tilt and swivel joints are sufficiently tightened using the provided Allen wrench.
  - Verify that the monitor weight does not exceed the 17.6 lbs (8 kg) per arm capacity.
  - Check that the locking collars on the central pole are securely tightened.

- **Mount feels unstable:**

- Ensure the C-clamp or grommet base is firmly secured to the desk.
- Verify that the desk surface is flat and strong enough to support the combined weight.
- Confirm that the central pole is properly seated in the base.

- **Difficulty aligning monitors:**

- Utilize the independent tilt, swivel, and rotation adjustments for each monitor to fine-tune their alignment.
- Slight adjustments to the height of individual arms on the pole can help achieve better vertical alignment.

## 8. SPECIFICATIONS

|                                    |  |
|------------------------------------|--|
| <b>Model Number</b>                | MI-2754  |
| <b>Monitor Size Compatibility</b>  | 13 - 32 inches   |
| <b>VESA Compatibility</b>          | 75x75mm, 100x100mm                                       |
| <b>Weight Capacity per Monitor</b> | 17.6 lbs (8 kg)  |
| <b>Tilt Angle</b>                  | +/- 45 degrees   |
| <b>Swivel Angle</b>                | +/- 90 degrees (arm joint), +/- 180 degrees (VESA plate) |
| <b>Rotation</b>                    | +/- 180 degrees  |
| <b>Height Adjustment</b>           | 34.8 inches (along central pole)                         |
| <b>Desk Thickness (C-Clamp)</b>    | 0.4 - 3.5 inches (1 - 8.9 cm)                            |
| <b>Desk Thickness (Grommet)</b>    | 0.4 - 3 inches (1 - 7.6 cm)                              |
| <b>Material</b>                    | Alloy Steel  |
| <b>Color</b>                       | Black  |

## 9. SUPPORT

For technical assistance or inquiries regarding your Mount-It! MI-2754 Quad Monitor Desk Mount, please contact Mount-It! customer support. Access to US-based technical support is available to assist with any questions or issues you may encounter.