

[Manuals.plus](#) /

> [Maxcio](#) /

> Maxcio 2-in-1 Smart Outdoor Plug (Model EOP03) Instruction Manual

Maxcio EOP03

Maxcio 2-in-1 Smart Outdoor Plug (Model EOP03) Instruction Manual

Your guide to setting up and using your Maxcio Smart Outdoor Plug.

1. INTRODUCTION

The Maxcio 2-in-1 Smart Outdoor Plug (Model EOP03) is designed to provide intelligent control over your outdoor electrical appliances. Featuring two individually controllable AC outlets and an IP44 waterproof rating, this smart plug allows for remote management, scheduling, and voice control via Amazon Alexa and Google Home. It operates on a 2.4 GHz Wi-Fi network and requires no additional hub.

2. SAFETY INFORMATION

- Ensure the plug is correctly installed in a compatible EU-type socket.
- Do not exceed the maximum rated power of 2000W (10A per outlet, 16A total).
- While IP44 rated for splash resistance, avoid submerging the device in water.
- Do not disassemble or modify the device.
- Keep out of reach of children.
- Operate within the specified temperature range of -10°C to 45°C.

3. PRODUCT OVERVIEW

The Maxcio Smart Outdoor Plug features a durable, flame-retardant ABS+PC material casing and two AC outlets, labeled S1 and S2, each with an individual protective cover. A single physical button controls both outlets simultaneously, while individual control is managed via the mobile application or voice assistants.



Image 3.1: The Maxcio 2-in-1 Smart Outdoor Plug, showcasing its two individually covered outlets and EU-type plug. This image highlights the compact design and robust construction suitable for outdoor use.



Image 3.2: The Maxcio Smart Outdoor Plug, depicted with water droplets, illustrating its IP44 splash-proof design for outdoor environments.



Image 3.3: Visual representation of the IP44 waterproof rating, indicating protection against various weather conditions including sun, rain, snow, and humidity.

4. SPECIFICATIONS

Feature	Detail
Model Number	EOP03
Material	ABS + PC flame-retardant material
AC Outlets	2 (EU Type F - Schuko)
Working Voltage	AC 100-240V 50/60Hz
Rated Power	2000W
Rated Current	16A (Max)
Waterproof Standard	IP44
Wi-Fi Standard	2.4 GHz b/g/n (5.0 GHz not supported)
Operating Temperature	-10°C to 45°C
Compatible Devices	Smartphone (iOS/Android), Amazon Alexa, Google Home
UPC	760354659117



Image 4.1: Technical diagram displaying the dimensions (109mm length, 99.8mm width, 55mm height) and updated power ratings (16A rated current, 4000W power rating) of the Maxcio Smart Outdoor Plug.

5. SETUP INSTRUCTIONS

5.1 What's in the Box

- Maxcio 2-in-1 Smart Outdoor Plug (Model EOP03)
- User Manual

5.2 App Installation

1. Download the 'Smart Life' app from the App Store (iOS) or Google Play Store (Android).
2. Register a new account or log in if you already have one.

5.3 Device Installation and Network Connection

1. Plug the Maxcio Smart Outdoor Plug into a standard EU-type wall socket.
2. Open the 'Smart Life' app.
3. Tap the '+' icon in the top right corner to add a device.
4. Select 'Electrical Outlet' or 'Smart Plug' from the device list.
5. Follow the in-app instructions to connect the plug to your 2.4 GHz Wi-Fi network. Ensure your phone is also connected to the 2.4 GHz network during setup.
6. Once connected, you can rename the plug and its individual outlets (S1 and S2) for easier identification.

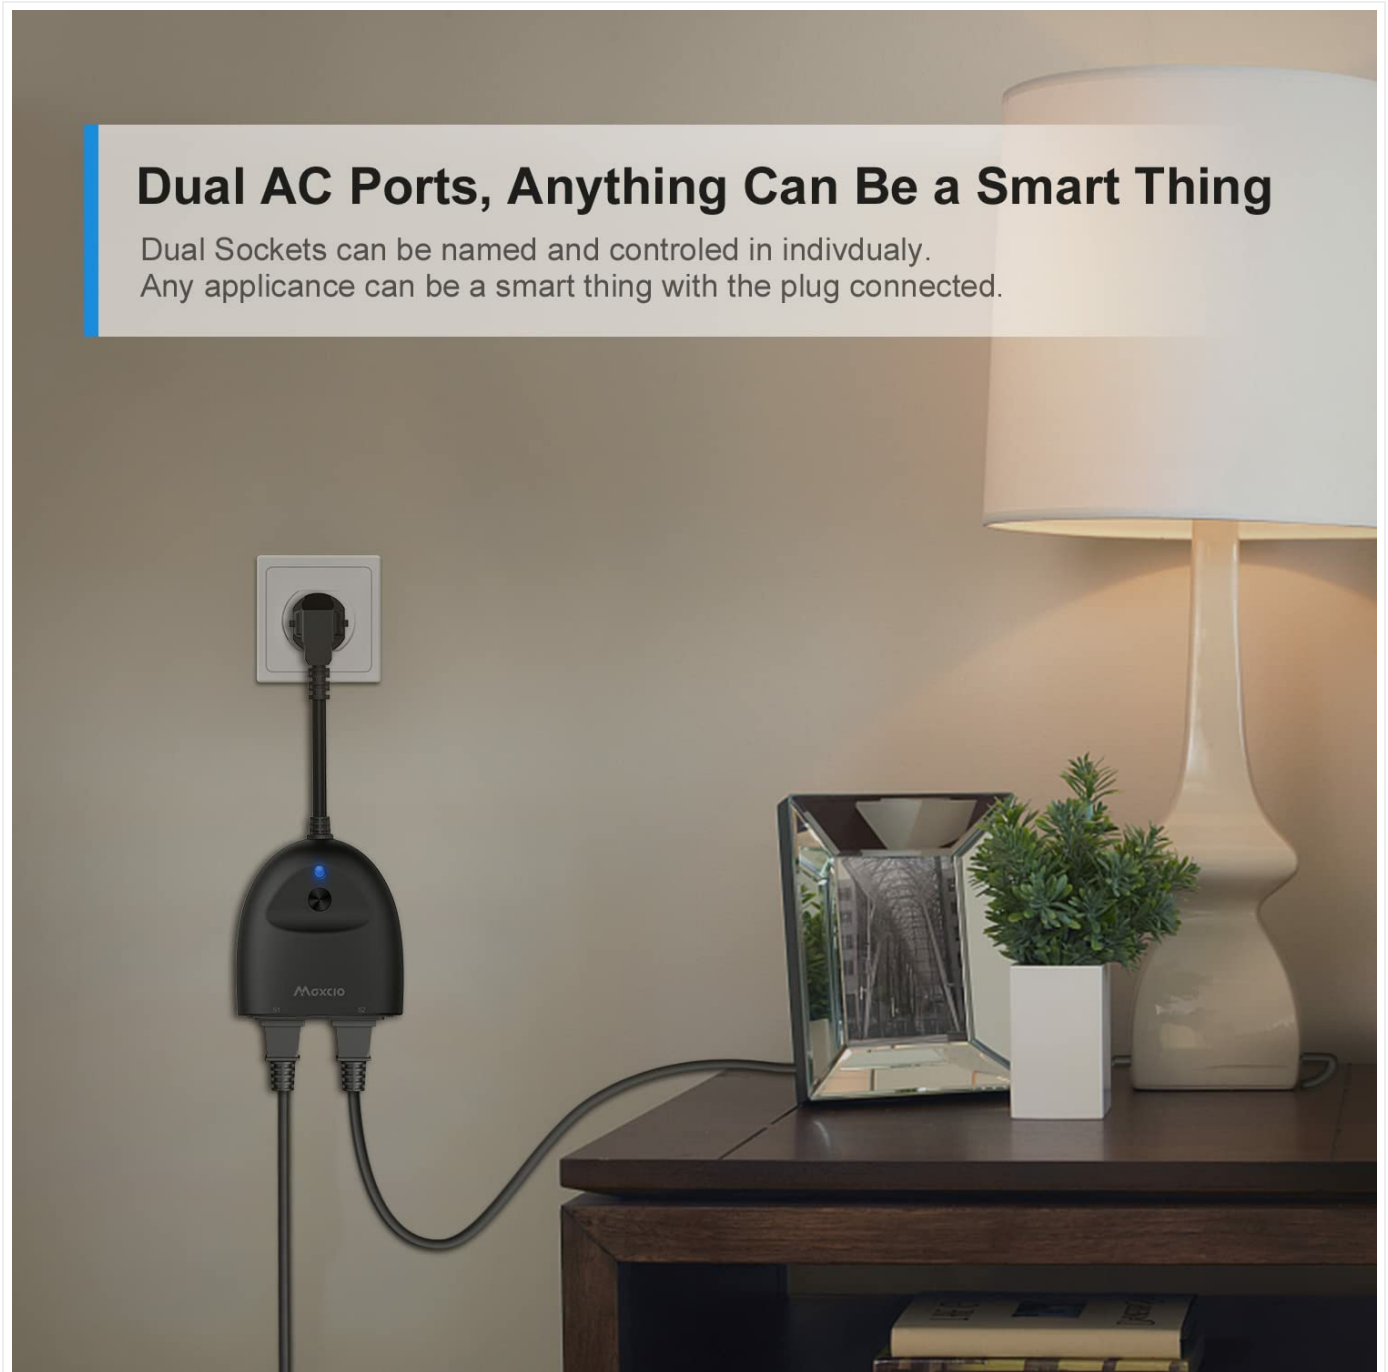


Image 5.1: The Maxcio Smart Outdoor Plug connected to an indoor wall socket, demonstrating its dual AC ports controlling a lamp. This illustrates how any appliance can become a smart device when connected.

5.4 Voice Assistant Integration (Alexa/Google Home)

1. In the 'Smart Life' app, navigate to the device settings and look for options to link with third-party services.
2. For Amazon Alexa: Open the Alexa app, go to 'Skills & Games', search for 'Maxcio' or 'Smart Life', and enable the skill. Link your Smart Life account.

3. For Google Home: Open the Google Home app, go to 'Set up device' > 'Works with Google', search for 'Smart Life', and link your account.
4. Once linked, discover devices in your Alexa or Google Home app. You can then control the plug and its individual outlets using voice commands (e.g., "Alexa, turn on S1").

6. OPERATING INSTRUCTIONS

6.1 Manual Control

Press the physical button on the plug to manually turn both outlets ON or OFF simultaneously. This button acts as a master switch for the entire device.

6.2 App Control (Individual Outlets)

Open the 'Smart Life' app and select your Maxcio Smart Outdoor Plug. You will see separate controls for Outlet S1 and Outlet S2. Tap on each to turn them ON or OFF independently.

6.3 Scheduling and Timer Functions

Within the 'Smart Life' app, for each individual outlet (S1 and S2), you can set up schedules or countdown timers:

- **Schedule:** Create custom ON/OFF times for specific days of the week. This is ideal for automating garden lights, irrigation systems, or holiday decorations.
- **Timer/Countdown:** Set a countdown for an outlet to turn ON or OFF after a specified duration.



Image 6.1: A collage illustrating various outdoor applications for the Maxcio Smart Outdoor Plug, including camping lights, garden lighting, irrigation systems, and holiday decorations.

7. MAINTENANCE

- Regularly inspect the plug and connected cables for any signs of damage or wear.
- Clean the device with a soft, dry cloth. Do not use harsh chemicals or abrasive cleaners.
- Ensure the protective covers for the outlets are closed when not in use to maintain IP44 rating.
- If the device is not going to be used for an extended period, unplug it from the power source.

8. TROUBLESHOOTING

- **Device not connecting to Wi-Fi:** Ensure your router is broadcasting a 2.4 GHz Wi-Fi signal. The plug does not support 5.0 GHz Wi-Fi. Move the plug closer to your router during setup.
- **App cannot find the device:** Make sure the plug is powered on and the indicator light is blinking (refer to app for specific

blinking patterns for pairing mode). Try resetting the plug by holding the physical button for 5-10 seconds until the indicator light blinks rapidly.

- **Voice control not working:** Verify that the 'Maxcio' or 'Smart Life' skill is enabled in your Alexa/Google Home app and your accounts are linked correctly. Ensure the device is discovered by your voice assistant.
- **Outlets not responding:** Check if the plug is receiving power. If using the physical button, remember it controls both outlets simultaneously. For individual control, use the app.
- **Unexpected power cycling:** If the plug turns off by itself, ensure it is not overloaded (exceeding 2000W total or 10A per outlet). Check for any conflicting schedules or timers set in the app.

9. WARRANTY AND SUPPORT

For any questions, technical assistance, or warranty claims, please contact Maxcio customer support. Refer to the contact information provided in the product packaging or on the official Maxcio website. Please have your model number (EOP03) and purchase details ready when contacting support.

