

RBROHANT JK0002**

RBROHANT Freestanding Outdoor Shower (Model JK0002**) - Instruction Manual

1. INTRODUCTION

The RBROHANT Freestanding Outdoor Shower, Model JK0002**, is designed for outdoor use in various settings such as backyards, gardens, poolsides, or beaches. Constructed from durable stainless steel, it offers excellent rust resistance for outdoor environments. This dual-function shower features a 10-inch overhead rain shower head and a handheld shower, providing versatility for different showering needs. The shower pipe is height-adjustable from approximately 175cm (5 3/4 feet) to 218cm (7 1/8 feet) and can rotate 360 degrees, accommodating various user heights and preferences.

2. SAFETY INFORMATION

- Always ensure proper water temperature to prevent scalding or discomfort. Test water temperature before use.
- **Winterization:** During freezing temperatures, it is crucial to completely drain the shower system to prevent water from freezing inside the pipes, which can cause severe damage. Disconnect water lines and allow all water to exit the system.
- Ensure the shower base is securely mounted to a stable, level surface to prevent tipping or instability during use.
- For installation, it is recommended to have basic plumbing knowledge or consult a professional plumber to ensure correct setup and prevent leaks or damage.
- Keep children supervised when near the outdoor shower.

3. PACKAGE CONTENTS

The RBROHANT Freestanding Outdoor Shower comes as a complete combo set. Please verify all components are present and undamaged before beginning installation.



Image: All components included in the RBROHANT Freestanding Outdoor Shower kit.

- Main Shower Pipe Assembly
- 10-inch Rain Shower Head
- Handheld Shower with Hose
- Mixing Valve and Diverter
- Base Plate and Cover
- Mounting Hardware (screws, anchors, Allen wrench)
- Hot and Cold Water Supply Lines (110cm)
- Sealing Gaskets and O-rings

4. SPECIFICATIONS

Feature	Specification
---------	---------------

Brand	RBROHANT
Model Number	JK0002**
Color	Matte Black
Material	Stainless Steel (main body), Zinc (handle)
Finish Type	Brushed
Number of Handles	2
Mounting Type	Floor Mount
Rain Shower Head Size	10 inches
Adjustable Height Range	175cm to 218cm (approx. 5 3/4 ft to 7 1/8 ft)
Product Dimensions	46.5 x 21.7 x 3.5 inches
Item Weight	18.31 pounds
Connection Thread Size	US Standard 1/2" NPT
UPC	768572298095



Image: Detailed dimensions of the shower unit.

5. SETUP AND INSTALLATION

This section provides general guidance for installing your RBROHANT Freestanding Outdoor Shower. Professional installation is recommended for optimal performance and safety.

5.1 Pre-Installation Checks

- Ensure you have access to both hot and cold water supply lines at the installation site.
- Confirm the mounting surface is stable and capable of supporting the shower unit.
- Unpack all components and verify against the package contents list.

5.2 Installation Steps

1. **Mount the Base:** Secure the base plate to your chosen stable surface using the provided mounting hardware. Ensure it is level.
2. **Assemble Main Pipe:** Carefully assemble the main shower pipe sections.

3. **Connect Water Lines:** Connect the 110cm supply lines to your hot and cold water sources. The connection thread size is US standard 1/2" NPT.
4. **Attach Shower Pipe to Base:** Attach the main shower pipe to the mounted base.
5. **Connect Supply Lines to Shower:** Connect the supply lines to the shower's mixing valve. **Important:** Do NOT fix the lines interface to the mixing valve first before fixing the main shower pipe to the base. This can cause the lines to twist excessively when screwing the shower pipe, potentially shortening their lifespan.
6. **Install Shower Head and Handheld:** Attach the 10-inch rain shower head and the handheld shower unit to their respective connections.
7. **Test for Leaks:** Turn on the water supply and carefully check all connections for leaks. Tighten any leaking connections as needed.

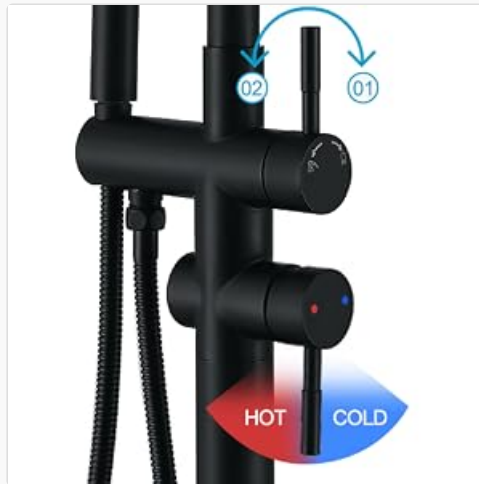


Image: Detail of the adjustable height mechanism.



Image: Adjustable shower height range.

6. OPERATING INSTRUCTIONS

The RBROHANT Freestanding Outdoor Shower offers intuitive controls for a customized showering experience.

6.1 Water Flow and Temperature Control

- Use the lower handle to control water flow and temperature. Rotate towards 'HOT' (red dot) for warmer water and 'COLD' (blue dot) for cooler water.

6.2 Function Diverter

- The upper handle acts as a diverter. Rotate it to switch between the 10-inch rain shower head and the handheld shower.

6.3 Height Adjustment

- To adjust the height of the rain shower head, loosen the locknut on the upper shower pipe. Slide the pipe up or down to the desired height, then tighten the locknut to secure it.

6.4 Rotatable Shower Pipe

- The upper shower pipe can be rotated 360 degrees, allowing you to position the rain shower head as needed for optimal coverage.

10 Inch High Pressure Rain Shower Head



Made from SUS304 stainless steel, adopts air-in technology, long lasting and high pressure.



Soft silicon nozzles, easy to clean, just rub it with your finger to remove the scale.

Image: Dual-function control handles for water temperature and shower selection.



Image: 360-degree rotatable shower pipe.

Your browser does not support the video tag.

Video: A short demonstration of the RBROHANT Freestanding Outdoor Shower in operation, showing water flow from the rain shower head.

7. MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your outdoor shower.

- **Cleaning Silicone Nozzles:** The 10-inch rain shower head features soft silicone nozzles. If mineral deposits or scale build up, simply rub them with your finger to remove the scale and maintain consistent water flow.
- **General Cleaning:** Clean the stainless steel surfaces with a soft cloth and mild soap or a non-abrasive cleaner designed for stainless steel. Avoid harsh chemicals or abrasive pads that could scratch the finish.
- **Winterization:** As mentioned in the safety section, it is critical to completely drain the shower system before the first freeze to prevent damage from expanding ice. Disconnect water supply lines and ensure all water is expelled from the shower pipe and head.

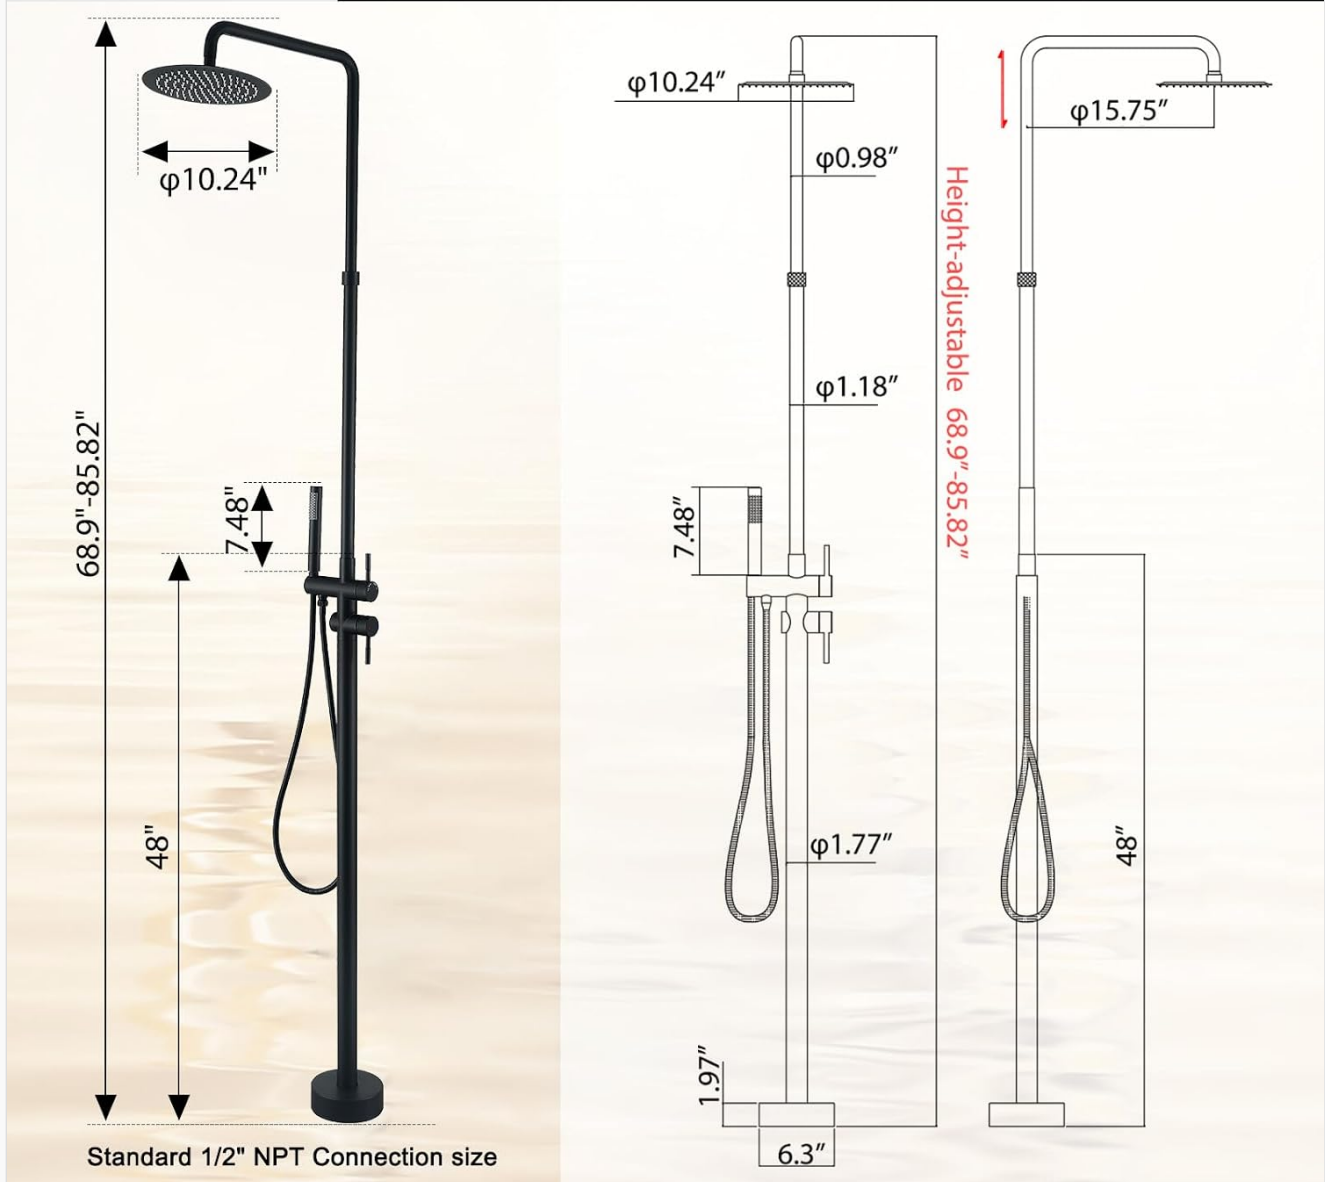


Image: Detail of the 10-inch rain shower head with easy-to-clean silicone nozzles.

8. TROUBLESHOOTING

If you encounter issues with your RBROHANT Freestanding Outdoor Shower, refer to the following common problems and solutions:

- **Low Water Pressure:**

- Check if water supply valves are fully open.
- Inspect the shower head nozzles for clogs and clean them as described in the Maintenance section.
- Verify that the water supply lines are not kinked or obstructed.

- **Leaks at Connections:**

- Ensure all connections are tightened properly. Do not overtighten.
- Check for damaged or improperly seated gaskets/O-rings. Replace if necessary.

- **Difficulty Adjusting Height or Rotation:**

- Ensure the locknut for height adjustment is sufficiently loosened before attempting to slide the pipe.
- Check for any debris or obstruction in the rotating mechanism.

- **No Hot or Cold Water:**

- Verify that both hot and cold water supply lines are connected and their respective valves are open.
- Ensure the mixing valve handle is correctly positioned for the desired temperature.

If these steps do not resolve the issue, please contact RBROHANT customer support for further assistance.

9. WARRANTY AND SUPPORT

RBROHANT is committed to providing high-quality products and excellent customer service.

9.1 Lifetime Warranty

RBROHANT offers a lifetime warranty for all of its shower fixtures. This warranty covers manufacturing defects and ensures the product's quality and durability.



Image: Lifetime Warranty icon.

9.2 Customer Support

Should you encounter any problems with your RBROHANT outdoor shower, please do not hesitate to contact our customer support team. We aim to respond to all inquiries within 24 hours and will provide free new replacement parts if necessary.

- **Free Replacement:** In case of defective parts, free replacements will be provided.
- **Parts Customization:** For specific needs, inquire about parts customization options.
- **Fast Response:** Expect a response from our support team within 12-24 hours.

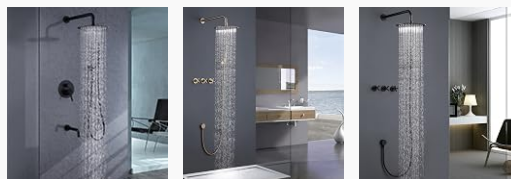


Image: Icons for Free Replacement, Parts Customization, and 12-Hour Fast Reply.

For more information or to contact support, please visit the official RBROHANT store or contact us through your purchase platform.

