



Manuals.plus /

› AUTOKAY /

› AUTOKAY Engine Splash Guard and Mounting Elements Instruction Manual for Audi A6/A7/RS7/S6/S7 (2011-2018)

AUTOKAY 4G0863822C

AUTOKAY Engine Splash Guard and Mounting Elements Instruction Manual

Model: 4G0863822C

1. INTRODUCTION

This manual provides detailed instructions for the installation and maintenance of the AUTOKAY Engine Splash Guard and its accompanying mounting elements. Please read this manual thoroughly before proceeding with installation to ensure proper fitment and function.

2. PRODUCT OVERVIEW

The engine splash guard is designed to protect the engine bay from road debris, water, and other contaminants. This kit includes the main splash guard panel and all necessary mounting hardware for a complete installation.

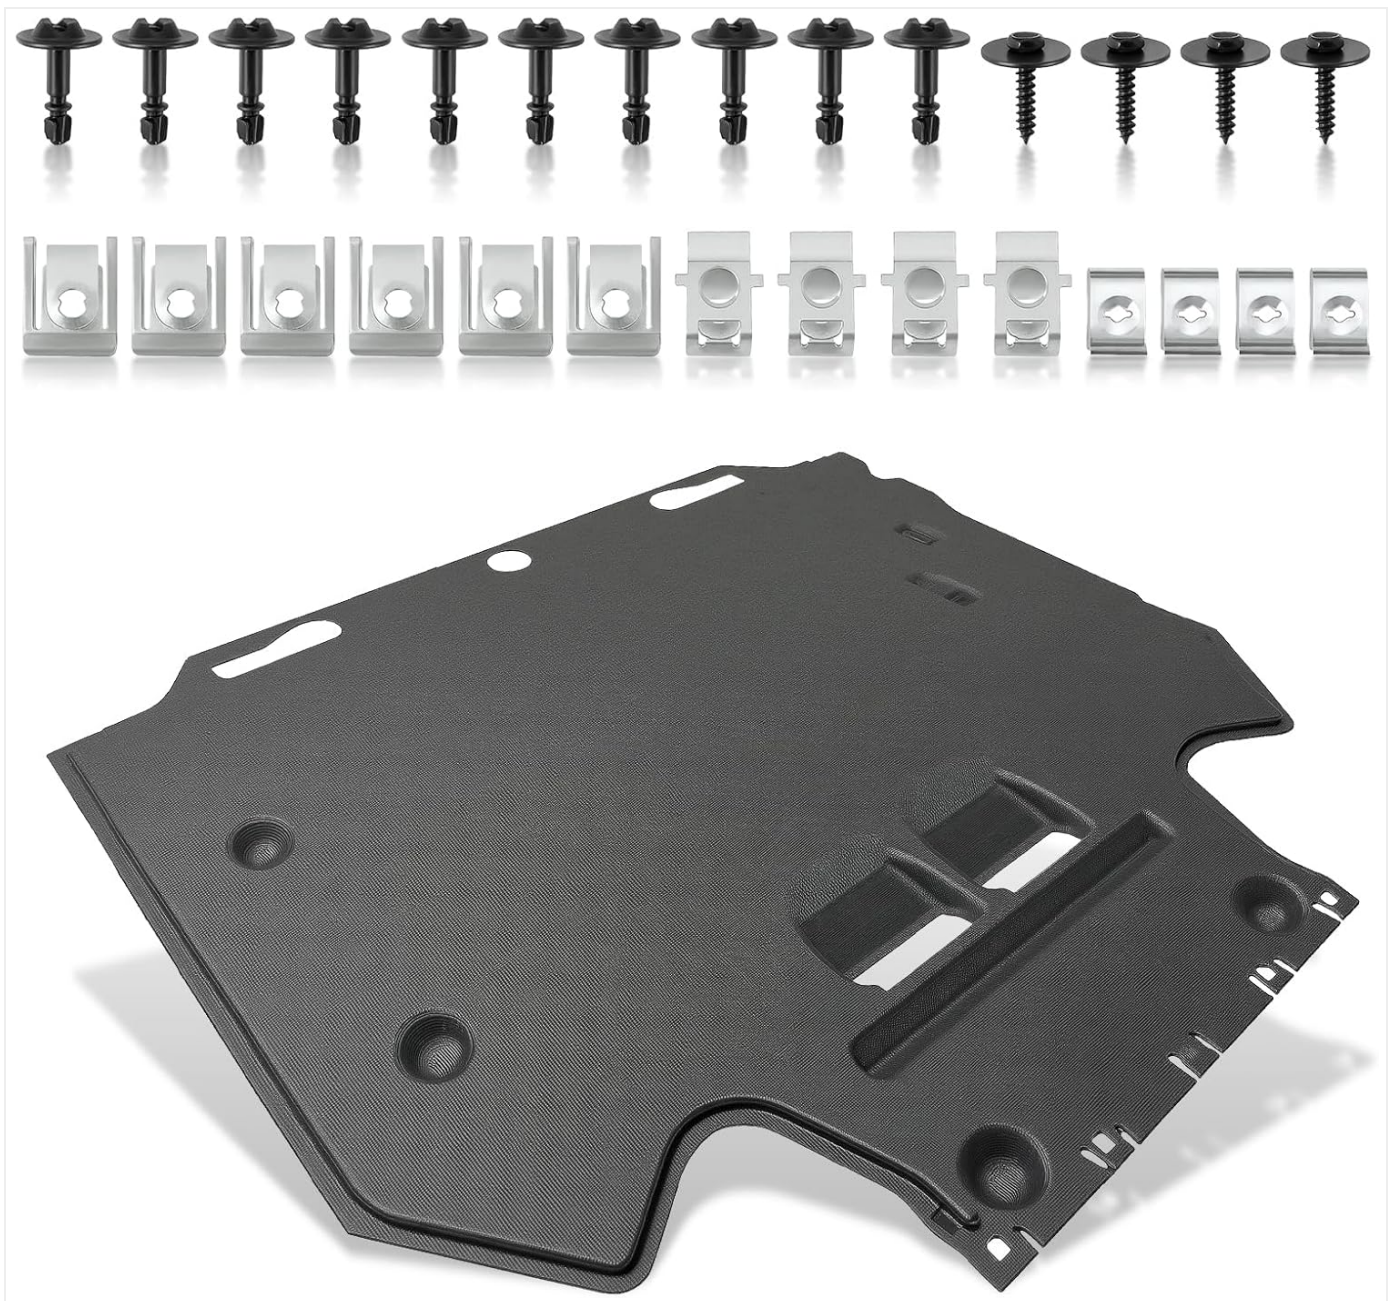


Figure 2.1: AUTOKAY Engine Splash Guard and complete mounting hardware kit.

3. COMPATIBILITY

This engine splash guard (Part Number: 4G0863822C, 4G0863822J) is compatible with the following Audi models:

- Audi A6 (4G C7) 2012-2018
- Audi A7 Quattro (4G) 2012-2018
- Audi RS7 2016-2018
- Audi S6 2013-2018
- Audi S7 2013-2018

Please verify the part number and visual appearance against your existing splash guard to ensure correct fitment before installation.

AUTOKAY

COMPATIBLE MODELS

FITS FOR AUDI

FOR AUDI A6 2012-2018

FOR AUDI A7 QUATTRO 2012-2018

FOR AUDI RS7 2016-2018

FOR AUDI S6 2013-2018

FOR AUDI S7 2013-2018

REPLACE PART NUMBER

4G0863822C

4G0863822J

4G0-863-822-C

4G0-863-822-J



Figure 3.1: Visual representation of compatible Audi models and corresponding part numbers.

4. PACKAGE CONTENTS

The package includes the following items:

- 1x Engine Splash Guard (Part Number: 4G0863822C / 4G0863822J)
- Assorted Mounting Elements (screws, clips, nuts)



Figure 4.1: Detailed view of the included mounting elements.

5. INSTALLATION INSTRUCTIONS

Installation of the engine splash guard requires basic automotive tools and mechanical knowledge. If you are unsure about any step, it is recommended to seek professional assistance.

5.1. Required Tools (Not Included)

- Socket Wrench Set
- Screwdriver Set (Phillips and Flathead)
- Vehicle Lift or Jack Stands
- Safety Glasses
- Gloves

5.2. Installation Steps

1. **Prepare Vehicle:** Park the vehicle on a level surface. Engage the parking brake. If using a lift or jack stands, ensure the vehicle is securely supported.
2. **Remove Old Splash Guard (if applicable):** Locate and remove all existing fasteners securing the old engine splash guard. Carefully lower and remove the old guard.
3. **Inspect Mounting Points:** Clean any debris from the mounting points on the vehicle's undercarriage. Ensure all surfaces are free from rust or damage.
4. **Position New Splash Guard:** Carefully align the new AUTOKAY Engine Splash Guard with the mounting points on the vehicle.
5. **Install Mounting Elements:** Begin by loosely attaching the splash guard using a few key fasteners to hold it in place. Refer to the provided image for typical fastener locations.

AUTOKAY

MULTI-VIEW DISPLAY



Figure 5.1: Various views of the splash guard highlighting mounting points.

Your browser does not support the video tag.

Video 5.1: Overview of the engine splash guard and its mounting elements, demonstrating the components included in the kit.

6. **Secure All Fasteners:** Once the splash guard is properly aligned, tighten all screws, clips, and nuts securely. Do not overtighten, as this may damage the fasteners or the splash guard.
7. **Final Check:** Ensure the splash guard is firmly attached and does not have any loose areas. Verify that there is no interference with other vehicle components.
8. **Lower Vehicle:** Carefully lower the vehicle from the lift or jack stands.

6. MAINTENANCE

Regular inspection of the engine splash guard is recommended to ensure its continued effectiveness.

- **Periodic Inspection:** Check the splash guard for cracks, damage, or loose fasteners during routine vehicle maintenance (e.g., oil changes).
- **Cleaning:** If excessive dirt or debris accumulates on the splash guard, clean it with water and a mild detergent.

- **Replacement:** If the splash guard becomes severely damaged, it should be replaced to maintain proper engine protection.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Splash guard does not fit correctly.	Incorrect part for vehicle model/year.	Verify vehicle compatibility and part numbers (4G0863822C, 4G0863822J).
Loose or rattling splash guard.	Fasteners are not tightened sufficiently or are missing.	Inspect all mounting points and tighten or replace any loose/missing fasteners.
Damage to splash guard.	Impact from road debris or improper installation.	Replace the damaged splash guard. Ensure proper installation to prevent future damage.

8. SPECIFICATIONS

- **Part Numbers:** 4G0863822C, 4G0863822J, 4G0-863-822-C, 4G0-863-822-J
- **Material:** Durable composite material
- **Finish Type:** Powder Coated
- **Auto Part Position:** Front, Rear
- **Item Weight:** Approximately 5.64 pounds
- **Package Dimensions:** Approximately 34 x 32 x 2 inches
- **Fit Type:** Vehicle Specific Fit

9. WARRANTY AND SUPPORT

For warranty information or technical support, please contact AUTOKAY customer service through the retailer where the product was purchased or visit the official AUTOKAY store page.

Visit the AUTOKAY Store on Amazon

