

Manuals.plus /

> ryuwanku /

> Ryuwanku Brushed Nickel Widespread Bathroom Faucet with Pull-Down Sprayer and Pop-up Drain (Model RY-20240129) - Instruction Manual

ryuwanku RY-20240129

Ryuwanku Brushed Nickel Widespread Bathroom Faucet with Pull-Down Sprayer and Pop-up Drain

Model: RY-20240129 | Brand: Ryuwanku

1. SAFETY INFORMATION

Please read all instructions carefully before installation and use. Failure to follow these instructions may result in property damage or personal injury.

- Always turn off the main water supply before beginning any plumbing work.
- Wear safety glasses during installation.
- If you are unsure about any part of the installation process, consult a qualified plumber.
- Ensure all connections are tight to prevent leaks, but do not overtighten.

2. PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Faucet Assembly with Pull-Down Sprayer
- Two Handles (Hot and Cold)
- Pop-up Drain Assembly
- Hot and Cold Water Supply Lines
- Mounting Hardware (washers, nuts, screws)
- Instruction Manual



Figure 1: All components of the Ryuwanku Brushed Nickel Widespread Bathroom Faucet, including the main faucet body with pull-down sprayer, two handles, and the pop-up drain assembly.

3. TOOLS REQUIRED (NOT INCLUDED)

- Adjustable Wrench
- Phillips Head Screwdriver
- Plumber's Putty or Silicone Sealant
- Tape Measure
- Safety Glasses

4. SPECIFICATIONS

Brand	Ryuwanku
Model Name	RY-20240129
Color	Brushed Nickel
Material	Stainless Steel
Mounting Type	Deck Mount

Number of Handles	2
Hole Count	3
Special Feature	Pull Down Sprayer
Product Dimensions	5.31"D x 8"W x 8.6"H
Hose Length	75 Centimeters
UPC	719910414561

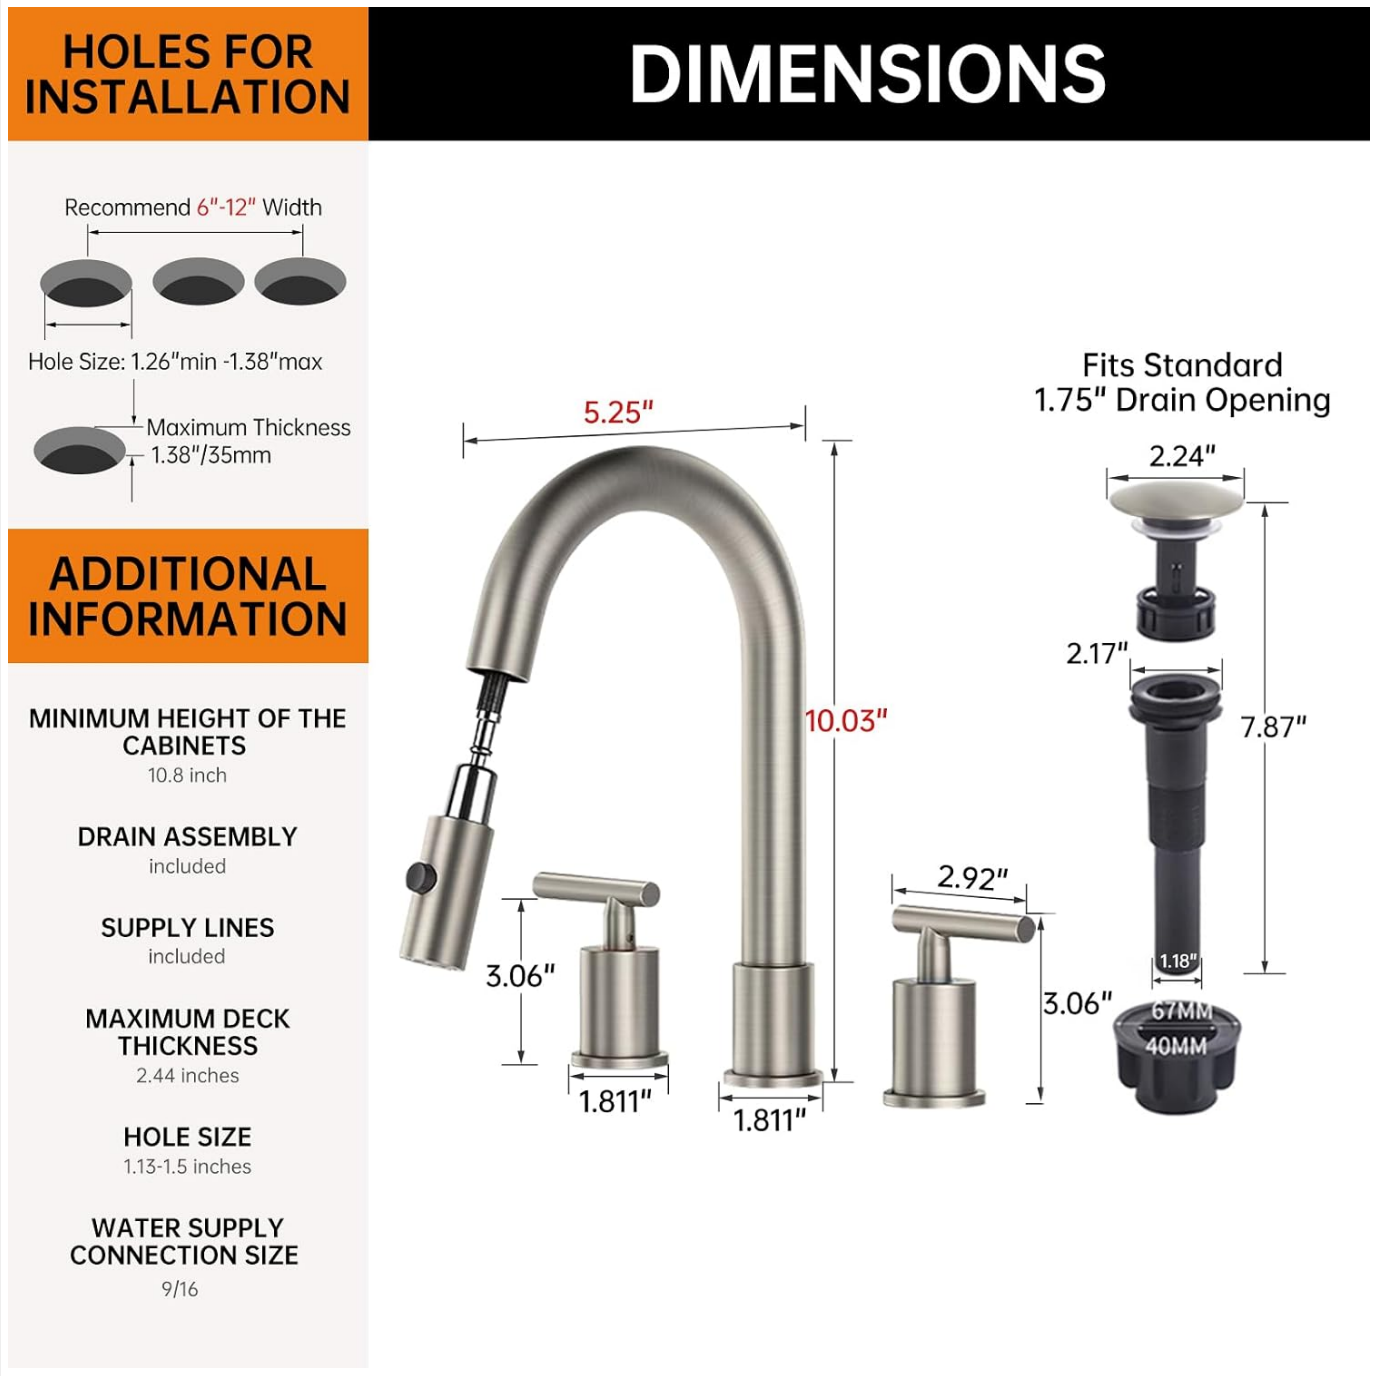


Figure 2: Detailed dimensions of the faucet and handles, along with recommended hole sizes and spacing for installation on a 3-hole widespread sink (6-12 inch width).

5. INSTALLATION INSTRUCTIONS

This faucet is designed for 3-hole widespread bathroom sinks, fitting widths from 6 to 12 inches. Refer to the detailed

diagram and video for visual guidance.

5.1. Prepare for Installation

1. Turn off the main water supply to the bathroom.
2. Clear the area under the sink for access.
3. Remove any existing faucet and clean the sink surface.

5.2. Install Faucet and Handles

4. Remove the mounting nut and washer from the faucet body and handles.
5. Insert the faucet body and handles through the corresponding holes in the sink deck. Ensure the hot handle is on the left and the cold handle is on the right.
6. From underneath the sink, secure the faucet and handles using the washers and mounting nuts. Tighten the screws on the mounting nuts with a screwdriver to ensure stability.

5.3. Connect Water Supply Lines

7. Connect the hot and cold water supply lines to the corresponding inlets on the faucet handles.
8. Utilize the quick-connect hose system to connect the sprayer hose to the main water supply line. Push until an audible click is heard, ensuring a secure connection.
9. Attach the gravity ball to the sprayer hose at the indicated position (typically 2 inches from the end of the hose) to ensure proper retraction of the pull-down sprayer.
10. Connect the hot and cold water supply lines from the handles to your home's hot and cold water valves. Use an adjustable wrench to tighten connections, but do not overtighten.

5.4. Install Pop-up Drain

11. Disassemble the pop-up drain. Apply plumber's putty or silicone sealant around the underside of the drain flange.
12. Insert the drain flange into the sink drain hole.
13. From underneath the sink, secure the drain body with the rubber washer and mounting nut. Tighten by hand, then use a wrench for a final snug fit.


5.5. Final Steps

14. Turn on the main water supply.
15. Check all connections for leaks. If leaks occur, tighten the connection slightly until the leak stops.
16. Run water through the faucet for a few minutes to flush out any debris.


THOUGHTFULLY DESIGNED FOR AN EASIER INSTALL

1 CONNECT TO WATER SUPPLIES LINES (2).


Turn the cold and hot water pipes clockwise to the sides of the handle (1).

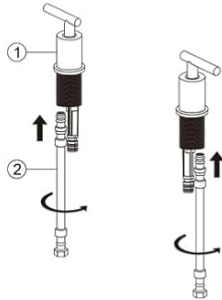

4 Push quick connects (1) firmly upward and snap onto tube fittings (2). Pull down moderately to ensure each connection has been made.

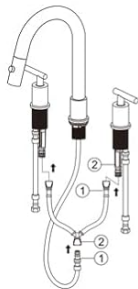


5 Attach weight ball (1) to hose assembly at least 21" from spout (2). Adjust weight ball (1) for easier hose return. Make sure water supply lines (3) do not interfere with spray hose assembly. Hose assembly should pull freely through spout tube.

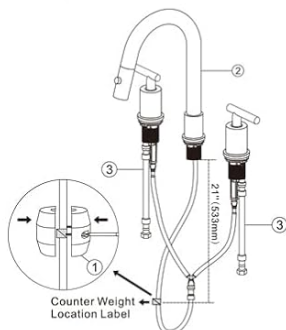


2 SHUT OFF WATER SUPPLIES.


Remove old faucet. Slide hot and cold end valves (1) with gaskets (2) through sink mounting holes. Note: If sink is uneven, use silicone under the gaskets. Make sure water lines (3) are installed away from spout. Valve with label for HOT WATER SIDE is installed on the left. Secure end valves with washers (4) and threaded brackets (5). Hand tighten brackets (5) onto shank (6). Use Phillips driver to lock brackets into position by tightening screw (7).

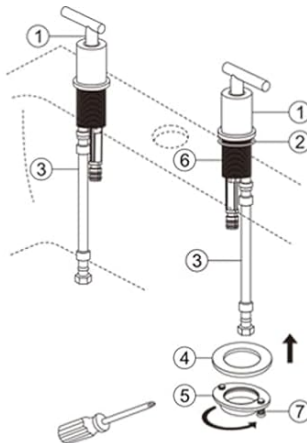

6 Connect the cold and hot water hoses (1) to the water supply angle valves (2). Note: The threads on the cold and hot water hoses (1) included in the package are 3/8 inch. If your water supply angle valve has a 1/2 inch thread, please use the adapter (3) provided.

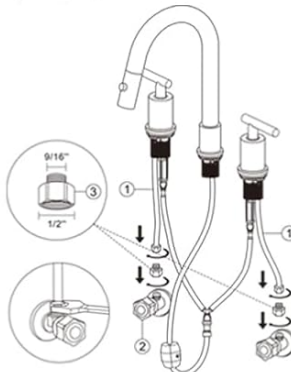

3 Place spout (1) with gasket (2) through mounting hole in sink. Note: If sink is uneven, use silicone under the gaskets. Secure end valves with washers (3) and threaded brackets (4). Hand tighten brackets (4) onto shank (6). Use Phillips driver to lock brackets into position by tightening screw (5).

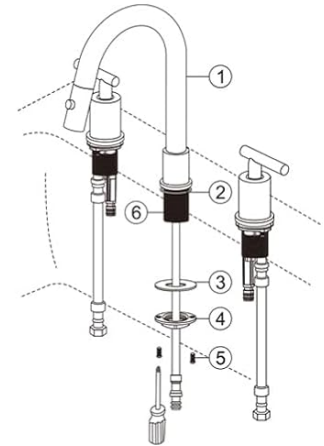

7 Install Pop-Up Assembly Remove head (1) and nut, washer, black seal (4) from body (2). Apply silicone sealant to underside of flange (3). Insert body (2) into sink.

8 Apply silicone grease to the inside diameter of the black seal (4) and threads on body (2) and assemble. Install nut (5) and hand tighten to the sink. Insert head into body (2).

9 Connect assembly to drain (1).

10

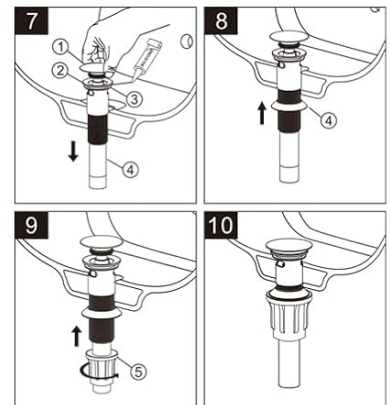


Figure 3: Comprehensive step-by-step installation diagram for the faucet, handles, and water connections.

A SIMPLIFIED INSTALLATION

QUICK-CONNECT SYSTEM

Wrench-free, quick-connect hose audibly clicks when water lines are connected properly

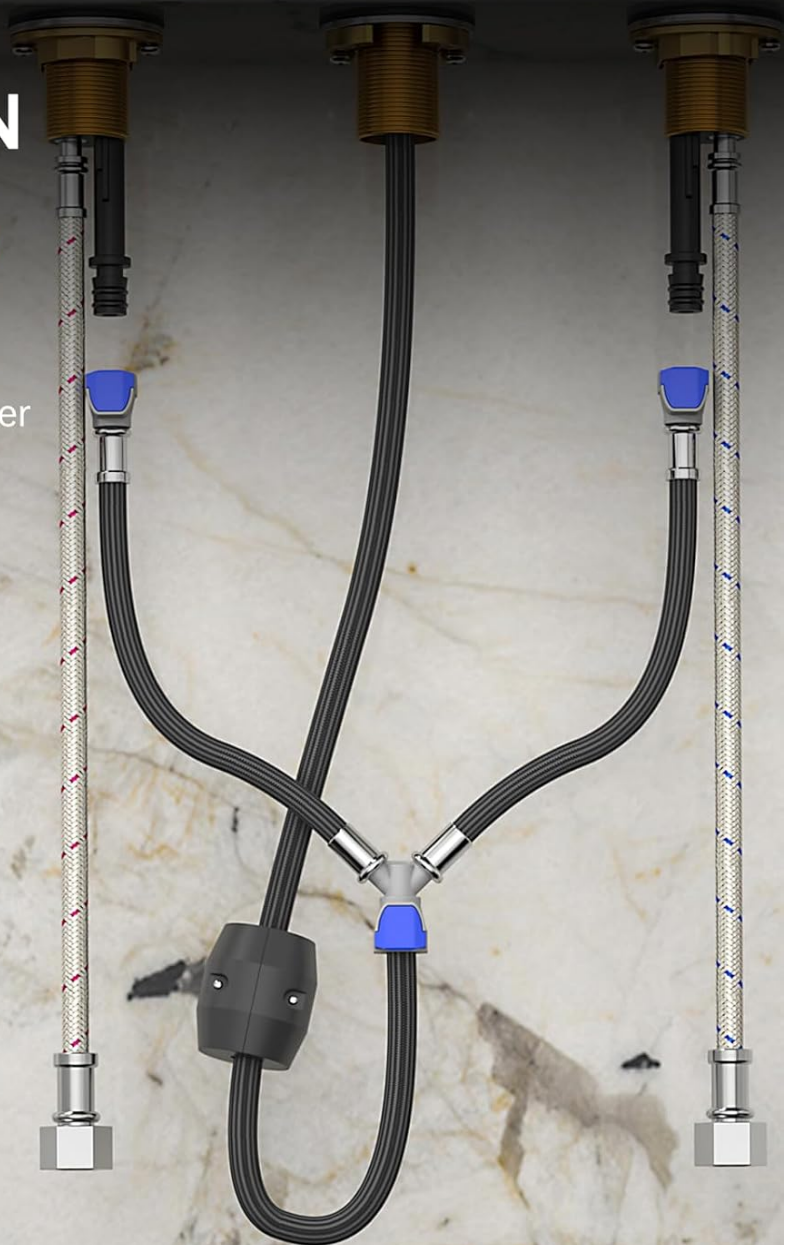


Figure 4: Illustration of the wrench-free quick-connect hose system for simplified installation.

Video 1: Official installation guide demonstrating the steps for setting up the pull-down bathroom faucet.

6. OPERATING INSTRUCTIONS

6.1. Water Flow and Temperature Control

- The left handle controls the hot water. Turn it counter-clockwise to increase hot water flow.
- The right handle controls the cold water. Turn it counter-clockwise to increase cold water flow.
- Adjust both handles to achieve the desired water temperature and flow rate.

6.2. Pull-Down Sprayer Functionality

- To use the pull-down sprayer, gently pull the sprayer head from the main faucet body. The hose will extend, allowing for greater reach.
- The sprayer head features a button to switch between two modes: **Stream** for regular water flow and **Spray** for a wider, more powerful rinse.

- After use, release the sprayer head, and the gravity ball will assist in retracting it back into the faucet body.



Figure 5: Demonstration of the pull-down sprayer in use, highlighting the stream and spray modes for versatile cleaning.

7. MAINTENANCE AND CARE

Proper care will ensure the longevity and appearance of your Ryuwanku faucet.

- **Cleaning the Finish:** The brushed nickel finish is designed to resist scratches and corrosion. Clean regularly with a soft, damp cloth and mild soap. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish.
- **Aerator Maintenance:** If water flow decreases, the aerator may be clogged. Unscrew the aerator from the sprayer head, clean any debris, and rinse thoroughly before reattaching.
- **Material Quality:** Made from SUS 304 stainless steel, this faucet is 100% lead-free, ensuring safe water usage.

HIGH PERFORMANCE FINISH

Resists water spots and fingerprints

WITH
CLEARSHIELD



WITHOUT
CLEARSHIELD



TESTED & CERTIFIED

All Ryuwanku products feature our advanced ClearShield surface treatment technology, engineered for durability and cleanliness. Each unit undergoes rigorous testing to ensure it passes a 48-hour salt spray test—guaranteeing no peeling, no fading, and a fingerprint-resistant finish.



CORROSION RESISTANCE



CHEMICAL RESISTANCE



FINISH ADHESION



WATER IMMERSION

Figure 6: Visual comparison demonstrating the high-performance ClearShield finish, which resists water spots and fingerprints.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Faucet leaks from connections	Loose connections or damaged washers.	Turn off water supply. Gently tighten connections with a wrench. Replace washers if damaged.
Low water flow	Clogged aerator or kinked supply lines.	Unscrew and clean the aerator. Check supply lines for kinks or obstructions.
Sprayer does not retract fully	Gravity ball improperly positioned or obstructed.	Ensure the gravity ball is correctly installed on the sprayer hose and has clear movement under the sink.

9. WARRANTY AND SUPPORT

Ryuwanku provides a lifetime warranty for this product, as stated in the specifications. Additionally, we offer a 100% satisfaction guarantee and replacement service within 12 months of purchase for any issues.

For any questions, concerns, or support needs, please contact Ryuwanku US customer service through your purchase platform or the official brand website.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0CTHWT596>

More documents and user manuals: <https://manuals.plus/>