Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Fuzion FZ-1000

Fuzion Digital Pocket Gram Scale FZ-1000 User Manual

Model: FZ-1000

1. Introduction

Thank you for choosing the Fuzion Digital Pocket Gram Scale FZ-1000. This compact and highly accurate scale is designed for a variety of weighing needs, from kitchen ingredients to jewelry and herbs. Please read this manual carefully before use to ensure optimal performance and longevity of your device.



The Fuzion Digital Pocket Gram Scale FZ-1000, featuring a stainless steel weighing platform and a clear blue backlit LCD display.

2. Setup

2.1 Battery Installation

The FZ-1000 scale requires 2 AAA batteries (included). To install:

1. Locate the battery compartment on the underside of the scale.
2. Slide open the battery cover.
3. Insert 2 AAA batteries, ensuring correct polarity (+/-).
4. Close the battery cover securely.

2.2 Initial Placement

For accurate readings, always place the scale on a horizontal, flat, and stable surface. Avoid placing it on uneven or vibrating surfaces.



The compact design of the FZ-1000 allows for easy portability, fitting conveniently into a pocket or bag.


3. Operating Instructions

3.1 Turning On/Off

Press the **ON/OFF** key to turn the scale on or off. The blue backlit LCD display will illuminate upon activation.

3.2 Unit Selection

To switch between the available weighing units (g, oz, gn, ct, dwt, ozt), press the **MODE** key repeatedly until your desired unit is displayed.

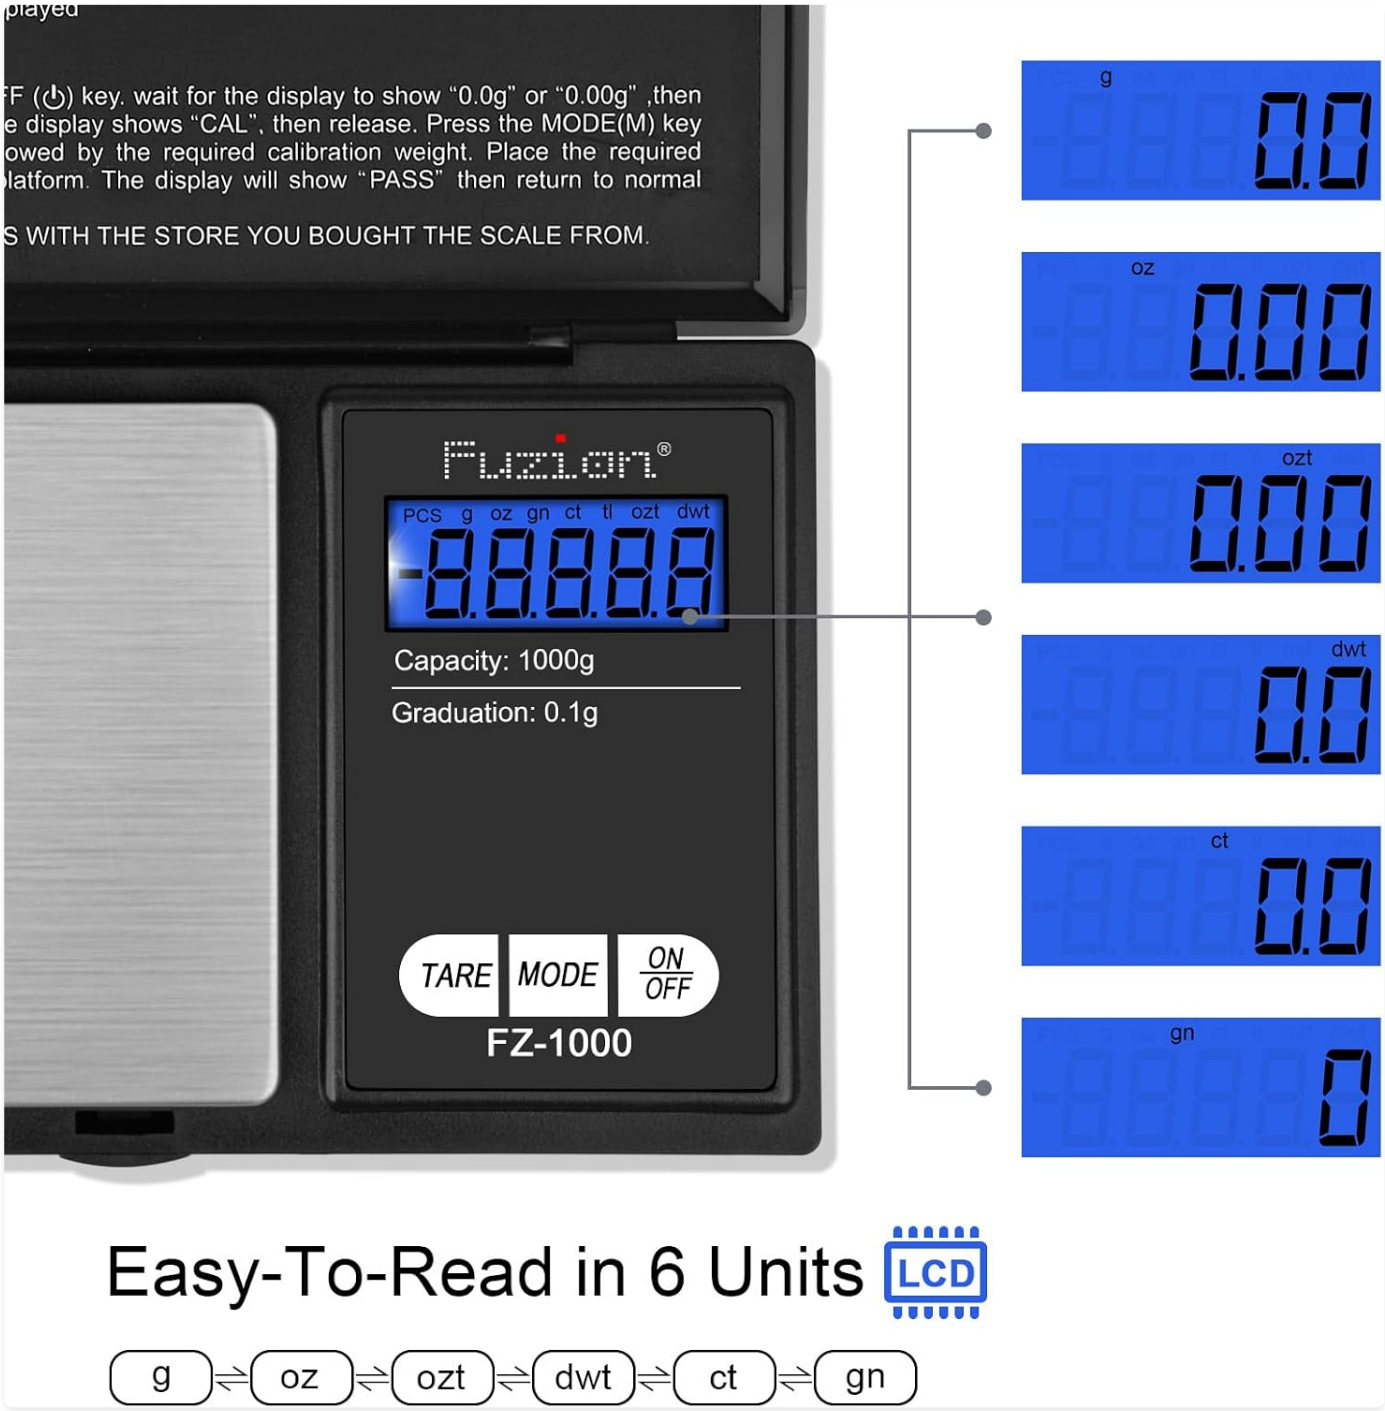


The scale offers easy-to-read measurements in 6 different units, displayed clearly on the LCD.

3.3 Tare Function

The tare function allows you to subtract the weight of a container, providing only the net weight of the contents. Follow these steps:

1. Turn on the scale.
2. Place an empty container on the weighing platform.
3. Press the **TARE** key. The display will show "0.0" or "0.00" and the tare indicator will appear.
4. Add items into the container. The display will now show the actual weight of the contents.

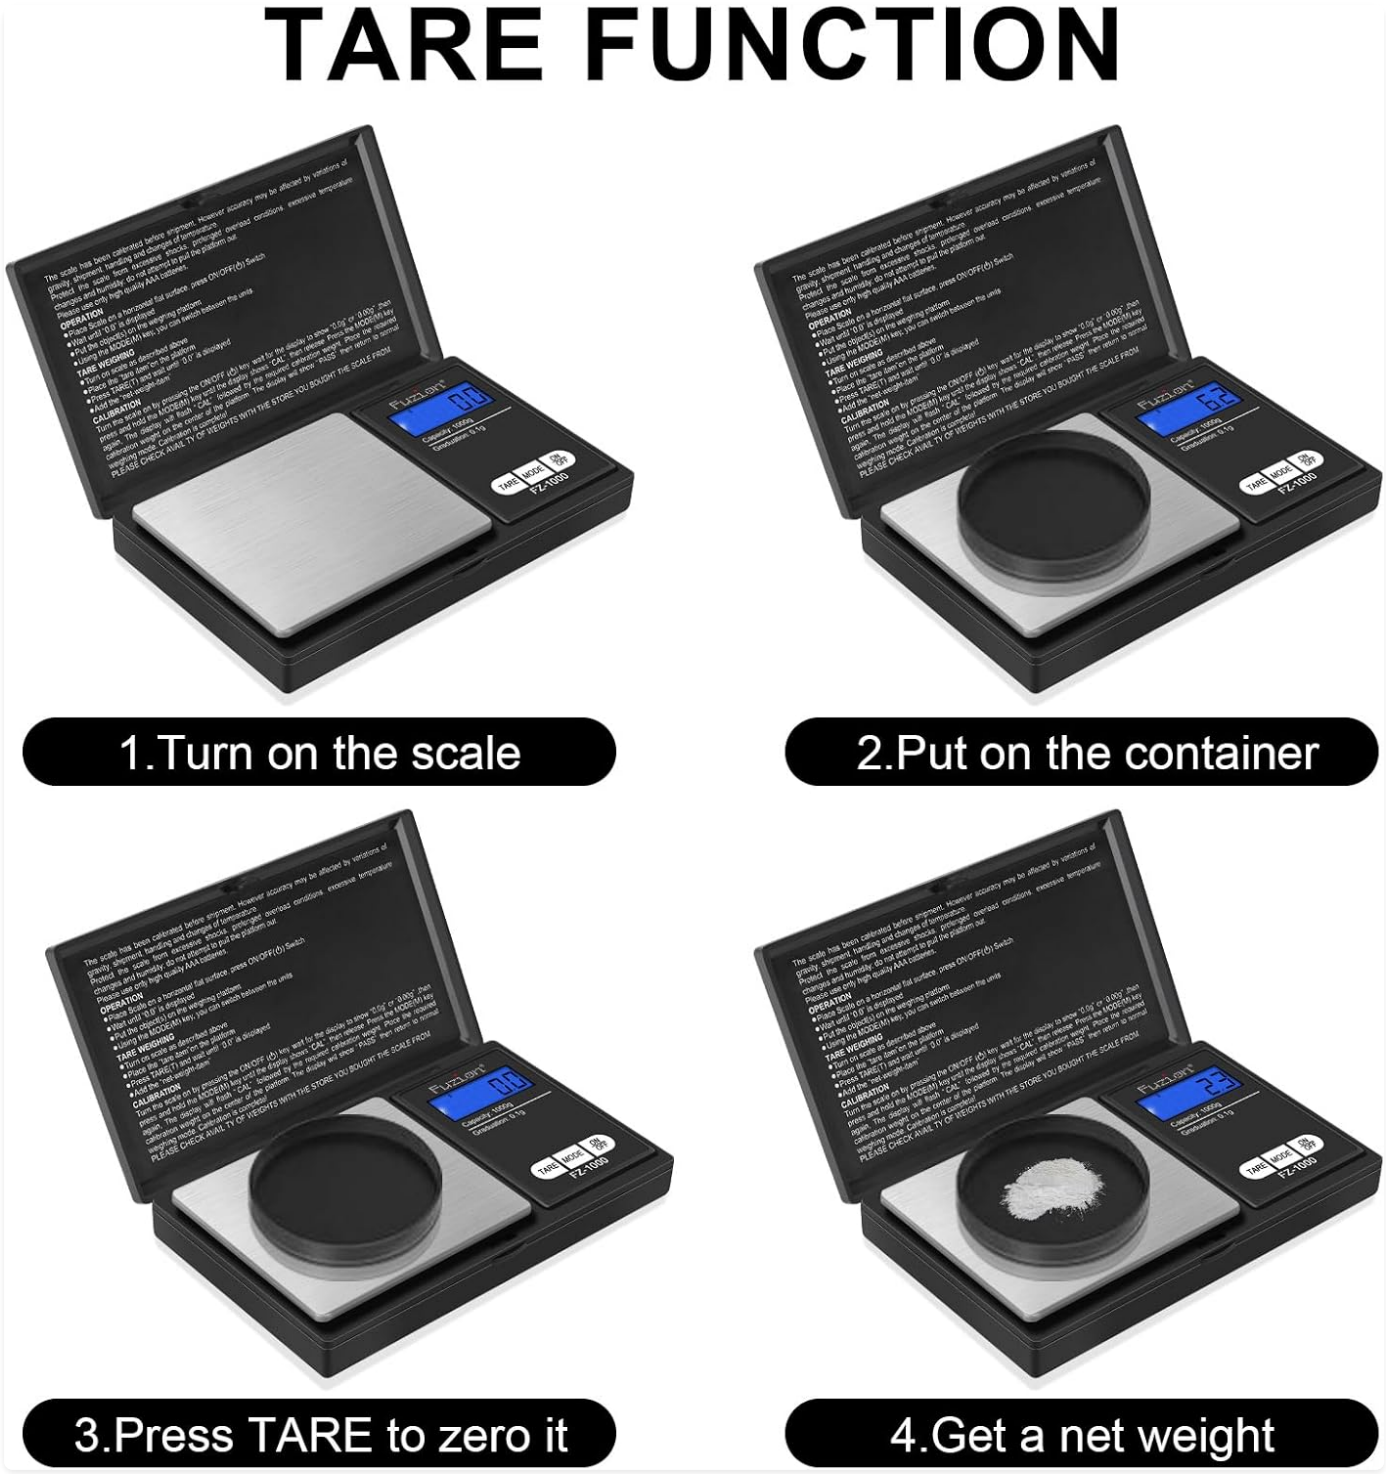

Visual guide for using the Tare function: 1. Turn on scale, 2. Place container, 3. Press TARE to zero, 4. Get net weight.

3.4 Calibration

The scale has been calibrated before shipment. However, accuracy may be affected by variations in gravity, shipment, handling, and temperature changes. If recalibration is needed, follow these steps:

1. Turn on the scale. Wait until "0.0" or "0.00" is displayed.
2. Press and hold the **MODE** key until the display shows "CAL", then release the button.
3. Press the **MODE** key again and then the required calibration weight (e.g., 1000g) will flash on the display.
4. Place the required weight onto the center of the platform. The display will show "PASS" when the calibration is complete.

Please check the availability of weights with the store you bought the scale from.

3.5 Automatic Shut-off

To conserve battery life, the scale features a 3-minute auto-off function. If left idle for 3 minutes, the scale will automatically turn off.

4. Maintenance

4.1 Cleaning

Wipe the scale with a slightly damp cloth. Do not immerse the scale in water or use abrasive cleaners, as this may damage the internal components.

4.2 Storage

When not in use, store the scale in a dry, cool place. Protect it from excessive shocks, vibrations, overload conditions, and extreme temperature changes or humidity. The protective lid helps safeguard the weighing platform.



The scale's protective cover ensures durability and portability.

5. Troubleshooting

- **"Lo" or Low Battery Indicator:** Replace the 2 AAA batteries.
- **"O-Ld" or Overload Indicator:** The weight on the platform exceeds the maximum capacity (1000g). Remove excess weight immediately to avoid damage.
- **Unstable Readings:** Ensure the scale is on a horizontal, stable surface. Avoid vibrations, drafts, or sudden

temperature changes.

- **Inaccurate Readings:** Recalibrate the scale as per Section 3.4. Ensure you are using high-quality AAA batteries.

6. Specifications

Feature	Description
Brand	Fuzion
Model	FZ-1000
Weight Limit	1000 Grams
Readout Accuracy	0.1 Grams
Display Type	LCD (Blue Backlit)
Weighing Units	g, oz, gn, ct, dwt, ozt
Material	Stainless Steel, Acrylonitrile Butadiene Styrene
Power Source	2 AAA batteries (required)
Product Dimensions	1.18 x 0.31 x 1.98 inches
Item Weight	4 ounces



Premium features include a durable stainless steel platform, a clear backlit display, and user-friendly buttons.

7. Warranty and Support

Fuzion offers a **Two Years Warranty** and **Lifetime Support** for the FZ-1000 Digital Pocket Gram Scale. For any questions or concerns, please contact the Fuzion support team for full-day service.
For additional information and resources, you may refer to the officialUser Guide (PDF).

8. Product Use Cases

The Fuzion FZ-1000 is versatile and can be used for various applications:

- **Kitchen & Food:** Precisely measure ingredients for cooking, baking, or portion control.
- **Jewelry:** Accurately weigh precious metals, gemstones, and small jewelry components.
- **Herbs & Powders:** Ideal for measuring small quantities of herbs, spices, or powdered supplements.
- **Coins & Collectibles:** Useful for weighing coins or other small collectibles where precise measurements are needed.



The FZ-1000 is suitable for a wide range of applications, from culinary use to weighing small collectibles.

9. Official Product Videos

There are currently no official product videos from the seller available for embedding in this manual.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B07L92G6CF

More documents and user manuals: **https://manuals.plus/**