

Behringer NX4-6000

Behringer NX4-6000 Power Amplifier User Manual

Model: NX4-6000

INTRODUCTION

Thank you for choosing the Behringer NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier. This manual provides essential information for the safe and efficient operation of your new amplifier. Please read this manual thoroughly before operating the device to ensure proper usage and to maximize its lifespan. Keep this manual for future reference.

The NX4-6000 is designed for professional audio applications, offering high power output in a compact and lightweight form factor. Its Class-D technology ensures high efficiency and cool operation, while the Smart Sense Loudspeaker Impedance Compensation provides reliable performance with various speaker loads.

IMPORTANT SAFETY INSTRUCTIONS

Always follow these basic safety precautions when using electrical equipment:

- Read these instructions.
- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- Do not use this apparatus near water.
- Clean only with a dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.

- Only use attachments/accessories specified by the manufacturer.
- Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

PRODUCT OVERVIEW

The Behringer NX4-6000 is a powerful 4-channel amplifier designed for demanding audio environments. Its front panel features intuitive controls and indicators for each channel, while the rear panel provides comprehensive connectivity options.



Figure 1: Front view of the Behringer NX4-6000 Power Amplifier. This image displays the amplifier's front panel, featuring four distinct channels, each equipped with signal and protect/limit indicators. Below these indicators are individual gain control knobs for each channel (CH A, CH B, CH C, CH D). A prominent power button is located on the right side. The unit is presented in a sleek black finish, designed for rack-mounting, with ventilation grilles on both sides of the front panel.

Front Panel Features:

- **Channel Gain Controls:** Individual rotary knobs for adjusting the input level of each of the four channels (CH A, CH B, CH C, CH D).
- **Signal Indicators:** LED indicators for each channel that illuminate when an audio signal is present.
- **Protect/Limit Indicators:** LEDs that indicate when the amplifier is in protect mode (due to overload or fault) or when the signal is clipping (limiting).
- **Power Button:** Main switch to turn the amplifier on or off.
- **Ventilation Grilles:** Designed for optimal airflow to keep the unit cool during operation.

Rear Panel Features (General):

- **Input Connectors:** Typically XLR and/or 1/4" TRS for balanced audio input.
- **Output Connectors:** Speakon connectors for connecting to loudspeakers.
- **Power Inlet:** IEC connector for the AC power cord.
- **Cooling Fans:** For thermal management.
- **Mode Switches:** (e.g., Stereo, Mono, Bridge) and Crossover settings (if applicable).

SETUP

Unpacking and Inspection:

1. Carefully unpack the amplifier and retain the packaging materials for future transport or storage.
2. Inspect the unit for any signs of damage that may have occurred during transit. If damage is found, contact your dealer immediately.

Placement and Ventilation:

- Ensure adequate ventilation around the amplifier. Do not block the ventilation openings.
- For rack-mounting, ensure proper airflow within the rack. Avoid placing the amplifier directly above heat-generating equipment.
- Place the amplifier on a stable, level surface if not rack-mounting.

Connections:

Before making any connections, ensure the amplifier is turned off and unplugged from the power outlet.

1. **Input Connections:** Connect your audio source (mixer, preamplifier, etc.) to the input connectors on the rear panel using high-quality balanced XLR or 1/4" TRS cables. Ensure correct channel assignment (e.g., Left to CH A, Right to CH B).
2. **Output Connections:** Connect your loudspeakers to the Speakon output connectors. Ensure the correct impedance matching between the amplifier and your speakers. Refer to the amplifier's specifications and your speaker's specifications for compatible impedance ranges. The NX4-6000 features Smart Sense Loudspeaker Impedance Compensation for optimized performance.
3. **Power Connection:** Connect the supplied AC power cord to the power inlet on the rear panel and then to a grounded electrical outlet. Ensure the power supply voltage matches the amplifier's requirements (100V as per specifications).

Note: Always use appropriate cables for audio signals and speaker connections to prevent signal loss or damage.

OPERATING INSTRUCTIONS

Powering On/Off:

1. Ensure all gain controls on the front panel are set to their minimum position (fully counter-clockwise) before powering on.
2. Press the Power button on the front panel to turn the amplifier on. The Power LED will illuminate.
3. When powering off, first reduce all gain controls to minimum, then press the Power button.

Adjusting Gain:

- Start with the gain controls at their minimum.
- Play audio through your source at a moderate level.
- Slowly increase the gain control for each channel until the desired volume is achieved.
- Monitor the Signal and Protect/Limit LEDs. The Signal LED should flicker with audio presence. If the Protect/Limit LED illuminates frequently or stays on, reduce the gain to prevent clipping and potential

damage to speakers or the amplifier.

Operating Modes (Refer to Rear Panel):

The NX4-6000 may feature switches on the rear panel to select different operating modes:

- **Stereo Mode:** Each channel operates independently, receiving its own input signal and driving its own speaker.
- **Mono Mode:** Combines input signals to a single mono output, typically used for driving multiple speakers with the same signal.
- **Bridge Mode:** Combines two channels into a single, more powerful mono output, typically used for driving a single, high-power subwoofer. Consult the manual for specific bridging instructions and minimum impedance requirements.

Caution: Incorrect impedance matching in Bridge mode can severely damage the amplifier and speakers. Always verify speaker impedance before operating in Bridge mode.

MAINTENANCE

Cleaning:

- Always disconnect the amplifier from the power supply before cleaning.
- Use a soft, dry cloth to clean the exterior surfaces.
- Do not use abrasive cleaners, solvents, or waxes.
- Periodically clean the ventilation grilles to ensure proper airflow and prevent dust buildup. A soft brush or vacuum cleaner with a brush attachment can be used.

Storage:

- If storing the amplifier for an extended period, ensure it is clean and dry.
- Store it in a cool, dry place, away from direct sunlight and extreme temperatures.
- It is recommended to store the amplifier in its original packaging to protect it from dust and physical damage.

TROUBLESHOOTING

Problem	Possible Cause	Solution
No power / Unit does not turn on.	Power cord not connected; Power outlet faulty; Internal fuse blown.	Check power cord connection; Try a different outlet; Contact qualified service personnel.
No sound output.	Input cables disconnected/faulty; Speaker cables disconnected/faulty; Gain controls set too low; Amplifier in protect mode.	Check all cable connections; Increase gain slowly; Check Protect/Limit LED – if lit, power cycle the unit and check speaker impedance.

Problem	Possible Cause	Solution
Distorted sound / Clipping.	Input signal too high; Gain set too high; Speaker impedance mismatch.	Reduce input signal level from source; Reduce amplifier gain; Verify speaker impedance matches amplifier specifications.
Amplifier overheats.	Blocked ventilation; Excessive load/continuous high output.	Ensure ventilation openings are clear; Reduce output level or provide additional cooling.
Protect/Limit LED constantly on.	Overload, short circuit, or thermal issue; Speaker impedance too low.	Turn off amplifier, disconnect speakers, wait a few minutes, then reconnect and power on. If issue persists, check speaker impedance and cables for shorts. Contact service if problem continues.

If the problem persists after attempting these solutions, please contact qualified service personnel or Behringer customer support.

SPECIFICATIONS

Feature	Detail
Model	NX4-6000
Brand	Behringer
Type	Ultra-Lightweight 4-Channel Class-D Power Amplifier
Output Wattage	6000 Watts (Peak), 6400 Watts (as per some specifications)
Channels	4
Technology	Class-D with Smart Sense Loudspeaker Impedance Compensation
Product Dimensions	48.31 x 31.6 x 9.4 cm (approx. 19 x 12.4 x 3.7 inches)
Item Weight	6.1 kg (approx. 13.45 lbs)
Colour	Black
Power Source	Corded Electric
Voltage	100V (as per specifications)
Compatible Devices	Smartphone, Tablet, MP3 Player, Desktop, Television, Projector, Laptop
Connector Type	RCA, Speakon (Inputs typically XLR/TRS, Speakon for outputs)
Manufacturer	Intellimix MG CA

Feature	Detail
Date First Available	Nov. 11 2018

WARRANTY AND SUPPORT

Behringer products are designed and manufactured to the highest quality standards. For detailed warranty information, please refer to the warranty card included with your product or visit the official Behringer website. Warranty terms may vary by region.


For technical support, service, or spare parts, please contact your authorized Behringer dealer or visit the support section of the Behringer website. When contacting support, please have your product model number (NX4-6000) and serial number ready.

Online Resources:

- [Behringer Official Website](#)
- [Behringer Support Page](#)

© 2023 Behringer. All rights reserved. Information in this manual is subject to change without notice.

Documents - Behringer – NX4-6000

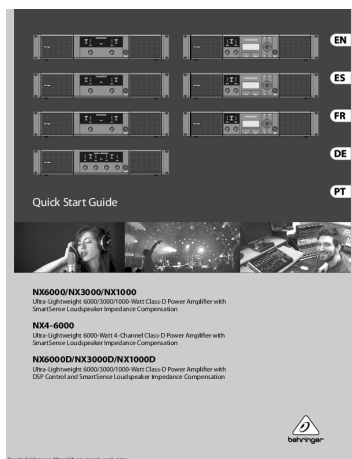


[\[pdf\]](#) Quick Start Guide Instructions Guide

ManualsLib Makes it easy to find manuals online! Search through 700 000 online and instruction user service guides owners installation Provided By MANUALSLIB COM manualslib Pult ruDDM4000 MAIN A 2 pole B B1520 PRO B1800X HPX6000 XM8500 NX4 6000 Downloaded from Manualslib manuals c545b279906dc052a50913783b54e86bpult ru upload iblock c54 c545b279906dc052a50913783b54e86b |||

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation
NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation
NX6000D/NX3000D/NX1000D Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with DSP Control and SmartSense Loudspeaker Impedance Compensation
 UI...

lang:en score:49 filesize: 5.96 M page_count: 23 document date: 2018-10-31

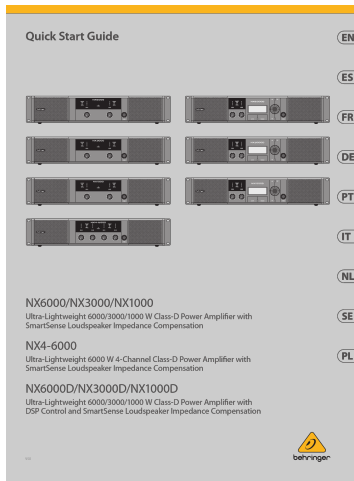

[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide

Quick Start Guide NX6000 NX3000 NX1000 NX4 6000 29 sept 2023 — This symbol wherever it appears alerts you to important operating and maintenance instructions in the accompanying literature Please read manual Caution QSG BE 0105 AAZ NX SERIES WW mediadl musictribe media PLM data docs Series |||

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000 W Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000 W 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D Ultra-Li...

lang:en score:48 filesize: 45.55 M page_count: 31 document date: 2023-01-10




[\[pdf\]](#) Quick Start Guide Instructions Guide

FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona 248 7016

Behringer NX4 6000 Quick Start Guide parts express pedocs manuals

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI...

lang:en score:46 filesize: 6.64 M page_count: 23 document date: 2020-02-07

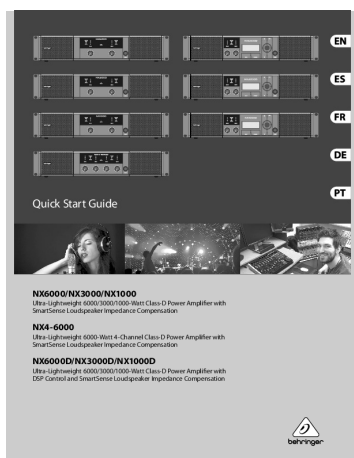


[\[pdf\]](#) Quick Start Guide Instructions Guide

ManualsLib Makes it easy to find manuals online! Search through 700 000 online and instruction user service guides owners installation Provided By MANUALSLIB COM manualslib

4dcea7c7a0b8fd19db378f8a18ddb18 kurgan pult ru upload iblock 4dc |||

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI...

lang:en score:46 filesize: 5.96 M page_count: 23 document date: 2018-10-31

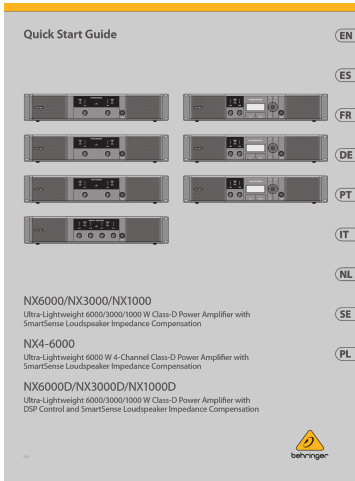


[\[pdf\]](#) Quick Start Guide Instructions Specifications Guide

Behringer NX3000D Guide sounddd shop Specification BEHRINGER |||

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000 W Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation
NX4-6000 Ultra-Lightweight 6000 W 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D Ultra-Li...

lang:en score:40 filesize: 12.09 M page_count: 19 document date: 2024-07-18

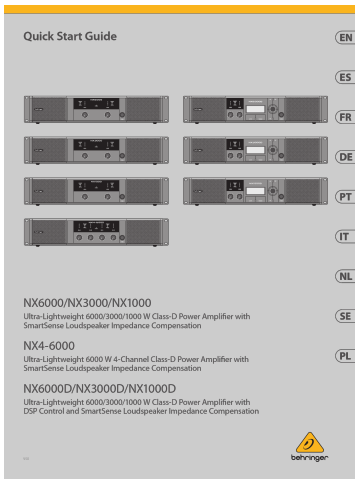

[\[pdf\]](#) Quick Start Guide Instructions Specifications Guide

Quick Start Guide NX6000 NX3000 NX1000 NX4 6000 NX6000DDDM4000 MAIN A 2 pole B B1520 PRO B1800X HPX6000 XM8500 PT Passo 1 Conexões IT Behringer NX3000D Guidesounddd shop Specification BEHRINGER Behringer srsItd AfmBOoqbEF5v9Zyv999SICyvXpkw 4UXsJeRjFBGTquB4Pk6OOrTS7j |||

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000 W Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation
NX4-6000 Ultra-Lightweight 6000 W 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D Ultra-Li...

lang:en score:40 filesize: 12.09 M page_count: 19 document date: 2024-07-18



[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide

FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona Manual Behringer NX4 6000 Etapa Potencia BEHRINGER Manual behringer serie nx etapas madridhifi crm documents produit 3 6 10143263 photos 1 |||

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation
NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI...

lang:en score:38 filesize: 6.34 M page_count: 23 document date: 2018-09-24



[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide

FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona Behringer Nx4

6000 Manual Pdf NX4 248 7014 NX6000 parts express pedocs manuals |||

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation

NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI...

lang:en score:38 filesize: 6.64 M page_count: 23 document date: 2020-02-07



[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide

FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona 248 7017

Behringer NX6000D Manual Parts ExpressTerminals marked with this symbol carry electrical current of

sufficient magnitude to constitute risk electric shock Use only high quality professional parts express

pedocs manuals srsltid AfmBOooiGWfyY FA7E3O75fU4gNIYUYnF2xGqH4VQrDNn2Selb81AHmG

Express248 professional Terminals FA7E3O75fU4gNIYUYnF2xGqH4VQrDNn2Selb81AHmGparts

AfmBOorHFHYIVs3zzRCaWE9 oTzVZIG1aGltan0rOgulRTjqp4JvQWE

AfmBOopZTWTWVit8c2CQodCQuXlQ4btPaxAhiBXiahYX6SZv8ixwb86lparts

oTzVZIG1aGltan0rOgulRTjqp4JvQWEparts AfmBOoqSyRJu8Y O

8qnTBiMqEiKmO8YCYePdculjmqoEoLhrlYB2AiX ||| ||| Quick Start Guide NX6000/NX3000/NX1000

Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker

Impedance Compensation NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier

with SmartSense L ||| Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-

Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX4-6000 Ultra-

Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense L ||| Quick Start Guide

NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with

SmartSense Loudspeaker Impedance Compensation NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel

Class-D Power Amplifier with SmartSense L

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt

Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation

NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI...

lang:en score:37 filesize: 6.64 M page_count: 23 document date: 2020-02-07



[\[pdf\]](#) Quick Start Guide Instructions Guide

FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona Behringer NX1000

Quick Start Guide Ultra Lightweight Class D 1000W Power Amplifier 248 7010 parts express pedocs manuals |||

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation

NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI...

lang:en score:37 filesize: 6.64 M page_count: 23 document date: 2020-02-07



lang:en score:34 filesize: 6.64 M page_count: 23 document date: 2020-02-07




[pdf]

NX4 6000 Index of images producto audioyvideoshop |||

Product Information Document Portable Amplifiers **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation ## Delivers 4 x 1600 Watts into 2 Ohms, 2 x 3000 Watts into 4 Ohms and weighs less than 13.4 lbs / 6.1 kg ## Ultimate reliabili...

lang:en score:33 filesize: 877.24 K page_count: 5 document date: 2020-06-04

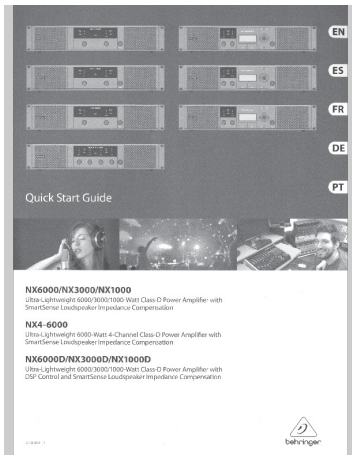

[pdf] User Manual Instructions

937NX3000 Behringer NX3000 CRUTCHFIELD COM JOSH N behringer nx1000d ultra lightweight class d power amplifier with dsp 352923 user manual search upload |||

NX6000/NX3000/NX1 000 Ultra-Lightweight 6000/3000/1000-Watt Class-0 Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-0 Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1 000D Ultra-Lightweight ...

lang:en score:32 filesize: 29.34 M page_count: 44 document date: 2018-09-16



[pdf] User Manual Quick Start Guide Instructions Guide

FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona parts express pedocs manuals 248 7017 Behringer NX6000D Manual Audio |||

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI...

lang:en score:31 filesize: 6.64 M page_count: 23 document date: 2020-02-07



[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide


FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona parts express
pedocs manuals 248 7012 Behringer NX3000 Manual Ultra Lightweight Class D 3000W Power Amplifier

|||

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt
Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation

NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with
SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D
UI...

lang:en **score:30** filesize: 6.64 M page_count: 23 document date: 2020-02-07

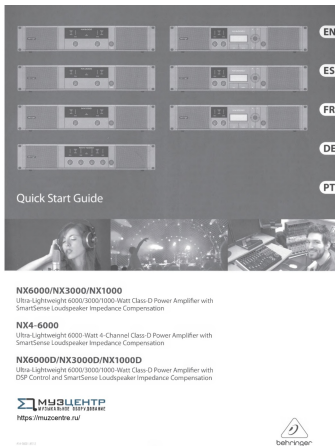


[\[pdf\]](#) Quick Start Guide Instructions Guide

937NX3000 Behringer NX3000 CRUTCHFIELD COM JOSH N BEHRINGER NX4 6000 инструкция pre
instalados Todas as outras instalagdes e modificacoes devem ser lado estereo em cada amplificador urn
para os alto falantes srsItid AfmBOoqPDIXm8XeI26ks2X7UAg1QtdL3GyvTh0MK6xYJTlhKhGfLnwZg
muzcentre ru |||

. - 0 p Quick Start Guide NX6000/NX3000/NX1 Ultra-Lightweight 6000/3000/1 -Watt
Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation

NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with
SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D...

lang:en **score:30** filesize: 3.63 M page_count: 44 document date: 2024-01-29

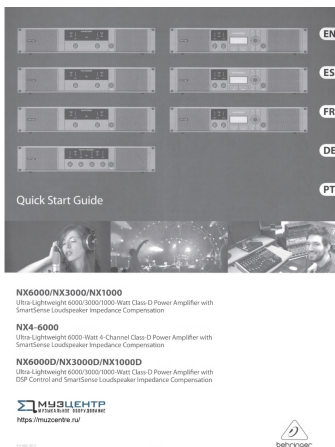


[\[pdf\]](#) Quick Start Guide Instructions Guide

937NX3000 Behringer NX3000 CRUTCHFIELD COM JOSH N BEHRINGER NX4 6000 инструкцияDJ
Setup Conexao para DJ HPX6000 XM8500 DDM4000 CROSSOVER B1220 PRO го о 3 с О о □ □ □ □ Д
ООО с 9@ МИ й 1 131 BEHRINGER инструкцияmuzcentre ru инструкция srsItid AfmBOooCzpc3M0fpf7
KEf2Umq6ltcU oKMxeBz8rC pPWxxfuN3XgOf |||

. - 0 p Quick Start Guide NX6000/NX3000/NX1 Ultra-Lightweight 6000/3000/1 -Watt
Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation

NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with
SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D...

lang:en **score:29** filesize: 3.63 M page_count: 44 document date: 2024-01-29

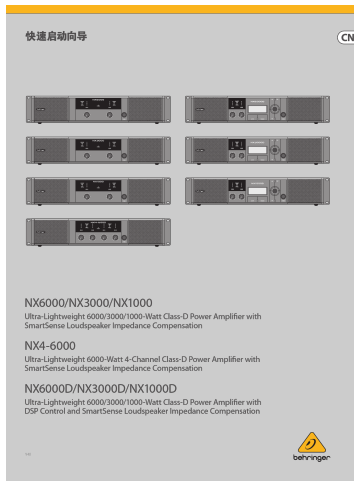


[\[pdf\]](#) Quick Start Guide Warranty

NX6000 NX3000 NX1000 NX4-6000 NX6000D NX3000D NX1000D NX-SERIES_QSG_CN mediadl musictribe media PLM data docs P0CAL

NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D Ultra-Lightweight 60...

lang:id score:28 filesize: 15.51 M page_count: 13 document date: 2021-03-11

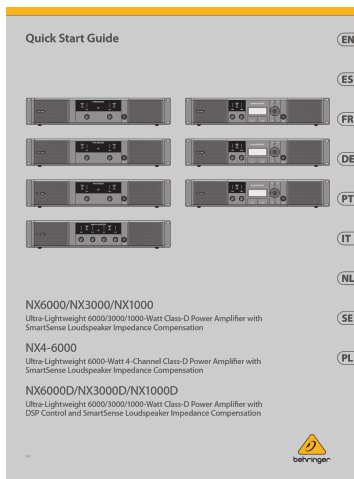

[\[pdf\]](#) Quick Start Guide Instructions Guide

Quick Start Guide Music Tribe Las terminales marcadas con este símbolo transportan corriente eléctrica de magnitud suficiente como para constituir un riesgo descarga NX SERIES QSG WW mediadl

musictribe media PLM data docs P0CAL

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI...

lang:en score:28 filesize: 45.78 M page_count: 31 document date: 2021-03-11



[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide

FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona Behringer NX1000

User Manual DE EN FR ES PT recordcase de media ae 21 7a

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI...

lang:en score:27 filesize: 6.27 M page_count: 23 document date: 2019-05-10



[pdf]

NX4 6000 Full Compass For service support or more information contact the BEHRINGER location nearest you Europe MUSIC Tribe Brands UK Ltd Tel 44156 273 2290 Email CARECea@music r group 3 of 5 SmartSense Impedance Compensation Our new Technology puts punch back into Class D amplification providing vastly improved full range frequency response with powerfully dynamic bass and smoother 2 Product Information Document Portable Amplifiers Ultra Lightweight Watt 4 Channel Power Amplifier Loudspeaker 34125 BehringerNX46000ProductInfoDocument 8850089246750 P0CHU fullcompass common files mediadl musictribe media sys master h64 h10 media63 music PLM data docs Product Information Document Portable Amplifiers **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation ## Delivers 4 x 1600 Watts into 2 Ohms, 2 x 3000 Watts into 4 Ohms and weighs less than 13.4 lbs / 6.1 kg ## Ultimate reliabili... lang:en score:26 filesize: 3.46 M page_count: 5 document date: 2018-01-25



[pdf] Quick Start Guide Instructions Guide


FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona Quick Start Guide Full Compass Systems NX6000 NX3000 NX1000 Ultra Lightweight 6000 3000 1000 Watt Class D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX4 4 Channel NX6000D NX3000D NX1000D 33163 BehringerNXSeriesQuickStartGuide fullcompass common files Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI... lang:en score:25 filesize: 6.34 M page_count: 23 document date: 2018-06-28

[\[pdf\]](#) Quick Start Guide Instructions Guide

937NX3000 Behringer NX3000 CRUTCHFIELD COM JOSH N BEHRINGER NX6000 инструкция 1 и 2 x
канальные купить в Москве с доставкой ff156fded26659ba20889cc04ed01036product 55977
muzcentre ru NX4 6000 NX3000D NX1000 NX1000D NX6000D rukovodstvo polzovatelya behri 2021 09
10 — Quick Start Guide C3Г3 о p NX1 OOO Ultra Lightweight 3000 Watt Class D Power Amplifier with 39
SmartSense Loudspeaker Impedance Compe bf031ac3e3c5a4e0176e2575084c23f8product 55979
b8a5268a9d8995074dd9c805bfd46135product 41339 a518824de34db9c9dceaeaed5d4c49aproduct
55982 f73966beb0a273066aa67b4065c872f8product 41340
b04f77ed6d0a677c657661dba0235a26product 55978 6156f722b0d9d4be774ecf6f1fa72d59product
55981 behringer nx1000d allfordj upload iblock 144 Руководство пользователя Усилители мощности
интернет магазине по низкой цене nx6000 a80 nx4 nx6000d nx3000d nx1000 nx3000 ffb 8d4 8ea 65c
648 6000Руководство NX1000DРуководство NX6000DРуководство NX3000DРуководство
NX6000Руководство NX1000Руководство NX3000BEHRINGER инструкцияBEHRINGER

инструкцияQuick ALL for DJQuick DJBehringer ценеBehringer цене1 доставкой1 доставкойDo not
defeat the safety purpose of polarized or grounding type plug A has two blades one wider than otherThis
level should give you best balance between signal strength and amp headroom ® En la pantalla DEQ
puede implementar los modulos de ecualizacion 2021 withQuick Comperukovodstvo 6000rukovodstvo
nx1000drukovodstvo nx6000drukovodstvo nx3000drukovodstvo nx6000rukovodstvo nx1000rukovodstvo
nx3000bf031ac3e3c5a4e0176e2575084c23f8product 0b8a5268a9d8995074dd9c805bfd46135product
0a518824de34db9c9dceaeaed5d4c49aproduct 0f73966beb0a273066aa67b4065c872f8product
0b04f77ed6d0a677c657661dba0235a26product 06156f722b0d9d4be774ecf6f1fa72d59product
0rukovodstvo srsItd AfmBOoobZpQy4OjAyh1cdpM0yKEnvDqRZL9odUULB7WIMD5vFec
ZqyXrukovodstvo nx1000db04f77ed6d0a677c657661dba0235a26product nx3000rukovodstvo
nx1000a518824de34db9c9dceaeaed5d4c49aproduct 0allfordj 6000allfordj nx1000dallfordj
nx6000dallfordj nx3000dallfordj nx6000allfordj nx1000allfordj nx3000muzcentre 0muzcentre ZqyXallfordj
AfmBOoobCLO09PLFenkeqZGYPVSu S1VaU87jymSFoaRcUMKEqZm24TM6allfordj nx1000dmuzcentre
nx3000allfordj nx1000muzcentre ecualizacion El ENTRADAS Conecte su fuente sonido al amplificador a
traves conectores TRS 6 3 mm XLR RCA Las tomas tambien aceptan TS mm2021
0ff156fded26659ba20889cc04ed01036product

AfmBOoob5CpYVcFHEIZJ5zPGVOgTuXeFEDqpeMweOGwpUdt3l2lThAu lallfordj |||
. - 0 p Quick Start Guide NX6000/NX3000/NX1 Ultra-Lightweight 6000/3000/1 -Watt
Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation
NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with
SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D...
lang:en **score:25** filesize: 4.19 M page_count: 44 document date: 2019-10-21

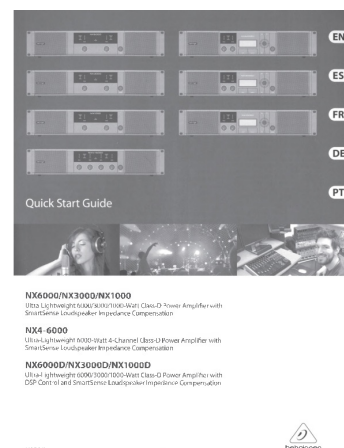

[\[pdf\]](#) Quick Start Guide Instructions Guide


FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona Quick Start Guide
im static thomann de NX6000 NX3000 NX1000 Ultra Lightweight 6000 3000 1000 Watt Class D Power
Amplifi er with SmartSense Loudspeaker Impedance Compensation NX4 4 Channel NX6000D NX3000D
NX1000D 448008 quickstartguide pics atg atgdata document gettingstarted
Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt
Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation
NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with
SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D
Ul...
lang:en **score:25** filesize: 6.34 M page_count: 23 document date: 2019-01-16



[\[pdf\]](#) Quick Start Guide Instructions Guide

FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona Quick Start Guide im static thomann de NX6000 NX3000 NX1000 Ultra Lightweight 6000 3000 1000 Watt Class D Power Amplifi er with SmartSense Loudspeaker Impedance Compensation NX4 4 Channel NX6000D NX3000D NX1000D 448418 quickstartguidenx pics atg atgdata document gettingstarted 448012 images Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI...

lang:en score:25 filesize: 6.34 M page_count: 23 document date: 2019-02-06

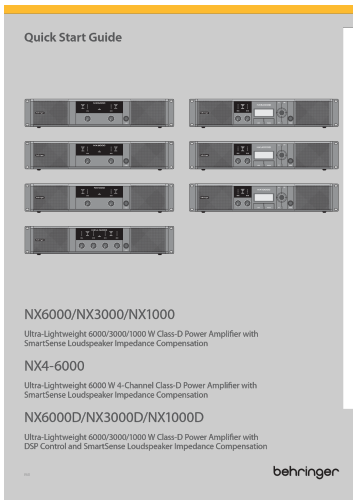

[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide

NX6000 NX3000 NX1000 NX4 6000 NX6000D NX3000D NX1000D Terminals marked with this symbol carry electrical current of sufficient magnitude to constitute risk electric shock Use only high quality professional behringerNXmanual warehousesound r ||| Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000 W Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000 W 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D Ultra-Li...


lang:en score:25 filesize: 9.15 M page_count: 36 document date: 2024-12-07



[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide

FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona Quick Start Guide media63 music group NX6000 NX3000 NX1000 Ultra Lightweight 6000 3000 1000 Watt Class D Power Amplifi er with SmartSense Loudspeaker Impedance Compensation NX4 4 Channel NX6000D NX3000D NX1000D NX SERIES media PLM data docs P0CHS P0CHU cdn webshopapp 88497897144621 shops 237635 files 274777429 Parts Express Amplifier a79d09be2dc6c01ae9821e0803f34d2b2b39 gzhl5 at blob ldb c d accompanying literature Please read the manual Caution To reduce risk of electric shock do not remove top cover or rear section No user serviceable parts inside Refer servicing to qualified personnel fire expose this appliance rain and moisture 8849819238430 mediadl musictribe sys master hb9 hcc 2237 file dj store ru jp juno co uk 699341 01U proacousticsusa wysiwyg 8849991565342 h70 h34 Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI...

lang:en score:24 filesize: 6.26 M page_count: 23 document date: 2017-08-15

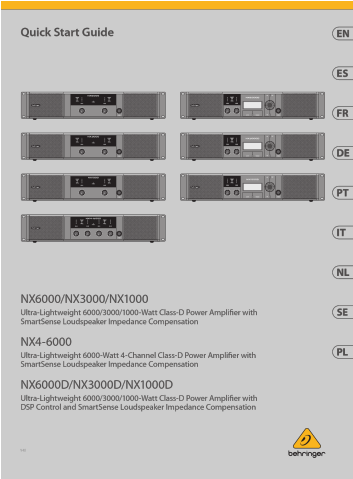

Модели		
Модели	Технически параметри	Цена на дребно с ДДС
	Смесителен пульт с модул в 2 канала XENYX XENYX микрофонни предусилители. Вграден стерео USB аудио интерфейс и миксър директно към компютър.	90.00 лв.
	Смесителен пульт с модул в 2 канала XENYX XENYX микрофонни предусилители и компютър. Behr EQ и USB аудио интерфейс. Угрява миксър на писта. Функционални параметри: XENYX микрофонни предусилители, сравнява с калител, бутон за преглед. Смесителен компютър, със стерео аудио управление на писта бутон и компютър LED индикатори за професионални инструменти или миксър. Вграден стерео USB аудио интерфейс и миксър директно към компютър.	109.00 лв.
	Смесителен пульт с модул в 2 канала XENYX XENYX микрофонни предусилители и компютър. Behr EQ и USB аудио интерфейс. Угрява миксър на писта. Функционални параметри: XENYX микрофонни предусилители, сравнява с калител, бутон за преглед. Смесителен компютър, със стерео аудио управление на писта бутон и компютър LED индикатори за професионални инструменти или миксър. Вграден стерео USB аудио интерфейс и миксър директно към компютър.	140.00 лв.
	Смесителен пульт с модул в 2 канала XENYX XENYX микрофонни предусилители и компютър. Behr EQ и USB аудио интерфейс. Угрява миксър на писта. Функционални параметри: XENYX микрофонни предусилители, сравнява с калител, бутон за преглед. Смесителен компютър, със стерео аудио управление на писта бутон и компютър LED индикатори за професионални инструменти или миксър. Вграден стерео USB аудио интерфейс и миксър директно към компютър.	158.00 лв.

[\[pdf\]](#) Quick Start Guide Instructions Guide

SCARICA LA GUIDA BEHRINGER NX1000 POWER AMPLIFIER behringer NX3000 luckymusic img cms

||| Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt

Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation

NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with

SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D

UI...

lang:en **score:24** filesize: 23.66 M page_count: 21 document date: 2021-06-30

[\[pdf\]](#)

EN LeafletBehringer Amplificateur NX4 600051791955assets brack ch documents2 5 9 51791955 |||

Product Information Document Portable Amplifiers **NX4-6000** Ultra-Lightweight 6000-

Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance

Compensation ## Delivers 4 x 1600 Watts into 2 Ohms, 2 x 3000 Watts into 4 Ohms

and weighs less than 13.4 lbs / 6.1 kg ## Ultimate reliabili...

lang:en **score:20** filesize: 3.46 M page_count: 5 document date: 2018-01-25

[\[pdf\]](#) Price List

Liliya PRICE LIST BEHRINGER 05 2019 1 Модел Технически параметри Цена на дребно с ДДС

Behringer Price May behringer bg list |||

PRICE LIST BEHRINGER 05.2019 Behringer XENYX 302USB USB Analog Mixer 1 2

xoa c NY p ... a acaa aeoc 11 432.00 . 555.00 . PRICE LIST BEHRINGER 05.2019

Behringer NX6000 Power Amplifier **NX4-6000** Behringer Eurolive VS1220 12 Passive

PA Speaker Behringer Eurolive VS1520 15 Passive PA...

lang:en **score:20** filesize: 1.28 M page_count: 20 document date: 2019-05-21



[\[pdf\]](#) Quick Start Guide Warranty

FEEL Prod Grap PH Artwork P0CAL QSG CN A4 2017 08 10 Rev 5 indd john elona Документация

Усилитель мощности Behringer NX3000D 57 МБ Купить Двухканальный усилитель в Архангельске
цена 25655 руб 1 отзыв о товаре интернет магазин Pult.ru 91297e8515a054ad6c9948f81c2008a0
arhangelsk pult upload iblock 912 |||

NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D Ultra-Lightweight 60...

lang:i-klnglon score:20 filesize: 5.57 M page_count: 13 document date: 2017-08-15



[\[pdf\]](#) Quick Start Guide Warranty

FEEL Prod Grap PH Artwork P0CAL QSG CN A4 2017 08 10 Rev 5 indd john elona 8850153570334

mediadl musictribe media sys master h0f hb5 |||

NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D Ultra-Lightweight 60...

lang:i-klnglon score:18 filesize: 5.59 M page_count: 13 document date: 2017-08-15



[\[pdf\]](#) Quick Start Guide Warranty

FEEL Prod Grap PH Artwork P0CAL QSG JP A4 2017 08 10 Rev 6 indd john elona NX SERIES media

music group PLM data docs P0CHT P0CHV P0CHW

NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation **NX4-6000** Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D Ultra-Lightweight 60...

lang:i-klnglon score:18 filesize: 5.59 M page_count: 13 document date: 2017-08-15



[\[pdf\]](#) Quick Start Guide Instructions Guide

FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona NX3000 Index of images producto audioyvideoshop |||

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation
NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI...

lang:en score:17 filesize: 5.25 M page_count: 23 document date: 2020-06-04




[\[pdf\]](#) Quick Start Guide Instructions Guide

FEEL Prod Grap PH Artwork P0CAL QSG WW A4 2017 08 10 Rev 13 indd john elona Multilanguage HandbuchBehringer Amplificateur NX300051769072assets brack ch documents2 2 7 51769072 |||

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000-Watt Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation
NX4-6000 Ultra-Lightweight 6000-Watt 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D UI...

lang:en score:17 filesize: 6.26 M page_count: 23 document date: 2017-08-15

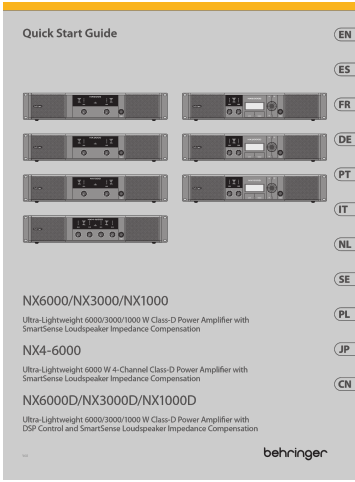


[\[pdf\]](#) Quick Start Guide Instructions Guide

1137772 bhphotovideo lit files |||

Quick Start Guide NX6000/NX3000/NX1000 Ultra-Lightweight 6000/3000/1000 W Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation
NX4-6000 Ultra-Lightweight 6000 W 4-Channel Class-D Power Amplifier with SmartSense Loudspeaker Impedance Compensation NX6000D/NX3000D/NX1000D Ultra-Li...

lang:en score:17 filesize: 54.44 M page_count: 36 document date: 2024-07-05

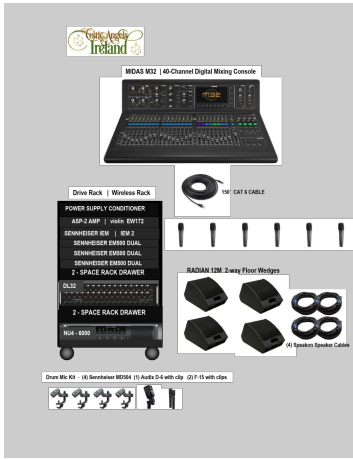

[pdf]

June 7 2002 Chris 5f56f60865134e8dc9026ed0 3 CELTIC ANGELS TOUR RACK 2020 assets global website files 5f4ac5d8acdb4bbd1ee1ba5c |||

MIDAS M32 40-Channel Digital Mixing Console Drive Rack Wireless Rack POWER SUPPLY CONDITIONER ASP-2 AMP violin EW172 SENNHEISER IEM IEM 2 SENNHEISER EM500 DUAL SENNHEISER EM500 DUAL SENNHEISER EM500 DUAL 2 - SPACE RACK DRAWER DL32 2 - SPACE RACK DRAWER NU4 - 6000 150 CAT 6 CABLE RADIAN 12...

lang:en score:16 filesize: 368.65 K page_count: 2 document date: 2020-02-12



[B&H Professional Audio Equipment Catalog - Microphones, Studio Gear, Instruments & More](#)

Explore the extensive B&H Professional Audio catalog featuring a wide range of microphones, studio monitors, mixers, instruments, and accessories for broadcast, studio, and live sound applications. Includes detailed product overviews and expert tips for optimal audio production.

lang:en score:11 filesize: 6.33 M page_count: 48 document date: 2019-05-01



[Catálogo de Equipos de Audio Profesional Senal y B&H](#)

Explore a comprehensive catalog of professional audio equipment from Senal and B&H, featuring communication headsets, lavalier microphones, studio microphones (condenser, dynamic, ribbon, tube, USB), mixers, preamplifiers, compressors, equalizers, digital recorders, DJ gear, keyboard controllers, synthesizers, digital pianos, guitar amplifiers, drum equipment, effect pedals, wireless systems, PA speakers, and DJ lighting. Includes expert tips for achieving great vocal sound in a home studio.

lang:es score:10 filesize: 5.84 M page_count: 48 document date: 2019-06-04