

## VEVOR 10L1201B

# VEVOR 2-Slot Automatic Watch Winder User Manual

Model: 10L1201B

## 1. INTRODUCTION

Thank you for choosing the VEVOR 2-Slot Automatic Watch Winder. This device is designed to keep your automatic watches wound and ready to wear, preventing them from stopping and maintaining their accuracy. It features quiet Japanese motors, multiple rotation modes, and adjustable speeds to suit various mechanical watches. Please read this manual thoroughly before use to ensure proper operation and longevity of your watch winder.

## 2. SAFETY INSTRUCTIONS

- Ensure the power adapter is compatible with your local voltage before plugging it in.
- Do not expose the watch winder to water or high humidity.
- Avoid placing the unit in direct sunlight or near strong magnetic fields.
- Keep out of reach of children and pets.
- Do not attempt to disassemble or repair the unit yourself. Contact customer support if issues arise.
- Always unplug the power adapter before cleaning or when not in use for extended periods.

## 3. PACKAGE CONTENTS

Upon unpacking, please verify that all items listed below are included:

- 1 x VEVOR 2-Slot Automatic Watch Winder
- 1 x Power Adapter
- 1 x Cleaning Cloth
- 1 x User Manual

## 4. PRODUCT OVERVIEW

The VEVOR watch winder is designed to provide optimal care for your automatic watches with several key features:

- **Strong Compatibility:** Supports most mechanical watches with strap lengths from 150-207mm (5.90-8.14 inches) and a maximum dial size of 64mm (2.51 inches).
- **Precise Knob Adjustments:** Independent control knobs for direction (clockwise, counterclockwise, alternating) and speed (Turns Per Day - TPD).
- **Durable Mabuchi Motor:** Equipped with quiet Japanese Mabuchi motors for stable, low-noise operation, high torque, and long lifespan.
- **Practical Details:** Features flexible watch pillows made of soft ABS material to prevent scratches, an open lid stop function to prevent wear, and an LED blue light for display.
- **Effective Protection:** Constructed with a thickened solid wood outer box, lacquer finish, high-transparency acrylic clasp door, and a soft PU interior to protect watches from scratches and impacts.

**VEVOR**  
TOUGH TOOLS, HALF PRICE

## EXPANDING WATCH PILLOW WITH MULTI CONTROL MODES

Compatible with various men's and women's mechanical watches

Suitable Strap Length Range: 5.90-8.14 inch/150-207mm  
Maximum Dial Diameter: 2.51 inch/64 mm

10.43"/265mm  
7.08"/180mm  
7.59"/193mm

**Soft ABS Pillow Core**  
Care for Your Watches

Image: The VEVOR watch winder features expanding watch pillows and multi-control modes, compatible with various watch sizes.

## 5. SETUP

1. **Unpack:** Carefully remove the watch winder from its packaging. Retain all packaging materials for future transport or storage.

- Power Connection:** Connect the provided power adapter to the DC input port on the back of the watch winder. Plug the adapter into a standard electrical outlet. Alternatively, the unit supports battery power for portability (batteries not included).
- Place Watches:** Gently place your automatic watches onto the flexible watch pillows. Ensure the watch is securely fitted and the pillow is properly inserted into the winder slot.

## 6. OPERATING INSTRUCTIONS

The VEVOR watch winder offers independent control for each winding slot, allowing you to customize settings for different watches.

### 6.1. Rotation Modes and Speed Adjustment

Each winding slot has two control knobs:

- **Left Knob (Direction/Mode):** Controls the rotation direction and mode.
- **Right Knob (Speed):** Adjusts the Turns Per Day (TPD).

# ROTATION/SPEED INDEPENDENT ADJUSTMENT

Precise winding for different watch models

<b>Mode1</b>	OFF Switch
<b>Mode2</b>	Turn positive for 2 minutes, stop for 13 minutes, cycle. 12 hours on, 12 hours off.
<b>Mode3</b>	Reverse for 2 minutes, stop for 13 minutes, repeat. 12 hours on, 12 hours off.
<b>Mode4</b>	Turn positive for 2 minutes, stop for 18 minutes, Cycle. Reverse for 2 minutes, stop for 18 minutes, repeat. 12 hours on, 12 hours off.
<b>Mode5</b>	4 minutes on, 28 minutes off, loop. Reverse for 4 minutes, stop for 28 minutes, Cycle. 12 hours on, 12 hours off.

Image: Detailed view of the independent adjustment knobs for rotation and speed.

#### Rotation Modes:

Mode	Description
------	-------------

Mode	Description
<b>Mode 1 (OFF)</b>	Turns the winder off.
<b>Mode 2</b>	Turns clockwise for 2 minutes, stops for 13 minutes, then repeats. Cycles for 12 hours on, 12 hours off.
<b>Mode 3</b>	Turns counterclockwise for 2 minutes, stops for 13 minutes, then repeats. Cycles for 12 hours on, 12 hours off.
<b>Mode 4</b>	Turns clockwise for 2 minutes, stops for 18 minutes. Reverses for 2 minutes, stops for 18 minutes, then repeats. Cycles for 12 hours on, 12 hours off.
<b>Mode 5</b>	Turns clockwise for 4 minutes, stops for 28 minutes. Reverses for 4 minutes, stops for 28 minutes, then repeats. Cycles for 12 hours on, 12 hours off.

### **Speed Adjustments (TPD):**

The right knob allows you to select the desired Turns Per Day (TPD) for your watch. Available settings typically include 650, 750, 850, 1000, and 1950 TPD. Consult your watch manufacturer's recommendations for the optimal TPD setting.

### **6.2. LED Light Operation**

The watch winder features an LED blue light. This light can be turned on or off via a switch, providing ambient illumination for your watches, especially useful for display or in low-light conditions.

### **6.3. Open-Lid Stop Function**

For convenience and to prevent unnecessary wear on the mechanism, the winder automatically stops rotation when the front acrylic door is opened. Rotation resumes once the door is closed.

# MULTIPLE USER-FRIENDLY PRACTICAL FUNCTIONS

Meet different usage scenarios

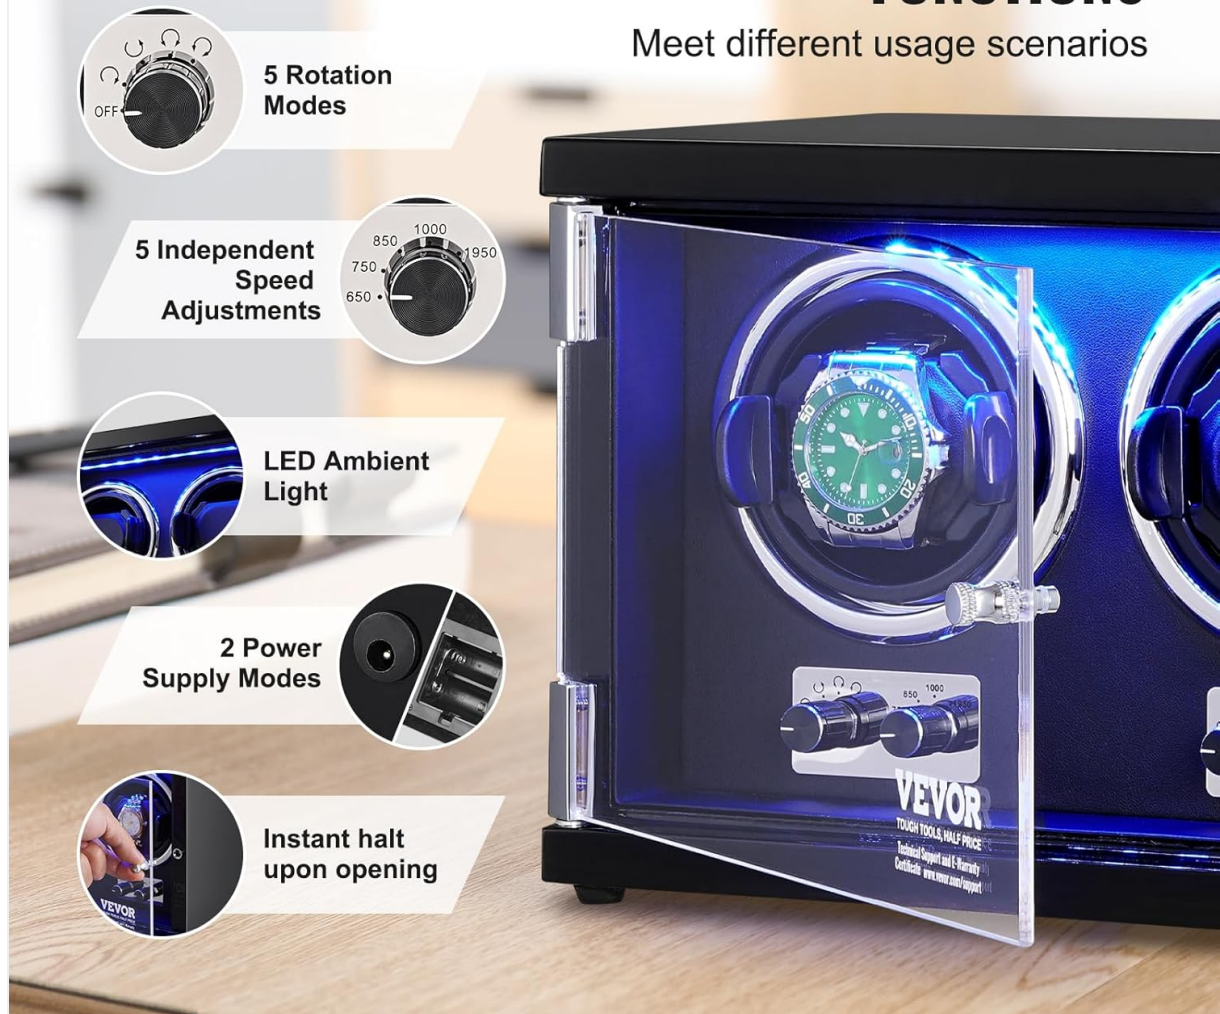


Image: The watch winder features multiple user-friendly functions, including LED ambient light and instant halt upon opening.

## 7. MAINTENANCE

- **Cleaning:** Use the provided cleaning cloth or a soft, dry cloth to wipe the exterior of the watch winder. For the acrylic door, use a soft cloth and a mild, non-abrasive cleaner if necessary. Avoid harsh chemicals that may damage the finish. The PU interior is also easy to clean with a damp cloth.
- **Dust Protection:** Keep the front door closed when not accessing watches to prevent dust accumulation inside the unit.
- **Storage:** If storing the watch winder for an extended period, unplug it from the power source and store it in a cool, dry place.

## 8. TROUBLESHOOTING

If you encounter any issues with your VEVOR watch winder, please refer to the following common problems and solutions:

- **Winder Not Rotating:**
  - Ensure the power adapter is securely plugged into both the unit and the wall outlet.
  - Check if the power outlet is functioning correctly.

- Verify that the rotation mode knob is not set to 'OFF'.
- Ensure the front door is fully closed, as the open-lid stop function will halt rotation.
- **Excessive Noise:**
  - While the Japanese Mabuchi motors are designed for quiet operation, ensure the unit is placed on a stable, flat surface to minimize vibrations.
  - Check that watches are properly seated on the pillows and not touching the interior walls.
- **LED Light Not Working:**
  - Verify that the LED light switch is in the 'ON' position.
  - Ensure the unit is receiving power.
- **Watch Not Keeping Time:**
  - Confirm that the correct TPD (Turns Per Day) setting is selected for your specific watch model. Refer to your watch's manual or manufacturer's website for recommended TPD.
  - Ensure the watch is fully wound before placing it in the winder for the first time.
  - Try a different rotation mode (clockwise, counterclockwise, or alternating) if your watch requires a specific direction.

If these steps do not resolve the issue, please contact VEVOR customer support for further assistance.

## 9. SPECIFICATIONS



Item Model Number: **10L1201B**

Product Size(LxWxH): **10.43 x 7.08 x 7.59 inches/265 x 180 x 193 mm**

Pillow Dimensions: **3.22 x 3.18 inches/82 x 81 mm**

Adjustable Strap Length Range: **5.90-8.14 inches/150-207 mm**

Maximum Dial Diameter: **2.51 inches/64 mm**

Net Weight: **7.07 lbs/3.21 kg**

Accessories: **1 x Adapter / 1 x Cleaning Cloth / 1 x User Manual**

Image: Product dimensions and key specifications of the VEVOR watch winder.

Feature	Detail
Model Number	10L1201B
Product Dimensions (L x W x H)	10.43"D x 7.08"W x 7.59"H (265 x 180 x 193 mm)
Pillow Dimensions	3.22 x 3.18 inches (82 x 81 mm)
Adjustable Strap Length Range	5.90-8.14 inches (150-207 mm)
Maximum Dial Diameter	2.51 inches (64 mm)
Material	High-Density Board + Acrylic (Exterior), PU (Interior)
Net Weight	7.07 lbs (3.21 kg)
Motor Type	Japanese Mabuchi Motors
Power Supply	AC Adapter (included), Battery (not included)
Number of Slots	2

Feature	Detail
<b>Special Features</b>	LED Blue Light, Open-Lid Stop Function, Independent Control

## 10. WARRANTY AND SUPPORT

VEVOR products are designed for durability and performance. For warranty information or technical support, please refer to the warranty card included with your product or visit the official VEVOR website. You can also contact VEVOR customer service directly for assistance with any product-related inquiries or issues.

For additional support and e-warranty certificate, please visit: [www.vevor.com/support](http://www.vevor.com/support)