

Arteck HW086MW162

Arteck 2.4G Wireless Keyboard and Mouse Combo User Manual

Model: HW086MW162

INTRODUCTION

This manual provides comprehensive instructions for the Arteck 2.4G Wireless Keyboard and Mouse Combo. Designed for optimal comfort and efficiency, this ultra-compact, slim, stainless steel full-size keyboard and ergonomic mouse are compatible with various devices including computers, desktops, PCs, laptops, and Windows 10/8/7 operating systems. Both devices feature built-in rechargeable batteries for extended use.



Figure 1: Arteck 2.4G Wireless Keyboard and Mouse Combo with USB receiver.

FEATURES

- Easy Setup:** Simply insert the nano USB receiver (stored inside at the back of the mouse) into your computer and use the keyboard and mouse instantly.
- One USB Receiver for All:** Use the Keyboard and the Mouse with the same receiver, to save the USB port in your computer.
- Long Life Rechargeable Battery:** Rechargeable lithium battery with an industry-high capacity lasts for 6 months for the keyboard and 4 months for the mouse with single charge (based on 2 hours non-stop use per day).
- Ergonomic Design:** Stainless steel keyboard material gives heavy duty feeling, low-profile keys offer comfortable typing. Ergonomic mouse reduce stress and use more comfortably.
- Quiet Typing:** The whisper-quiet, low-profile keys bring a whole new level of comfort to your fingertips.

- **Adjustable Mouse DPI:** The mouse DPI switch allows you to change the speed of the moving cursor (800 / 1000 / 1200 DPI).
- **Hot Keys:** Gain quick access to common functions, such as volume level, playback control, copy paste text, and more, with Windows-dedicated hot keys.



Figure 2: Ergonomic mouse design highlighting adjustable DPI and silent clicking.

SETUP GUIDE

1. **Locate the USB Receiver:** The nano USB receiver is conveniently stored inside the back compartment of the wireless mouse. Gently open the battery cover on the underside of the mouse to retrieve it.
2. **Insert the Receiver:** Plug the USB receiver into an available USB port on your computer, desktop, PC, or laptop.
3. **Power On Devices:**
 - For the keyboard, locate the power switch on the back edge and slide it to the "ON" position.
 - For the mouse, locate the power switch on the underside and slide it to the "ON" position.
4. **Automatic Connection:** The keyboard and mouse will automatically connect to your device. No additional drivers are required.



EASY SETUP

Plug the nano USB receiver and use

* The nano USB receiver is stored inside the back of the mouse.

The keyboard and the mouse share the same USB receiver to save the USB port.

Figure 3: Illustration of the easy setup process, showing the USB receiver and its storage location in the mouse.



Figure 4: Rear view of the keyboard showing the power switch and silicone non-slip pads.

OPERATING INSTRUCTIONS

Keyboard Usage

- **Typing:** The low-profile keys provide a comfortable and quiet typing experience.
- **Function Keys (F1-F12):** These keys often have secondary functions (media control, volume, etc.) when pressed in combination with the **Fn** key. Refer to your operating system's settings for specific hotkey functionalities.
- **Windows Hot Keys:** Dedicated hot keys provide quick access to common Windows functions.

Mouse Usage

- **Movement:** Move the mouse on a flat surface to control the cursor.
- **Clicking:** Left-click for selection, right-click for context menus. The mouse features silent clicking for a quiet environment.
- **DPI Adjustment:** Press the DPI switch button (located behind the scroll wheel) to cycle through 800, 1000, and 1200 DPI settings. This adjusts the cursor sensitivity and speed.
- **Scroll Wheel:** Use the scroll wheel for vertical scrolling in documents and web pages.

MAINTENANCE

Charging the Battery

Both the keyboard and mouse are equipped with built-in rechargeable lithium-polymer batteries. Use the provided

USB charging cable to recharge them.

- Connect the small end of the USB charging cable to the charging port on the keyboard/mouse.
- Connect the larger end of the USB charging cable to a USB power source (e.g., computer USB port, USB wall adapter).
- An indicator light will typically show charging status (e.g., red for charging, off or green for fully charged).
- A full charge provides approximately 6 months of use for the keyboard and 4 months for the mouse (based on 2 hours non-stop use per day).

Long Battery Life and Rechargeable

Keyboard use for 6 months per charge, based on 2 hours per day

Mouse use for 4 months per charge, based on 2 hours per day



Figure 5: Visual representation of the long battery life for both keyboard and mouse.

Cleaning

- Ensure both devices are powered off before cleaning.
- Use a soft, lint-free cloth slightly dampened with water or a mild cleaning solution.
- Avoid excessive moisture and do not spray cleaners directly onto the devices.
- For keyboard keys, a can of compressed air can be used to remove dust and debris.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Keyboard/Mouse not responding	Low battery; USB receiver not properly connected; Devices not powered on; Interference.	Charge the devices; Re-insert the USB receiver firmly; Ensure power switches are ON; Move closer to the receiver or away from other wireless devices.
Lagging or erratic cursor movement	Low battery; Surface issues for mouse; Wireless interference; Incorrect DPI setting.	Charge the mouse; Use the mouse on a non-reflective, opaque surface; Reduce interference; Adjust mouse DPI.
Keys not typing correctly	Low battery; Software issue; Debris under keys.	Charge the keyboard; Restart your computer; Clean the keyboard with compressed air.
Cannot connect to device	USB receiver not recognized; Out of range.	Try a different USB port; Ensure devices are within 33 feet (10 meters) of the receiver.

SPECIFICATIONS

Attribute	Detail
Brand	Arteck
Model Number	HW086MW162
Connectivity Technology	2.4G USB Wireless
Compatible Devices	Laptop, Personal Computer, Television (Windows 10/8/7)
Keyboard Dimensions	11.06 x 5.28 x 0.55 inches (28 x 13.5 x 1.4 cm)
Keyboard Weight	10.2 oz (310 g)
Mouse Dimensions	4.45 x 2.44 x 1.3 inches (11.3 x 6.2 x 3.3 cm)
Mouse Weight	2.84 oz (80.5 g)
Battery Type	1 Lithium Ion battery (included)
Special Features	Compact, Rechargeable, Ergonomic Design, Silent Clicking, Adjustable DPI
Color	Black

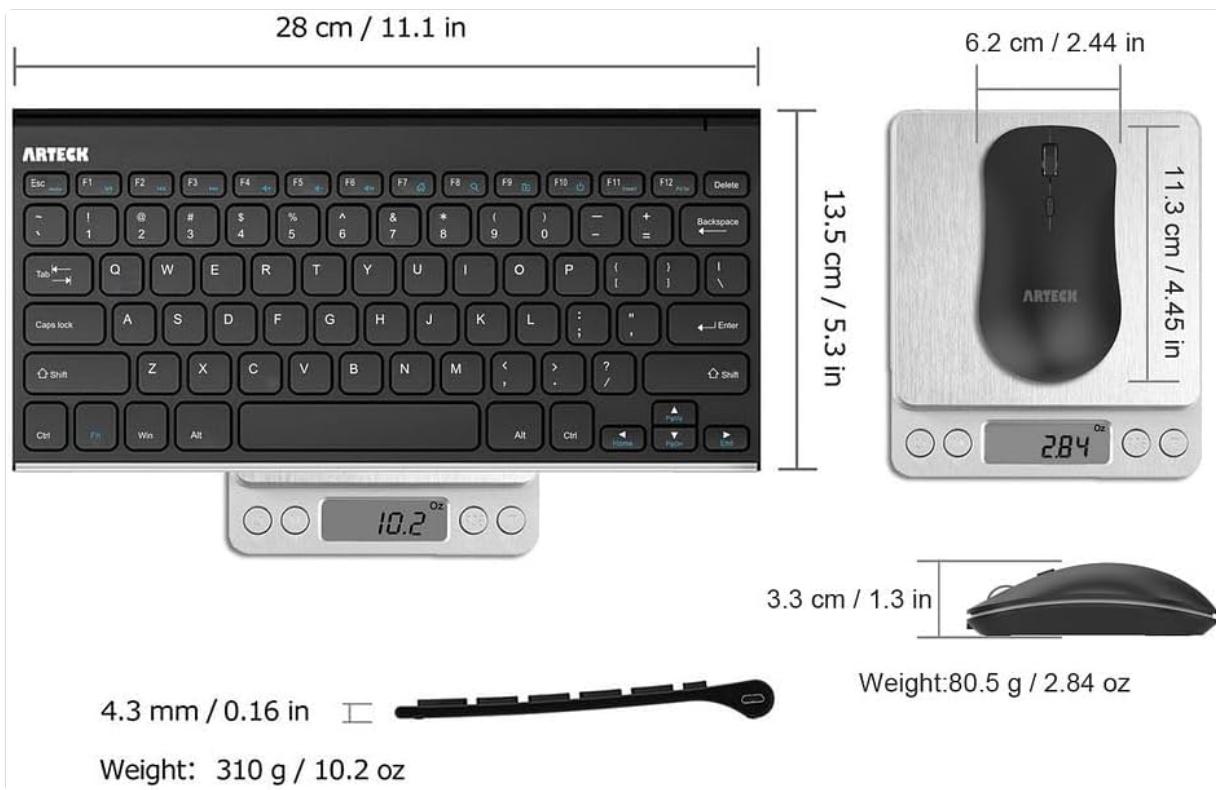


Figure 6: Detailed dimensions of the Arteck keyboard and mouse.

WARRANTY AND SUPPORT

Arteck provides a **24-month warranty** for this product, ensuring peace of mind regarding its quality and performance.

For any warranty claims, technical support, or customer service inquiries, please contact Arteck directly:

- Email: support@arteck.com

Please have your model number (HW086MW162) and purchase details ready when contacting support.