Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

TNICER T2

TNICER T2 Motorcycle Bluetooth Headset User Manual

Model: T2

Introduction

This user manual provides detailed instructions for the installation, operation, and maintenance of your TNICER T2 Motorcycle Bluetooth Headset. Please read this manual thoroughly before using the device to ensure proper function and safety. The T2 headset is designed to provide clear communication and entertainment for motorcycle riders, supporting group intercom, music sharing, and phone calls.



Image: Two TNICER T2 Motorcycle Bluetooth Headsets, showcasing their design and compact form factor.

Safety Information

Always prioritize safety while riding. Using communication devices can be distracting. Ensure you are familiar with local laws and regulations regarding the use of communication devices while operating a motorcycle. Keep the volume at a level that allows you to hear ambient sounds and traffic. Do not attempt to operate the device in a manner that compromises your safety or the safety of others.

- Do not disassemble or modify the device.
- Keep the device away from extreme temperatures and direct sunlight.
- Ensure the device is securely mounted to your helmet.
- Avoid exposing the device to water beyond its IP67 rating.

Package Contents

Verify that all items listed below are included in your package:

- T2 Bluetooth Headset Unit(s)
- Boom Microphone & Speakers
- Button Microphone
- Mounting Bracket
- 3M Velcro (for mounting)
- Velcro for Microphone
- Velcro for Speaker
- Speaker Booster Pads
- USB-C Cable
- Metal Clip
- User Guide (this manual)

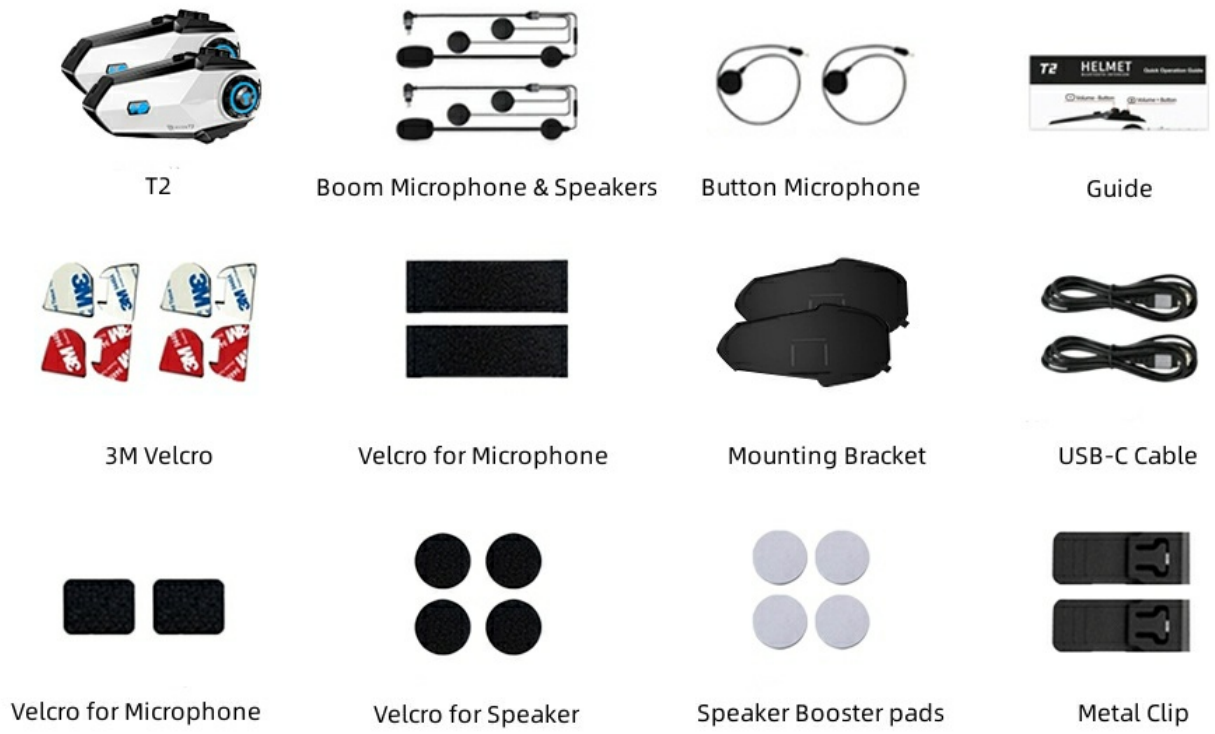


Image: A visual representation of all components included in the TNICER T2 headset package.

Product Overview

The TNICER T2 headset features a streamlined design with intuitive controls for easy operation while riding. Key components include the main unit, speakers, and microphone.

Controls and Indicators

- **Power/Intercom Button:** Used for powering on/off, initiating intercom, and automatic pairing.
- **Multi-function Button (M Button):** Controls music playback, phone calls, and voice assistant.
- **Volume Up/Down:** Adjusts audio volume.
- **Charging Port:** USB-C port for charging the device.
- **LED Indicator:** Displays device status (pairing, charging, operation).

Setup

1. Mounting the Headset Unit

The T2 unit can be mounted to most helmets using either the metal clip or the 3M adhesive velcro.

1. **Using the Metal Clip:**
    - Slide the metal clip between the helmet shell and the inner padding on the left side of the helmet.
    - Ensure the clip is firmly secured.
    - Attach the T2 main unit to the mounting bracket on the clip until it clicks into place.
2. **Using 3M Adhesive Velcro:**

- Clean the desired mounting area on the helmet surface thoroughly.
- Peel off the protective film from one side of the 3M adhesive velcro and firmly press it onto the helmet.
- Attach the corresponding velcro piece to the T2 main unit.
- Press the T2 unit firmly onto the velcro on the helmet.

2. Installing Speakers and Microphone

Choose between the boom microphone (for open-face helmets) or the button microphone (for full-face helmets).

1. **Speaker Installation:**
    - Locate the ear pockets inside your helmet.
    - Attach the velcro pads for speakers to the inside of the helmet's ear pockets.
    - Place the speakers onto the velcro pads, ensuring they are centered over your ears for optimal sound. Use speaker booster pads if needed for better fit or volume.
    - Route the speaker wires neatly under the helmet padding to the T2 main unit.
2. **Microphone Installation:**
    - **Boom Microphone:** Attach the velcro for the microphone to the inside of the helmet near your mouth. Secure the boom microphone to this velcro.
    - **Button Microphone:** Attach the velcro for the microphone to the chin bar of your full-face helmet. Secure the button microphone to this velcro.
    - Connect the microphone cable to the appropriate port on the T2 main unit.

3. Charging the Device

Before first use, fully charge the T2 headset. A full charge takes approximately 2-3 hours.

- Connect the provided USB-C cable to the charging port on the T2 unit.
- Connect the other end of the cable to a USB power adapter (not included) or a computer USB port.
- The LED indicator will show charging status (e.g., red while charging, blue when fully charged).



Image: The TNICER T2 headset features a 900mAh battery, providing extended usage, and its remaining charge can be displayed on a connected phone.

Operating Instructions

Power On/Off

- **Power On:** Press and hold the Power/Intercom Button for approximately 3 seconds until the LED indicator lights up and you hear a voice prompt.
- **Power Off:** Press and hold the Power/Intercom Button for approximately 3 seconds until the LED indicator turns off and you hear a voice prompt.

Bluetooth Pairing (with Phone/GPS)

The T2 headset can connect to your smartphone or GPS device via Bluetooth for calls, music, and navigation.

1. Ensure the T2 headset is powered off.

2. Press and hold the Power/Intercom Button for about 5-7 seconds until the LED indicator flashes red and blue alternately, indicating pairing mode.
3. On your smartphone or GPS, enable Bluetooth and search for new devices.
4. Select "TNICER T2" from the list of available devices.
5. Once paired, the LED indicator will flash blue slowly, and you will hear a confirmation tone.

Intercom Pairing (Automatic Pairing)

The T2 features an automatic pairing function for multiple T2 units, simplifying group communication setup.



Image: The T2 headset supports one-touch automatic connection, simplifying the pairing process for multiple units.

1. Ensure all T2 headsets to be paired are powered on and not connected to other devices.
2. On one T2 unit (the master unit), press the Power/Intercom Button once.
3. The master unit will automatically search for and pair with other nearby T2 units.
4. The LED indicators on all successfully paired units will change to a steady blue, indicating an active intercom

connection.

5. Up to 6 riders can be connected for real-time intercom communication.



Image: The TNICER T2 supports group communication for up to 6 riders, with a communication distance of up to 1000 meters.

Intercom Communication

- Once paired, intercom communication is active.
- To temporarily disconnect from intercom, press the Power/Intercom Button once. Press again to reconnect.

Music Playback and Sharing

After pairing with your phone, you can play music and share it with another T2 user.

- **Play/Pause:** Press the Multi-function Button once.
- **Next Track:** Press the Volume Up button.
- **Previous Track:** Press the Volume Down button.

- **Music Sharing:** While music is playing, press and hold the Multi-function Button for 2 seconds to initiate music sharing with a paired T2 unit. The sharing distance is approximately 20-30 meters.

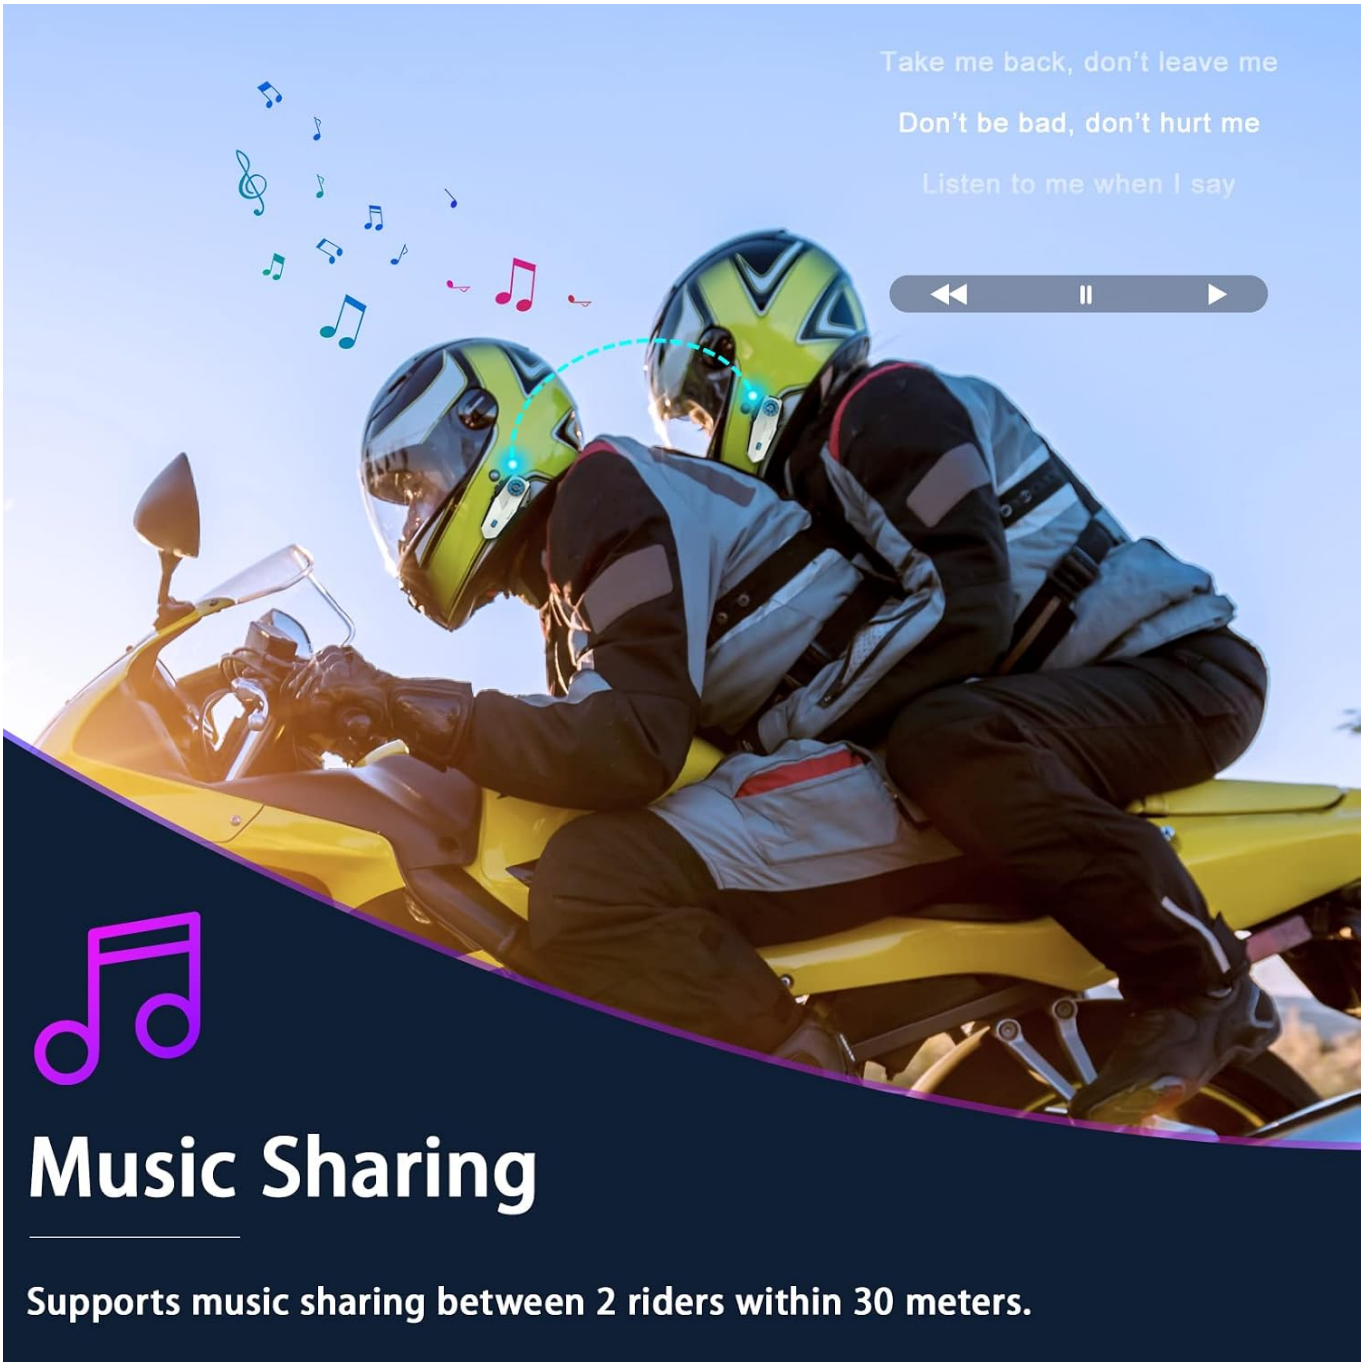


Image: The T2 headset allows for music sharing between two riders within a 30-meter range, enhancing the riding experience.

Phone Calls

- **Answer Call:** Press the Multi-function Button once.
- **End Call:** Press the Multi-function Button once during a call.
- **Reject Call:** Press and hold the Multi-function Button for 2 seconds during an incoming call.
- **Redial Last Number:** Double-press the Multi-function Button.
- **Activate Voice Assistant (Siri/Google Assistant):** Triple-press the Multi-function Button.
- **Microphone Mute:** Press the Volume Down button and Multi-function Button simultaneously to mute the microphone during a call or intercom. Repeat to unmute.

Volume Adjustment

- **Increase Volume:** Press the Volume Up button.
- **Decrease Volume:** Press the Volume Down button.

Maintenance

Proper maintenance ensures the longevity and optimal performance of your TNICER T2 headset.

- **Cleaning:** Use a soft, damp cloth to clean the exterior of the unit. Do not use harsh chemicals or abrasive cleaners.
- **Storage:** Store the headset in a cool, dry place when not in use. Avoid extreme temperatures.
- **Battery Care:** To preserve battery life, charge the device regularly, even if not in frequent use. Avoid fully discharging the battery for extended periods.
- **Water Resistance:** The T2 is IP67 waterproof. While it can withstand rain and splashes, avoid submerging it in water for prolonged periods. Ensure the USB-C port cover is securely closed when not charging.

Troubleshooting

If you encounter issues with your T2 headset, refer to the following common problems and solutions:

Problem	Possible Cause / Solution
Device does not power on.	Battery is low or depleted. Charge the device fully.
Cannot pair with phone/GPS.	Ensure the T2 is in pairing mode (flashing red/blue). Make sure Bluetooth is enabled on your phone/GPS and it's discoverable. Try restarting both devices.
Intercom connection issues.	Ensure all T2 units are powered on and within range (up to 1000m without obstacles). Re-initiate automatic pairing. Check for obstacles between units.
No sound from speakers.	Check speaker connections to the main unit. Ensure volume is not set to minimum. Verify the device is paired and playing audio.
Microphone not working.	Check microphone connection. Ensure microphone is not muted. Verify correct microphone type is used for helmet.
Poor sound quality / Noise.	Ensure speakers are positioned correctly over ears. Check for wind noise (CVC technology reduces this, but extreme conditions may affect). Move closer to paired devices if range is an issue.

If the problem persists after trying these solutions, please contact TNICER customer support for further assistance.

Specifications

Key technical specifications for the TNICER T2 Motorcycle Bluetooth Headset:

Feature	Specification
Model Name	T2
Connectivity Technology	Wireless (Bluetooth)
Bluetooth Version	5.2
Intercom Range	Up to 1000 meters (between two motorcycles, open field)
Max Intercom Riders	6 riders
Battery Capacity	900mAh Li-Polymer
Music Playback Time	Up to 25 hours
Intercom Time	Up to 20 hours
Standby Time	Up to 600 hours
Noise Reduction	CVC Technology
Water Resistance Level	IP67 Waterproof
Operating Temperature	-15°F and above (as per feature bullets)
Speaker Diameter	40mm (Hi-Fi Speakers)
Music Sharing Distance	20-30 meters

Warranty and Support

For warranty information and customer support, please refer to the official TNICER website or contact their customer service directly. Keep your purchase receipt as proof of purchase for any warranty claims.
Online Support: Visit the TNICER Store on Amazon for product information and support resources.
Protection Plans: Additional protection plans may be available for purchase to extend coverage beyond the standard warranty. Please check product listing details for options.

© 2024 TNICER. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for

conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CTTCM7N6

More documents and user manuals: **https://manuals.plus/**