

CHOVERY CL3

CHOVERY CL-3 Robotic Window Cleaner Instruction Manual

Model: CL3

1. INTRODUCTION

Thank you for choosing the CHOVERY CL-3 Robotic Window Cleaner. This device is designed to simplify window cleaning with its intelligent navigation, powerful suction, and automatic dual-sided spray function. Please read this manual carefully before use to ensure safe and optimal operation.

2. SAFETY INSTRUCTIONS

- Always attach the safety rope securely to a fixed object before operating the robot, especially on high windows. The safety rope is 5 meters long.
- Ensure the robot is used only on framed, vertical glass surfaces. It is not designed for frameless windows.
- The robot has a built-in lithium backup battery that provides approximately 30 minutes of power in case of a power outage, preventing falls. However, do not rely solely on this battery; always use the safety rope.
- Keep hands and loose clothing away from moving parts during operation.
- Do not use the robot in rainy or extremely humid conditions.
- Keep out of reach of children and pets.

3. PACKAGE CONTENTS

Verify that all items are present in the package:

- CHOVERY CL-3 Robotic Window Cleaner
- Remote Control
- Cleaning Pads (multiple pairs)
- Power Adapter and Extension Cable
- Safety Rope
- Water Filling Bottle

4. PRODUCT OVERVIEW

The CHOVERY CL-3 features a sleek design with powerful suction and integrated spray nozzles for efficient cleaning.



Image: The CHOVERY CL-3 Robotic Window Cleaner, showcasing its compact design and dual cleaning pads.

Key features include:

- **Power Button:** To turn the device on/off.
- **Spray Nozzles:** Dual-sided for automatic water/solution application.
- **Cleaning Pads:** Removable and washable microfiber pads.
- **Safety Rope Attachment Point:** For securing the safety rope.
- **Power Inlet:** For connecting the power adapter.
- **Water Tank:** Integrated reservoir for cleaning solution.

Système Récemment Mis à Niveau



Puissance d'aspiration
auto-réglable



67 dB à faible
bruit



Détection automatique
des bords



Prévenir
les chutes



Itinéraire intelligent



Télécommande



Image: An overview of the CHOVERY CL-3's key features, including auto-adjustable suction, low noise, automatic edge detection, fall prevention, intelligent itinerary, and remote control.

5. SETUP

5.1. Charging the Battery

Before first use, fully charge the internal battery. Connect the power adapter to the robot and a power outlet. The indicator light will show charging status.

5.2. Attaching Cleaning Pads

Attach clean microfiber pads to the bottom of the robot. Ensure they are securely fastened.

Puissance d'aspiration auto-ajustable de 3200 Pa

2600-3200 Pa
Nettoyage adéquat

0,05 ml/pulvérisation Grand
réservoir d'eau

5 min/m²
Nettoyage
méticuleux



2600PA		Traces de pluie
2800PA		Poussière
3000PA		Boue
3200PA		Tache d'huile



Image: The CHOVERY CL-3 robot with its two circular cleaning pads attached to the underside.

5.3. Filling the Water Tank

Open the water tank cap and fill it with clean water or a recommended cleaning solution (see Maintenance section for solution ratio). The tank capacity is 50 ml.

5.4. Connecting the Safety Rope

Crucially, attach one end of the safety rope to the robot's safety attachment point and the other end to a sturdy, fixed object indoors. This prevents the robot from falling in case of power loss or suction failure.

Trois modes de nettoyage



De haut en bas



De gauche en bas



De droite en bas



TÉLÉCOMMANDE

Modes manuel/automatique
pour un contrôle facile



Image: The CHOVERY CL-3 robot cleaning a window, with the safety rope clearly visible and attached for security.

5.5. Powering On

Connect the robot to the power adapter. Place the robot on the window surface and press the power button. The robot will adhere to the glass via suction.

6. OPERATING INSTRUCTIONS

6.1. Pre-Cleaning (Optional but Recommended)

If windows are very dusty or dirty, perform a dry cleaning cycle first with dry pads to remove loose debris. This prevents streaks during wet cleaning.

6.2. Selecting Cleaning Modes

The CL-3 offers three automatic cleaning paths. Use the remote control to select your preferred mode:

- **Up to Down:** Cleans from the top of the window downwards.
- **Left to Down:** Cleans from the left side downwards.
- **Right to Down:** Cleans from the right side downwards.

Systeme de pulvérisation double

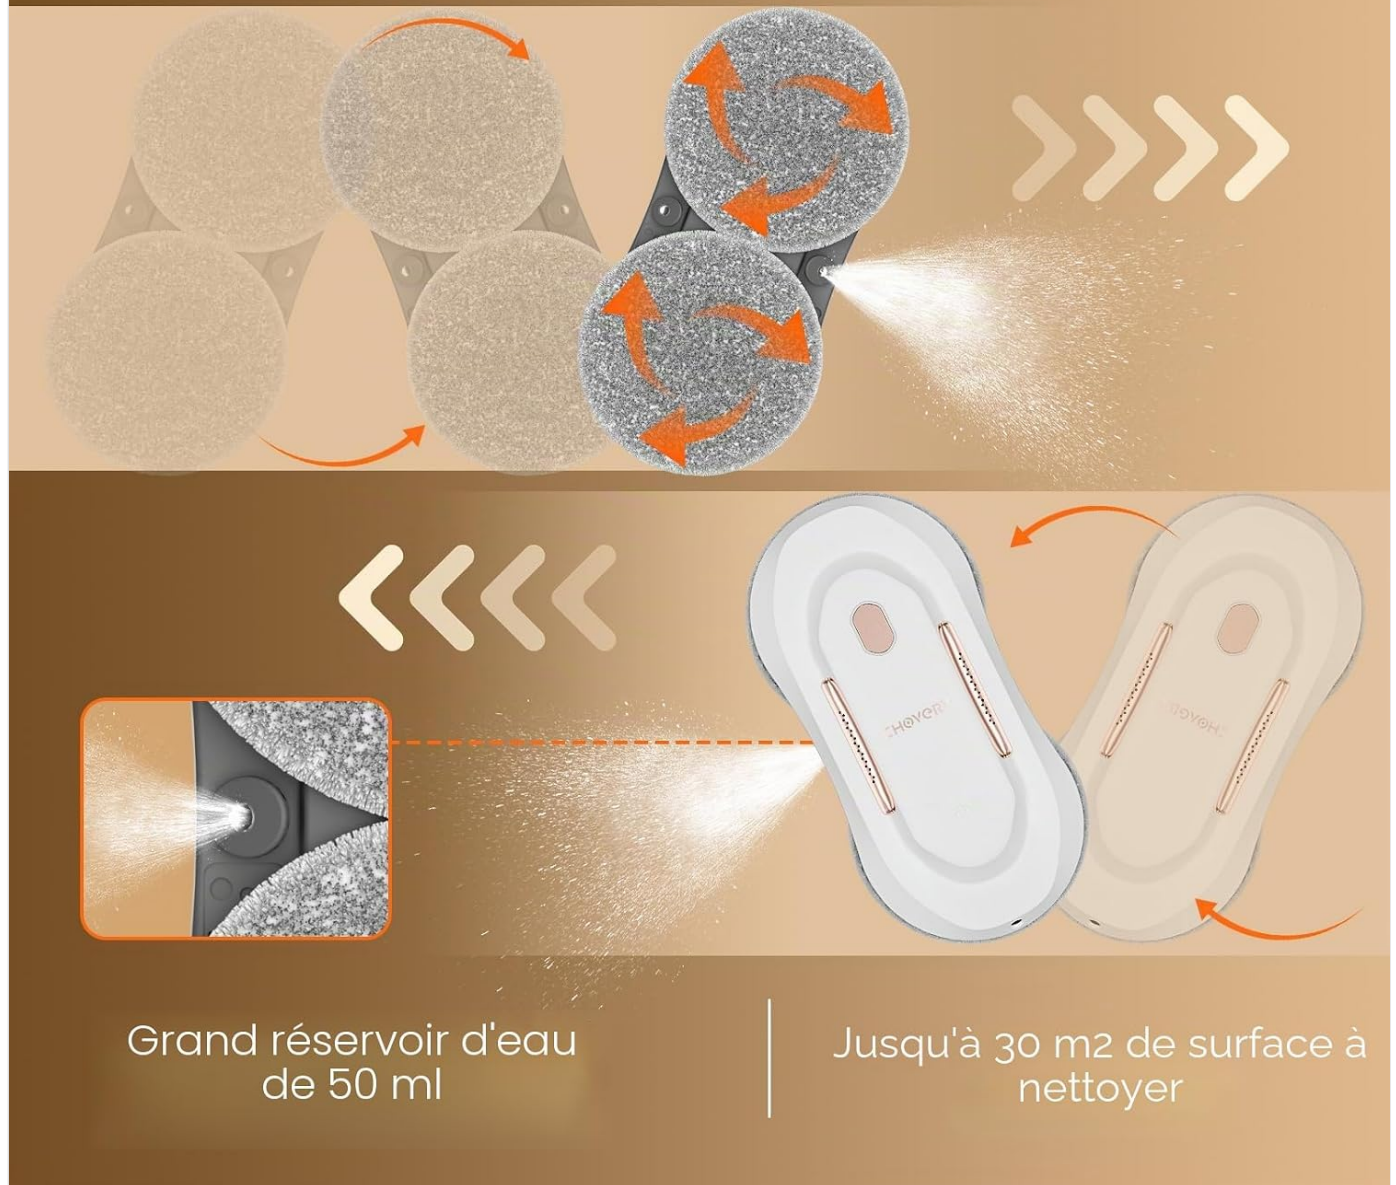


Image: Diagram illustrating the three intelligent cleaning paths: Up to Down, Left to Down, and Right to Down.

6.3. Dual Spray Function

The robot features upgraded dual-sided water outlets for comprehensive cleaning coverage. The automatic spray function can be activated or deactivated via the remote control.

Libérez vos mains
pour profiter de la vie



Image: A close-up diagram showing the dual spray nozzles on the CHOVERY CL-3, demonstrating how water is sprayed from both sides.

6.4. Using the Remote Control

The remote control allows you to start/stop cleaning, select cleaning modes, and control the automatic spray function. It supports both manual and automatic modes.

Robot de nettoyage de vitres intelligent amélioré



Batterie de secours 30 min



67 dB
Bruit réduit



Détection automatique des bords



télécommande



Super propre

Image: The remote control for the CHOVERY CL-3, showing buttons for various functions including mode selection and spray control.

6.5. Versatility

The CHOVERY CL-3 is primarily designed for glass surfaces but can also be used on other smooth, vertical surfaces like mirrors, tiled walls, and kitchen surfaces.

Nettoyer bien plus qu'une simple fenêtre



Image: The CHOVERY CL-3 demonstrating its ability to clean various surfaces including windows, mirrors, tiles, and kitchen surfaces.

7. MAINTENANCE

7.1. Cleaning Pads

For optimal cleaning results, change the microfiber pads every 20 minutes, especially if they become saturated or dirty. Wash used pads with mild detergent and air dry them before reuse.

7.2. Cleaning Solution

Use a mixture of water and detergent. A recommended ratio is 9 parts water to 1 part detergent. Avoid using highly corrosive or foamy cleaning agents.

ÉVITEZ LES TRACES LAISSÉES



CHOISISSEZ LE BON SOLVANT

EAU MÉLANGE
DÉTHERGENT
DEVRAIT ÊTRE

9:1

PRÉ-NETTOYAGE

Si votre vitre est trop sale,
veuillez utiliser le chiffon sec
pour enlever le sable d'abord



Conseil : Changez les tampons
toutes les 20 minutes. Les
tampons imbibés peuvent
laisser des traces !



Image: Illustration showing the recommended 9:1 water to detergent ratio for the cleaning solution and a stack of clean microfiber pads.

7.3. Water Tank

After each use, empty any remaining solution from the water tank and rinse it with clean water. Ensure the tank is dry before storage.

7.4. General Cleaning

Wipe the robot's exterior with a soft, dry cloth. Do not immerse the robot in water.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Robot does not adhere to the window.	Insufficient suction; dirty surface; power issue.	Ensure power is connected. Clean the window surface of large debris. Check for obstructions on suction ports.
Robot leaves streaks.	Dirty or saturated cleaning pads; incorrect cleaning solution; very dirty window.	Replace with clean, dry pads. Use recommended water/detergent ratio. Perform a dry pre-clean if windows are heavily soiled.
Robot does not move or stops unexpectedly.	Power disconnected; obstacle detected; low battery.	Check power connection. Remove any obstacles. Ensure the robot is fully charged before use.
Remote control not responding.	Remote battery low; obstruction between remote and robot.	Replace remote control batteries. Ensure clear line of sight to the robot.

9. SPECIFICATIONS

- **Model Name:** CL3
- **Brand:** CHOVERY
- **Suction Power:** Up to 3800Pa (auto-adjustable)
- **Recommended Surface:** Glass
- **Special Feature:** Portable, Automatic Dual Spray
- **Color:** Gold
- **Product Dimensions (L x W x H):**30 x 15 x 9 cm (11.8 x 5.9 x 3.5 inches)
- **Controller Type:** Remote Control
- **Included Components:** Robot, Remote Control, Cleaning Pads, Power Adapter, Safety Rope, Water Bottle
- **Battery Type:** Lithium-ion
- **Backup Battery Life:** 30 minutes (in case of power cut)
- **Noise Level:** Approximately 67 dB
- **Water Tank Capacity:** 50 ml

CHOVERY

Double Pulvérisation d'eau Automatique

Robot Nettoyeur de Vitres CL-3

Super Aspiration 3800Pa



Image: Infographic detailing the CHOVERY CL-3's auto-adjustable suction power (up to 3800Pa), dimensions, 0.05ml spray volume, 50ml water tank, and cleaning efficiency of 5 min/m².

10. WARRANTY AND SUPPORT

CHOVERY offers a **one-year warranty** for this product. If you encounter any issues or have suggestions, please contact our customer service team via email. Our team is committed to providing a professional solution within 24 hours. For support, please refer to the contact information provided with your purchase or visit the official CHOVERY website.

© 2026 CHOVERY. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question