

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

- › [Z-Lite](#) /
- › **Z-Lite 6 Light Chandelier 6010-24HB Heirloom Brass User Manual**

## Z-Lite 6010-24HB

# Z-Lite 6 Light Chandelier 6010-24HB Heirloom Brass User Manual

Model: 6010-24HB | Brand: Z-Lite

## INTRODUCTION

---

This manual provides detailed instructions for the safe installation, operation, and maintenance of your Z-Lite 6 Light Chandelier, model 6010-24HB, in Heirloom Brass finish. Please read all instructions carefully before beginning installation and retain this manual for future reference.



*Image: The Z-Lite 6 Light Chandelier 6010-24HB in Heirloom Brass finish, showcasing its design and crystal accents.*

## SAFETY INFORMATION

**WARNING:** Risk of electric shock. Disconnect power at the fuse box or circuit breaker before installation or servicing.

Consult a qualified electrician if you are unsure about wiring procedures.

- Ensure all electrical connections comply with local codes and ordinances, as well as the National Electric Code (NEC).
- Use only the specified bulb type and wattage. Exceeding the maximum wattage may cause overheating and damage to the fixture.
- Do not install this fixture on a sloped ceiling without appropriate adapter hardware (sold separately).
- Handle glass components with care to prevent breakage.
- Keep flammable materials away from the light fixture.

## PACKAGE CONTENTS

---

Verify that all components are present before discarding packaging materials. If any parts are missing or damaged, contact Z-Lite customer support.

- Chandelier Frame Assembly
- Mounting Plate / Crossbar
- Canopy
- Downrods (various lengths)
- Wire Nuts / Connectors
- Decorative Nuts / Screws
- Crystal Accents (pre-attached or separate)
- Instruction Manual

## TOOLS REQUIRED FOR INSTALLATION

---

- Phillips Head Screwdriver
- Flat Head Screwdriver
- Wire Strippers
- Pliers
- Electrical Tape
- Ladder
- Voltage Tester (recommended)

## SETUP AND INSTALLATION

---


Follow these steps carefully to install your chandelier. It is recommended to have two people for installation due to the size and weight of the fixture.

### Step 1: Turn Off Power

Locate the circuit breaker or fuse box that controls the power to the light fixture location. Turn off the power completely before proceeding with any electrical work. Verify power is off using a voltage tester.

### Step 2: Prepare Mounting

Carefully unpack all components. Attach the mounting plate/crossbar to the junction box in the ceiling using the provided screws. Ensure it is securely fastened.

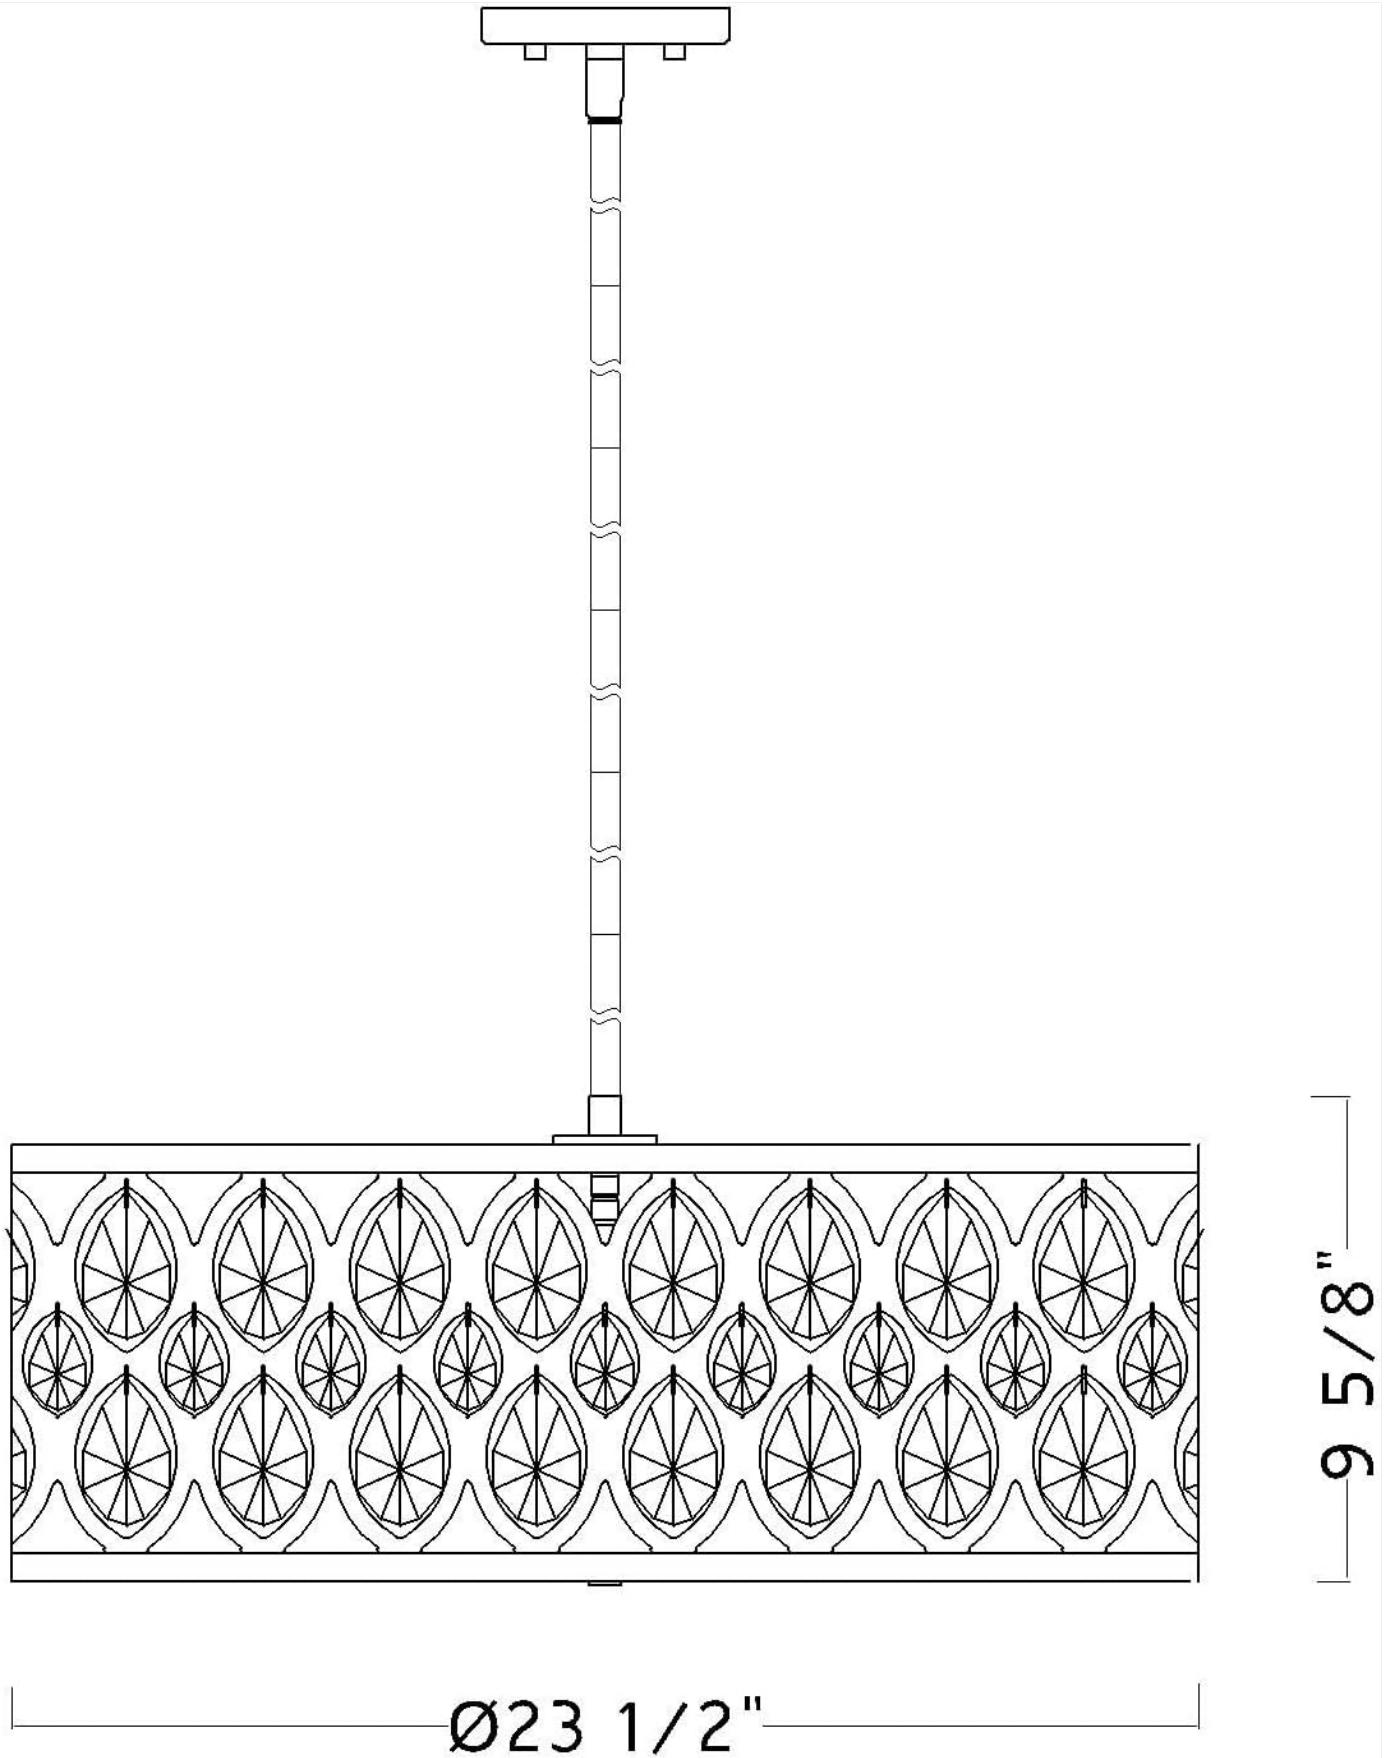

*Image: Technical line drawing illustrating the chandelier's dimensions (23 1/2" diameter, 9 5/8" height) and general mounting structure.*

### Step 3: Assemble Downrods

Determine the desired hanging height for your chandelier. Connect the appropriate downrods together and thread the fixture wires through them. Securely attach the downrod assembly to the top of the chandelier frame.

## Step 4: Wiring Connections

With the power off, connect the fixture wires to the house wires:

- Connect the **black** (or smooth) fixture wire to the **black** (hot) house wire using a wire nut.
- Connect the **white** (or ribbed) fixture wire to the **white** (neutral) house wire using a wire nut.
- Connect the **bare copper** (ground) fixture wire to the **green or bare copper** (ground) house wire, and to the ground screw on the mounting plate.

Ensure all connections are secure and covered with wire nuts. Wrap electrical tape around wire nuts for added security.

## Step 5: Mount Fixture and Canopy

Carefully lift the chandelier and align the downrod with the mounting plate. Secure the canopy to the mounting plate using the decorative nuts or screws provided, ensuring all wires are tucked neatly inside the junction box.





*Image: The Z-Lite 6 Light Chandelier 6010-24HB in Heirloom Brass, fully assembled and ready for bulb installation.*

## Step 6: Install Bulbs

Screw in the appropriate light bulbs (not included) into the sockets. Refer to the specifications section for recommended bulb type and maximum wattage. Do not exceed the maximum wattage.

## OPERATING INSTRUCTIONS

---

Once installation is complete and verified, restore power at the circuit breaker. The chandelier can now be operated using your wall switch. For optimal performance and longevity, use high-quality, dimmable LED bulbs if connected to a dimmer switch.

## MAINTENANCE

---

### Cleaning

To clean the fixture, ensure power is off and the fixture is cool. Wipe with a soft, dry cloth. Do not use abrasive cleaners, polishes, or solvents as they may damage the finish or crystals. For crystal components, a mild glass cleaner can be applied to a soft cloth, then gently wiped.

### Bulb Replacement

Always turn off power at the circuit breaker and allow bulbs to cool before replacing. Unscrew the old bulb and screw in a new one of the same type and wattage. Do not exceed the maximum wattage specified.

## TROUBLESHOOTING

---

Problem	Possible Cause	Solution
Fixture does not light	No power to fixture Loose wire connections Faulty bulb Faulty wall switch	Check circuit breaker/fuse. Verify all wire connections are secure (power off). Replace bulb. Test wall switch or consult electrician.
Flickering lights	Loose bulb Loose wire connection Incompatible dimmer switch	Tighten bulb. Check wire connections (power off). Ensure dimmer is compatible with bulbs.
Humming noise	Incompatible dimmer switch Loose components	Replace dimmer with a compatible one. Check for any loose parts on the fixture.

## SPECIFICATIONS

- Model:** 6010-24HB
- Brand:** Z-Lite
- Finish:** Heirloom Brass
- Material:** Alloy Steel
- Style:** Modern
- Light Fixture Form:** Ceiling Chandelier
- Number of Lights:** 6
- Dimensions:** Approximately 23.5 inches (Diameter) x 9.625 inches (Height)
- Bulb Type:** E12 Candelabra (Bulbs not included)
- Max Wattage per Bulb:** 60W (or as specified on fixture label)
- Voltage:** 120V
- Certifications:** ETL/CETL Certified

## WARRANTY AND SUPPORT

Z-Lite products are manufactured to high standards and are backed by a manufacturer's warranty. For specific warranty details, claims, or technical support, please refer to the warranty card included with your product or visit the official Z-Lite website. Please have your model number (6010-24HB) and purchase date available when contacting support.

**Contact Information:** Please visit [www.z-lite.com](http://www.z-lite.com) for customer service and support resources.