



Manuals.plus /

- › MEELIGHTING /
- › MEELIGHTING W35 Linear Modern Crystal Chandelier User Manual

## MEELIGHTING ML85599B-900mm

# MEELIGHTING W35 Linear Modern Crystal Chandelier User Manual

Model: ML85599B-900mm | Brand: MEELIGHTING

## 1. INTRODUCTION

Thank you for choosing the MEELIGHTING W35 Linear Modern Crystal Chandelier. This manual provides essential information for the safe installation, operation, and maintenance of your new lighting fixture. Please read these instructions thoroughly before beginning installation and retain them for future reference.

## 2. SAFETY INFORMATION

**WARNING:** To reduce the risk of fire, electric shock, or personal injury, always follow these safety precautions:

- Always turn off the main power supply at the circuit breaker before installation, removal, or maintenance.
- Consult a qualified electrician if you are not familiar with electrical installations.
- Ensure the ceiling structure can safely support a weight of up to 80 lbs (36 kg). If not, a sturdy brace is required. Drywall or plaster alone is insufficient.
- Use only the specified bulb type (E12 base) and wattage (max 60 watts per bulb). Bulbs are not included.
- Do not connect the fixture to an ungrounded electrical system.
- Handle crystal components with care to prevent breakage or injury.
- Keep flammable materials away from the light fixture.

## 3. PACKAGE CONTENTS

Verify that all components are present and undamaged before installation. If any parts are missing or broken, contact MEELIGHTING customer support.

- Chandelier Frame (Gold Finish)
- Crystal Prisms (K9 Grade)
- Mounting Hardware (Canopy, Mounting Plate, Screws, Wire Nuts)

- Adjustable Suspension Cables
- Instruction Manual



Image 3.1: Overview of the MEELIGHTING W35 Linear Modern Crystal Chandelier.

## 4. PRODUCT OVERVIEW AND SPECIFICATIONS

The W35 Linear Modern Crystal Chandelier features a matte gold finish and K9 crystal prisms, designed for indoor use. It requires 9 E12 base bulbs (not included) and is dimmable with compatible bulbs and dimmer switch.

### Key Features:

- **Design:** Linear, modern, oval raindrop style with K9 crystal.
- **Finish:** Spray-painted matte gold.
- **Dimmable:** Yes, with compatible E12 dimmable bulbs and dimmer switch.
- **Bulb Base:** E12 (9 bulbs required, not included).
- **Adjustable Height:** Cord length adjustable up to 60 inches.

### Dimensions:

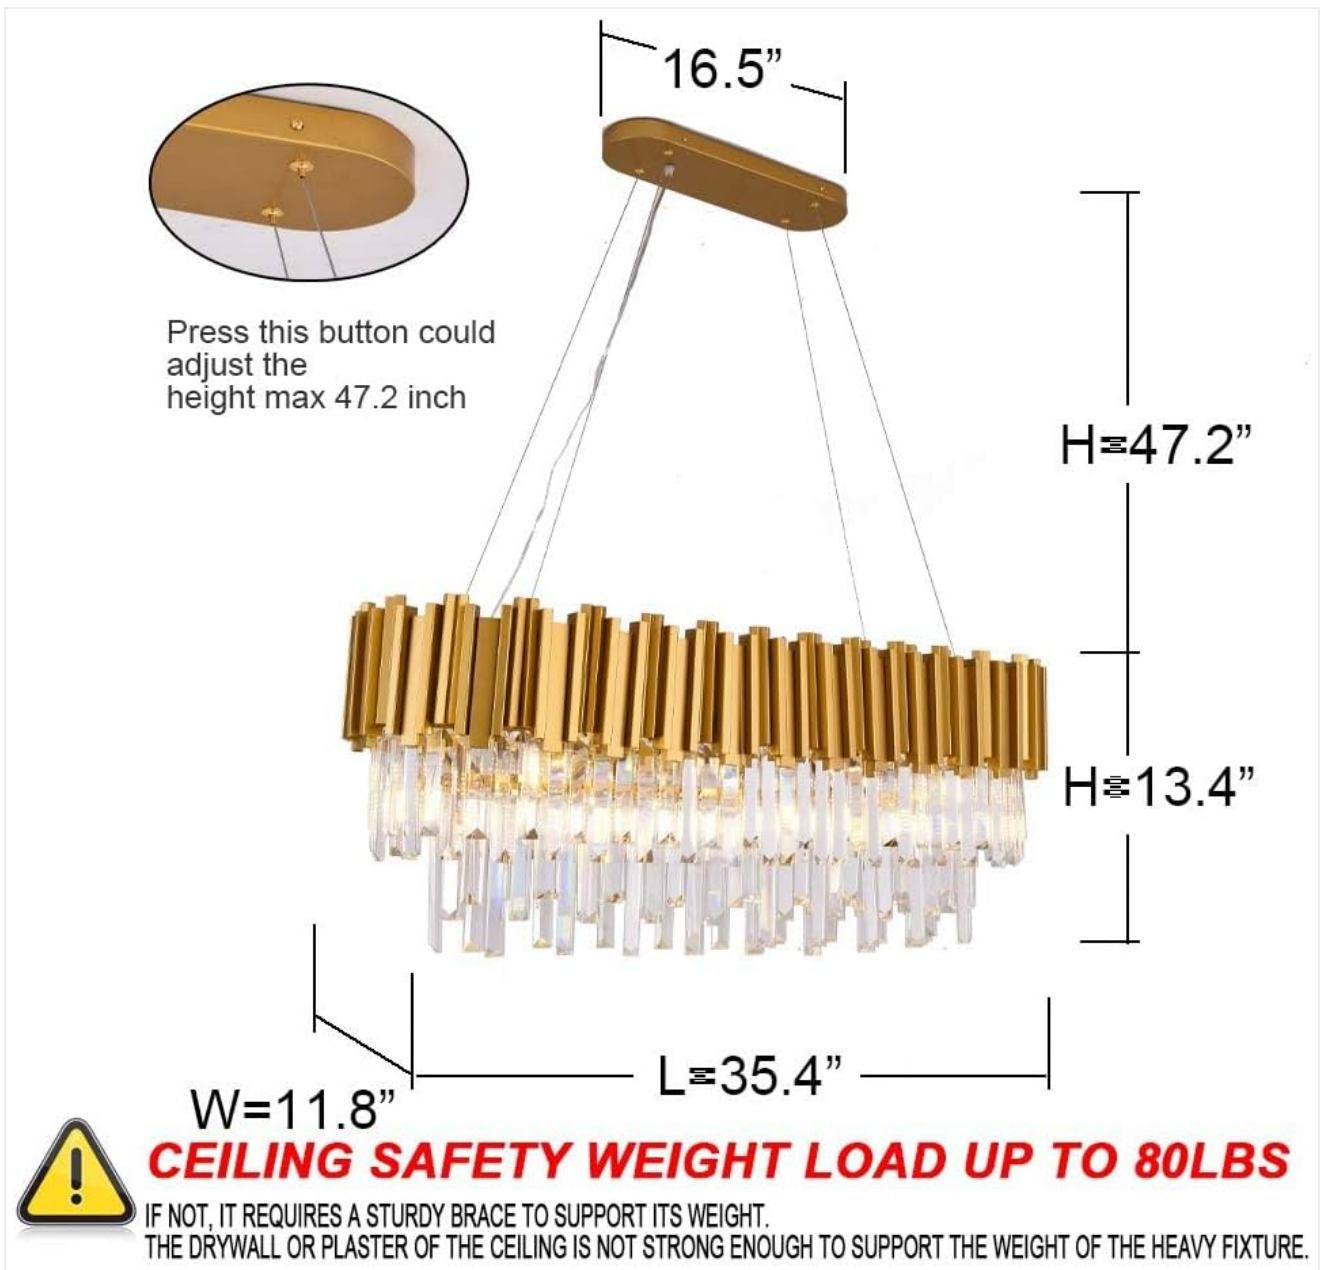


Image 4.1: Detailed dimensions of the chandelier. Fixture dimensions are approximately 35.43" (L) x 11.8" (W) x 13.8" (H). The maximum adjustable cord length is 60 inches.

### Material and Finish Details:

Video 4.1: Official product video showcasing the MEELIGHTING Linear Modern Crystal Chandelier, highlighting its design and features. This video demonstrates the spray-painted gold finish and the K9 crystal elements.



Image 4.2: Close-up view of the chandelier's spray-painted gold finished frame, showcasing the quality of the metalwork.



Image 4.3: Detailed view of the K9 crystal prisms, illustrating their clarity and light-refracting properties.

## 5. SETUP AND INSTALLATION

Installation requires basic electrical knowledge. If you are unsure, please consult a professional electrician.

### Pre-Installation Checklist:

- Ensure power is OFF at the circuit breaker.
- Gather necessary tools: screwdriver, wire strippers, electrical tape, ladder.
- Confirm all parts are present and undamaged.

### Step-by-Step Installation:

1. **Mounting Plate Installation:** Attach the mounting plate to the junction box in the ceiling using the provided screws. Ensure it is securely fastened.
2. **Wiring:** Connect the chandelier's wires to your household electrical wires. Match live (black/red) to live, neutral (white) to neutral, and ground (green/bare copper) to ground. Secure connections with wire nuts and electrical tape.

- 3. Canopy Attachment:** Carefully push the canopy up to the ceiling, covering the junction box and mounting plate. Secure it with the provided screws or nuts.
- 4. Adjust Height:** Adjust the suspension cables to achieve the desired hanging height. Press the button on the canopy to release and adjust the cable length.
- 5. Install Bulbs:** Screw in 9 E12 base bulbs (not included) into the sockets.
- 6. Attach Crystal Prisms:** Carefully hang each K9 crystal prism onto the designated hooks on the chandelier frame. This step may take significant time.
- 7. Restore Power:** Once all crystals are securely attached and connections are checked, restore power at the circuit breaker.

## 6. OPERATING INSTRUCTIONS

---

The MEELIGHTING W35 Chandelier operates like a standard ceiling light fixture.

- Turning On/Off:** Use your wall switch to turn the chandelier on or off.
- Dimming Function:** If you have installed dimmable E12 bulbs and a compatible dimmer switch, you can adjust the light intensity using the dimmer control.

## 7. MAINTENANCE

---

Regular cleaning and maintenance will help preserve the beauty and functionality of your chandelier.

- Cleaning the Frame:** Dust the metal frame regularly with a soft, dry cloth. For stubborn marks, use a slightly damp cloth and dry immediately. Avoid abrasive cleaners.
- Cleaning Crystals:** The K9 crystals can be cleaned with a soft, lint-free cloth dampened with a mild glass cleaner or distilled water. Ensure no liquid drips into electrical components.
- Bulb Replacement:** Always turn off power at the circuit breaker before replacing bulbs. Allow bulbs to cool completely before handling.
- Inspection:** Periodically check all connections and hanging components for security.

## 8. TROUBLESHOOTING

---

If you encounter issues with your chandelier, refer to the following table for common problems and solutions.

Problem	Possible Cause	Solution
Light does not turn on	No power supply Loose wiring Faulty bulb	Check circuit breaker Verify wire connections (power off) Replace bulb
Lights flicker	Loose bulb Incompatible dimmer/bulb Loose wiring	Tighten bulb Ensure dimmer and bulbs are compatible Check wiring (power off)
Chandelier hangs unevenly	Uneven cable adjustment	Adjust suspension cables until level
Crystals fall off	Improper attachment	Re-attach crystals securely to their hooks

## 9. TECHNICAL SPECIFICATIONS

---

Specification	Detail
Model Name	ML85599B-900mm
Brand	MEELIGHTING
Product Dimensions	35.4"L x 11.8"W x 60.6"H (Adjustable)
Material	Metal, K9 Crystal
Finish Type	Matte Gold
Number of Light Sources	9
Bulb Base	E12
Wattage	Max 60 watts per bulb
Voltage	110 Volts
Special Feature	Dimmable (with compatible bulbs/switch)
Indoor/Outdoor Usage	Indoor use only
Item Weight	26.8 Pounds
UPC	651354842336

## 10. WARRANTY AND SUPPORT

MEELIGHTING offers a 5-year manufacturer's warranty on this product, covering parts. For technical advice, customer support, or warranty claims, please contact MEELIGHTING directly.

- **Warranty Type:** Seller (5-year manufacturer's warranty on parts).
- **Customer Support:** Available 24/7 for technical advice.
- **Contact:** Refer to your purchase documentation or the MEELIGHTING official website for contact details.