

[manuals.plus](#) /

› [ALLIANCE LAUNDRY SYSTEMS](#) /

› [ALLIANCE LAUNDRY SYSTEMS Timer Bracket for Large Vault Washer & Dryer \(Model 200832\) - Instruction Manual](#)

## ALLIANCE LAUNDRY SYSTEMS 200832

# ALLIANCE LAUNDRY SYSTEMS Timer Bracket (Model 200832) Instruction Manual

For Large Vault Washers & Dryers

## 1. INTRODUCTION

This manual provides essential information for the proper installation and maintenance of the ALLIANCE LAUNDRY SYSTEMS Timer Bracket, Model 200832. This component is designed as a replacement part for large vault washers and dryers manufactured by Huebsch, Speed Queen, and Alliance Laundry Systems. Please read these instructions carefully before proceeding with installation.

## 2. SAFETY INFORMATION

### **WARNING:**

- Always disconnect power to the appliance before attempting any installation, maintenance, or repair. Failure to do so can result in serious injury or death.
- Wear appropriate personal protective equipment, such as gloves and eye protection, during installation.
- If you are unsure about any step, consult a qualified appliance technician.
- This part may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm (Proposition 65 warning). Handle with care and wash hands after handling.

## 3. PACKAGE CONTENTS

Verify that all items are present in the package:

- 1 x ALLIANCE LAUNDRY SYSTEMS Timer Bracket (Model 200832)

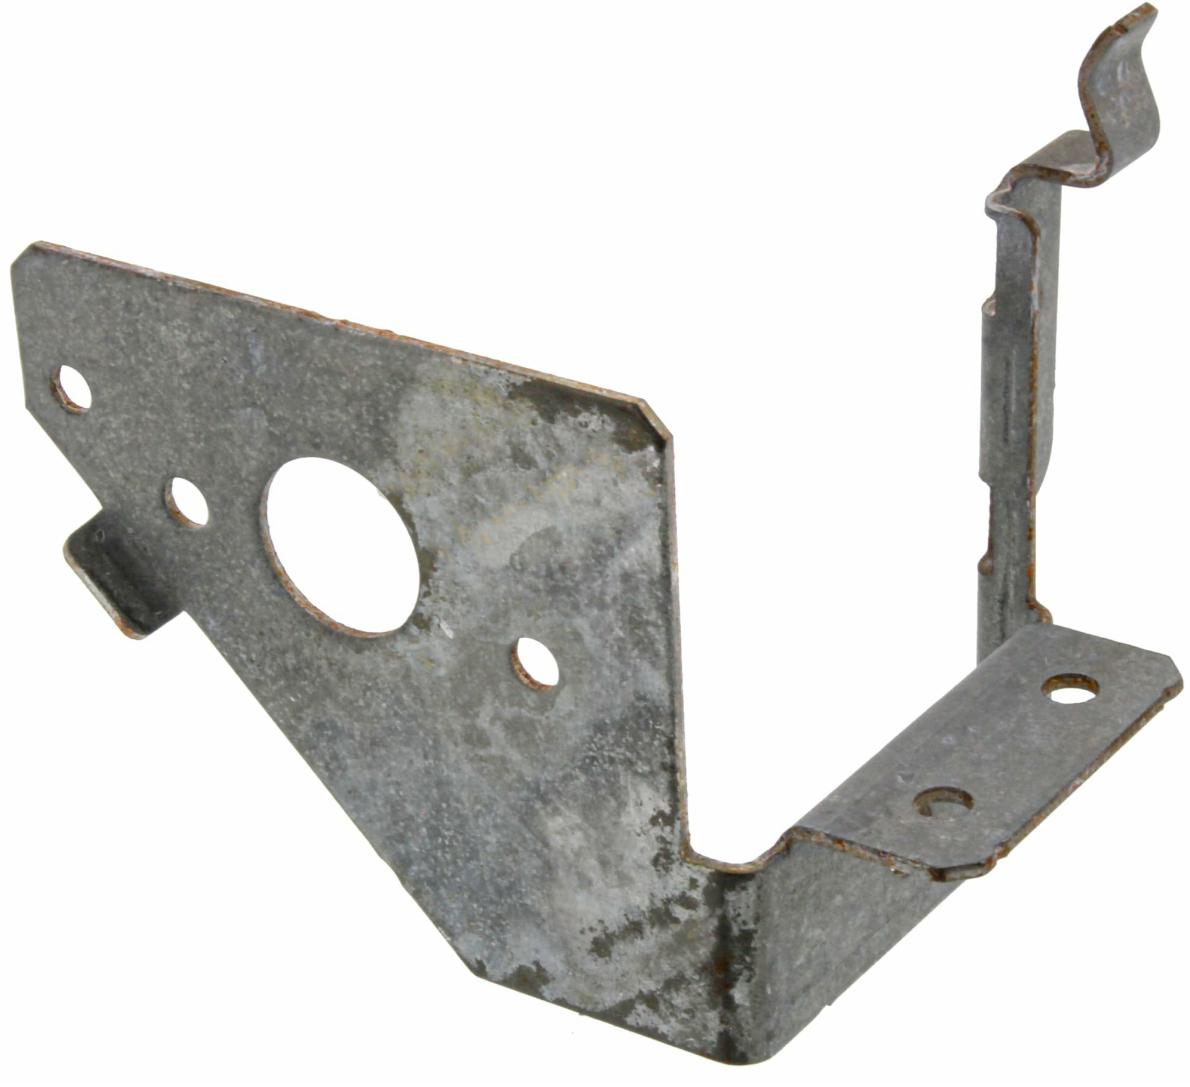


Image showing the ALLIANCE LAUNDRY SYSTEMS Timer Bracket, Model 200832, a replacement part for large vault washers and dryers.

## 4. INSTALLATION INSTRUCTIONS

This timer bracket is a replacement part. Installation typically involves removing the old bracket and securing the new one. Specific steps may vary depending on your appliance model. Refer to your appliance's service manual for detailed instructions.

- 1. Disconnect Power:** Ensure the washer or dryer is completely disconnected from its power source.
- 2. Access Timer Area:** Depending on your appliance, you may need to remove the control panel, top cover, or front panel to access the timer assembly.
- 3. Identify Old Bracket:** Locate the existing timer bracket. Note how it is attached and any wires or components connected to it. It is recommended to take photos for reference.
- 4. Remove Old Bracket:** Carefully detach any components from the old bracket, then unfasten the screws or clips holding the old bracket in place. Remove the old bracket.
- 5. Install New Bracket:** Position the new ALLIANCE LAUNDRY SYSTEMS Timer Bracket (Model 200832) in the same location. Secure it using the original fasteners or new ones if provided and compatible.
- 6. Reattach Components:** Reconnect any wires or components that were detached from the old bracket to the new one. Ensure all connections are secure.
- 7. Reassemble Appliance:** Reattach any panels or covers that were removed.

8. **Restore Power:** Once fully reassembled, reconnect the appliance to its power source.
9. **Test Functionality:** Test the appliance to ensure the timer and other controls function correctly.

## 5. FUNCTION AND PURPOSE

The Timer Bracket (Model 200832) serves to securely hold the timer mechanism within the control panel of compatible large vault washers and dryers. A properly functioning bracket ensures the timer remains stable, allowing for accurate operation and preventing damage to the timer unit or associated wiring due to vibration or movement.

## 6. MAINTENANCE

This timer bracket is a passive component and requires minimal maintenance. Periodically, during other appliance servicing, inspect the bracket for signs of wear, corrosion, or damage. Ensure all mounting screws remain tight. If any damage is observed, replacement is recommended.

## 7. TROUBLESHOOTING

- **Bracket Does Not Fit:** Double-check the model number of your appliance and ensure it is compatible with part 200832. Verify that the old bracket was removed completely and that no obstructions are present.
- **Timer Malfunction After Installation:** Ensure all electrical connections to the timer are secure and correctly reattached. Verify that no wires were pinched or damaged during reassembly. If issues persist, consult a qualified technician.
- **Loose Bracket:** Ensure all mounting screws are tightened securely. Avoid overtightening, which can strip threads.

## 8. SPECIFICATIONS

<b>Part Number:</b>	200832
<b>Manufacturer:</b>	Alliance Laundry Systems
<b>Item Weight:</b>	3.68 ounces
<b>Package Dimensions:</b>	8 x 8 x 6 inches
<b>Item Package Quantity:</b>	1
<b>Compatibility:</b>	Huebsch, Speed Queen, Alliance Laundry Systems Washer/Dryer

## 9. WARRANTY AND SUPPORT

For warranty information or technical support regarding the ALLIANCE LAUNDRY SYSTEMS Timer Bracket (Model 200832), please contact your original point of purchase or the manufacturer directly. Keep your purchase receipt as proof of purchase.

Manufacturer Contact: Alliance Laundry Systems

*Note: Specific warranty terms may vary.*

