

Manuals.plus /

› Surebonder /

› Surebonder Cordless/Corded High-Temperature Mini Hot Glue Gun Instruction Manual

## Surebonder CL-195F

# Surebonder Cordless/Corded High-Temperature Mini Hot Glue Gun

MODEL: CL-195F

### Introduction

The Surebonder CL-195F is a versatile high-temperature mini hot glue gun designed for detailed crafting and various DIY projects. It offers both cordless and corded operation, providing flexibility for different tasks. The fine tip ensures precise glue placement, making it ideal for intricate work. This manual provides essential information for safe and effective use of your new glue gun.



## Safety Information

- Always operate the glue gun on a stable, heat-resistant surface.
- Do not touch the hot nozzle or melted glue. The tip and glue can reach high temperatures and cause burns.
- Keep out of reach of children. Adult supervision is required when children are using the tool.
- Never leave the glue gun unattended while it is powered on or heating.
- Ensure the power cord is not damaged and is kept away from hot surfaces.
- Use only mini glue sticks compatible with high-temperature glue guns.
- Unplug the glue gun when not in use or before cleaning.

## Package Contents

Verify that all items are present in your package:

- Surebonder CL-195F Mini Hot Glue Gun
- Heating Base/Stand with built-in Glue Pad
- 5 ft. Power Cord (for base or direct gun connection)

## Setup

### 1. Powering the Unit

The Surebonder CL-195F can be used in two modes: cordless or corded.

#### Cordless Operation Setup:

1. Connect the 5 ft. power cord to the heating base/stand.
2. Plug the power cord into a standard 120V electrical outlet.
3. Place the glue gun onto the heating base. Ensure the contacts on the gun align with the contacts on the base for proper charging and heating.



Figure 2: Cordless operation by lifting the glue gun from its base.

#### Corded Operation Setup:

1. For continuous use, the power cord can be plugged directly into the port at the bottom of the glue gun's handle.

2. Plug the other end of the power cord into a standard 120V electrical outlet.



Figure 3: Corded operation with the power cord plugged directly into the glue gun.

## 2. Inserting Glue Sticks

Insert a mini hot glue stick (0.28 inch / 7mm diameter) into the circular opening at the back of the glue gun. Push it gently until it stops. Do not force the glue stick.

## Operating Instructions

### 1. Power On

Locate the ON/OFF switch on the side of the glue gun. Slide the switch to the 'ON' position. A power indicator light will illuminate, indicating the gun is heating.



Figure 4: Power indicator light and ON/OFF switch location.

### 2. Heating Time

Allow the glue gun to heat up for approximately 3-5 minutes. The high-temperature setting ensures a strong, long-lasting bond.

### 3. Cordless Use (Intermittent)

Once heated, lift the glue gun off the heating stand. It can be used cordless for up to 2 minutes. For longer cordless periods, return the gun to the heating stand periodically to maintain temperature and reheat.

### 4. Dispensing Glue

Gently squeeze the trigger to dispense melted glue from the fine tip nozzle. The fine tip allows for precise application, making it suitable for detailed work. Apply glue to one surface and press the surfaces together



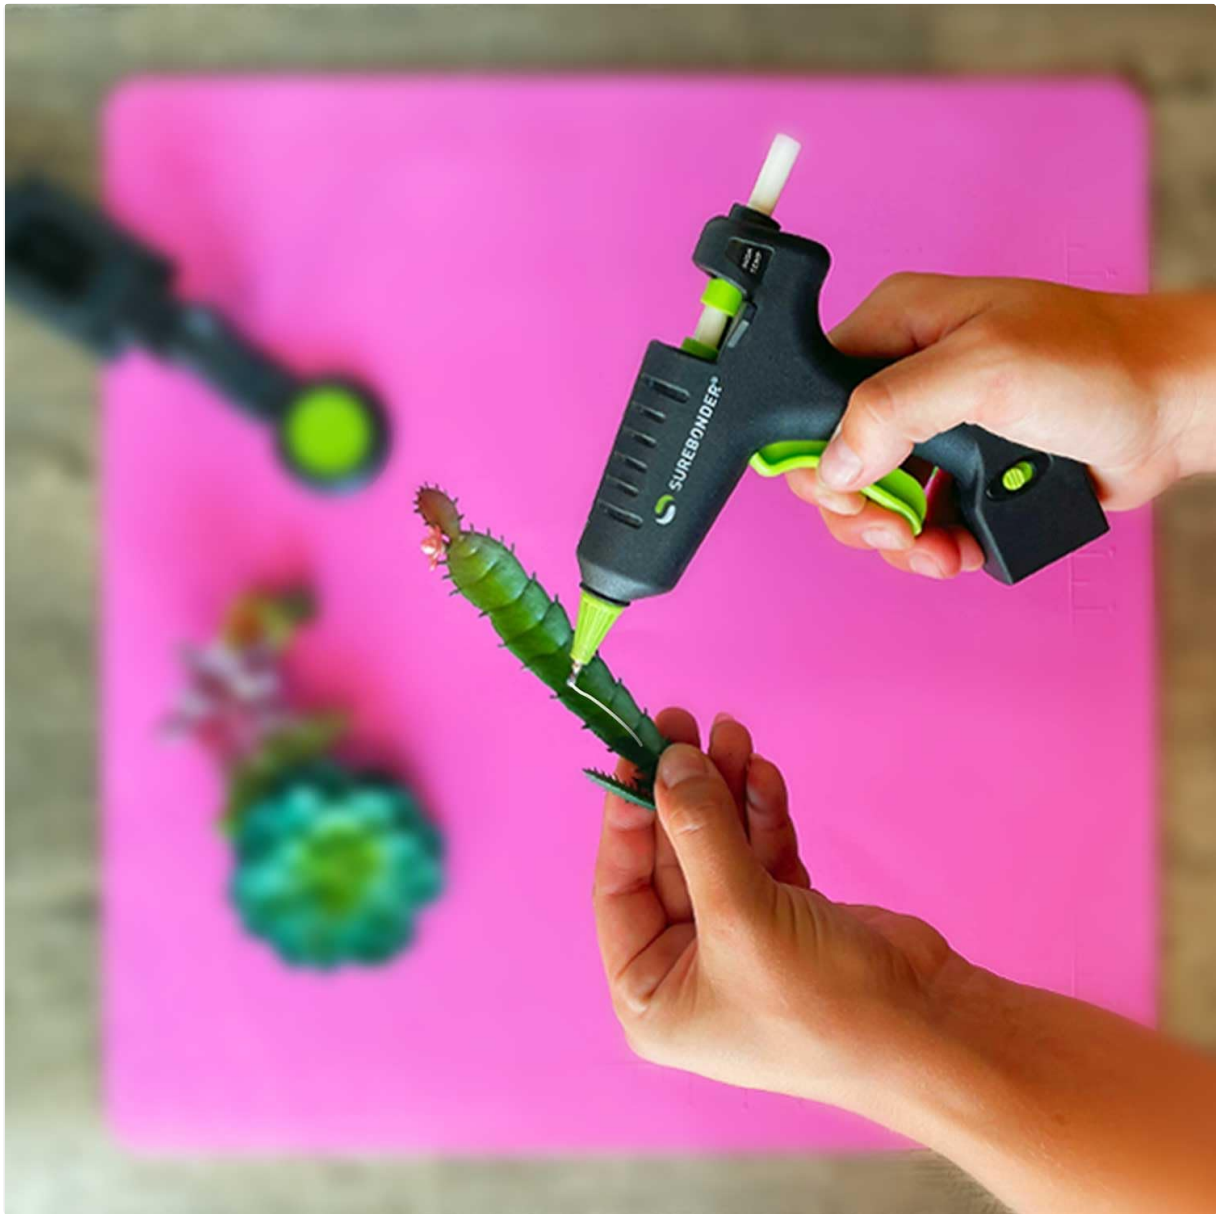


Figure 6: The non-stick glue pad on the heating stand.

### Storage:

Store the glue gun and its stand in a cool, dry place, away from direct sunlight and extreme temperatures. Ensure the gun is completely cool before storing.

### Troubleshooting

- **Glue not flowing:** Ensure the glue gun is fully heated. Check if the glue stick is properly inserted and if there's enough glue stick remaining to be fed.
- **Gun not heating:** Verify that the power cord is securely plugged into both the outlet and the heating base/gun. Check if the ON/OFF switch is in the 'ON' position and the power indicator light is on.
- **Gun not staying hot in cordless mode:** The cordless operation is designed for intermittent use (up to 2 minutes off the base). Return the gun to the heating stand frequently to maintain optimal temperature.
- **Stand instability:** Ensure the stand is placed on a flat, stable surface. The stand is designed to be sturdy and prevent tipping.

### Specifications

Specification	Detail
Model Number	CL-195F
Power Source	Corded Electric
Wattage	20 watts
Voltage	120 Volts
Item Weight	0.55 Pounds (approx. 8.8 ounces)
Product Dimensions (L x W x H)	8.25" x 3.5" x 10.6"
Compatible Material	Fabric, Glass, Metal, Wood
Glue Stick Size	Mini (0.28 inch / 7mm diameter)

### Warranty and Support

This Surebonder product is covered by a **90-Day Manufacturer Warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use.

For warranty claims, technical support, or product inquiries, please contact Surebonder customer service. Refer to the product packaging or the official Surebonder website for the most current contact information.

*Please retain your proof of purchase for warranty validation.*